


Purchaser:	P.O. #	Date:
Project:	Location:	
Engineer:	Architect:	
Submitted By:	For Approval:	For Reference:

ITEM	PLAN DESIGNATION	QUANTITY	COOLING BTU/H	VOLTAGE	FRIEDRICH MODEL

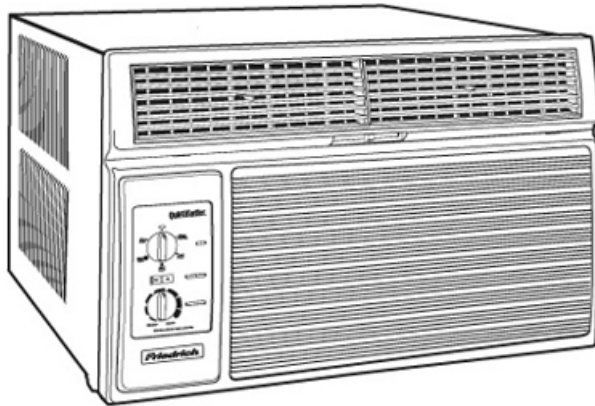

FEATURES

- Ultra-quiet operation
- Super high energy efficiency
- Slide-out chassis
- MoneySaver[®] option
- Fresh air intake and exhaust vents
- Eight-way air flow control
- Four cooling speeds plus fan-only setting
- Easy access, easy-to-clean filter
- Copper tube/aluminum fin coils
- Totally enclosed fan motor
- Window mount kit included
- Made in the U.S.A. of U.S. and imported parts
- UL listed and AHAM certified

Model	Cooling BTU/h	Heating BTU/h	Volts	Amps	EER	Height in.	Width in.	Depth in.	Circuit Breaker	Net Weight lbs.
KS10L10	10000	----	115	8	11.5	15-15/16	25-15/16	27-3/8	125V-15A	115
KS12L10	11600	----	115	9	11	15-15/16	25-15/16	27-3/8	125V-15A	114
KM15L10	14500	----	115	12.2	10.8	17-15/16	25-15/16	27-3/8	125V-15A	128
KS12L30	12200	----	230/208	5.4/5.0	10.0	15-15/16	25-15/16	27-3/8	250V-15A	106
KM18L30	17800	----	230/208	8.1/8.8	10	17-15/16	25-15/16	27-3/8	250V-15A	161
KM21L30	20600	----	230/208	9.4/10.1	9.9	17-15/16	25-15/16	27-3/8	250V-20A	154
KM24L30	23500	----	230/208	11.2/12.1	9.5	17-15/16	25-15/16	27-3/8	250V-20A	154

Notes:
