
Frigidaire

## **Dryer Cutout Dimensions**

Models: All front console

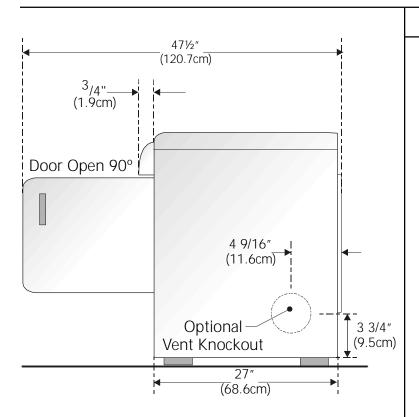

## - Dimensions

Unit width: 26 7/8"

Unit height: 36"

Unit height (under counter): 34 5/8"

Unit depth from wall: 27"

Depth from wall with dryer door open: 47 1/2"

Distance from floor to centerline of vent: 3 3/4"

Distance from right side of

dryer to centerline of vent: 13 1/2"

Distance from floor to centerline

of gas supply pipe: 1 1/2"

Distance from left side of dryer to

centerline of gas supply pipe: 29/16"

Distance from floor to centerline

of electrical connection: 33"

Distance from right side of dryer to

centerline of electrical connection: 27/8"

## Additional Information

- Minimum clearance to sides, rear, and top is 0".
- If installed in a closet, minimum clearance to front is 1".
- If installed in a closet, a minimum of 120 square inches of opening, equally divided at the top and the botttom of the door, is required.
- Electrical requirements:


Electric - 240 volt, single phase, 60 Hz., AC. Individual 30 amp branch circuit fused with 30 amp minimum time delay fuses or circuit breakers. Gas - 120 volt, single phase, 60 Hz., AC. Individual 15 amp branch circuit fused with a 15 amp minimum time delay fuse or circuit breaker.

• Exhaust requirements:

4" diameter minimum rigid or flexible metal duct with approved vent hood (see installation instructions for duct lengths).

Exhaust Direction

Electric - Rear, right or left side, bottom Gas - Rear, right side, bottom

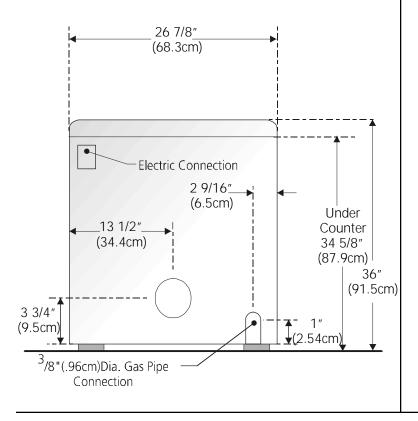

This information is subject to change without notice. Please refer to the installation instructions that came with your unit.