




**Monogram®**

## ZEK958SF/WF/BF – GE Monogram 27" Convection Double Oven

### Dimensions and Specifications (in inches)

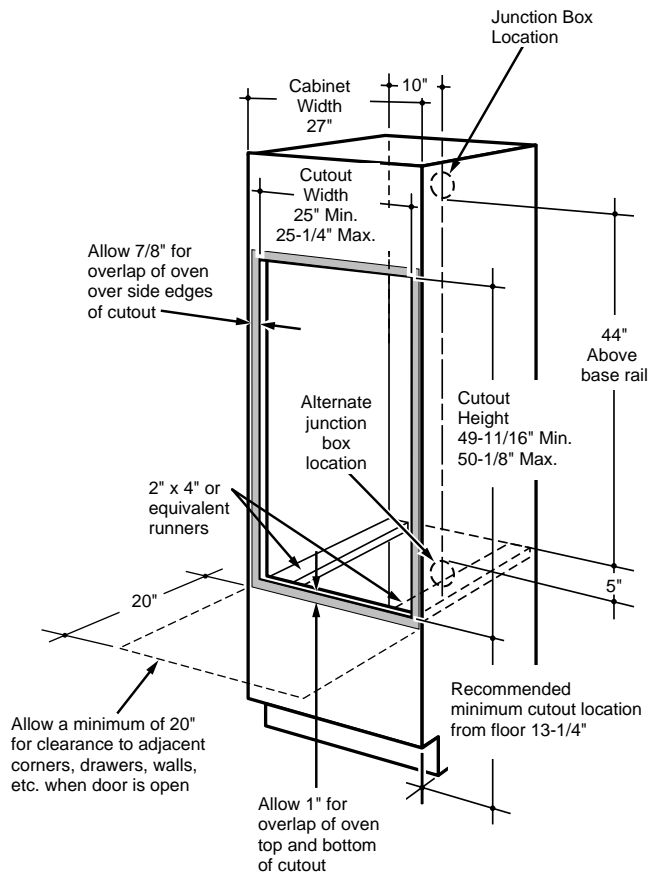


If the cabinet does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. For double ovens, the runners and braces must support 275 lbs.

**Note: If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.**

### Cutout Dimensions

Cabinet Width	27"
Recommended Minimum Cutout Location from Floor	13-1/4"
Cutout Depth	23-5/8" Min.
Cutout Width	25" Min. 25-1/4" Max.
Cutout Height	49-11/16" Min. 50-1/8" Max.

**Note: If cabinet does not have a front frame and the sides are less than 3/4" thick, shim both sides equally to establish the cutout width.**

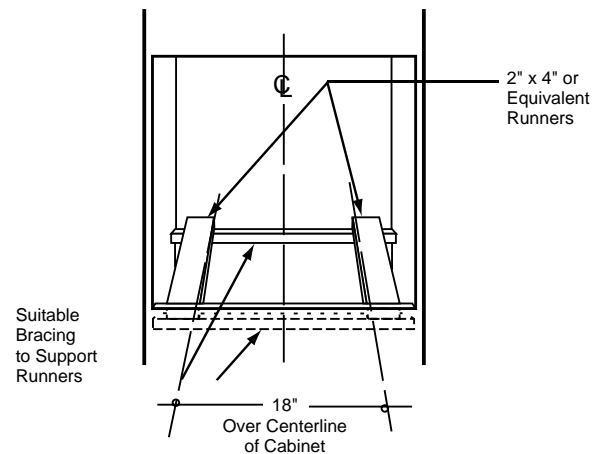


Listed by  
Underwriters  
Laboratories

For answers to your Monogram® GE Profile™ or GE appliance questions, visit our website at [GEAppliances.com](http://GEAppliances.com) or call GE Answer Center® service, 800.626.2000.



**Monogram®**

## **ZEK958SF/WF/BF – GE Monogram 27" Convection Double Oven**

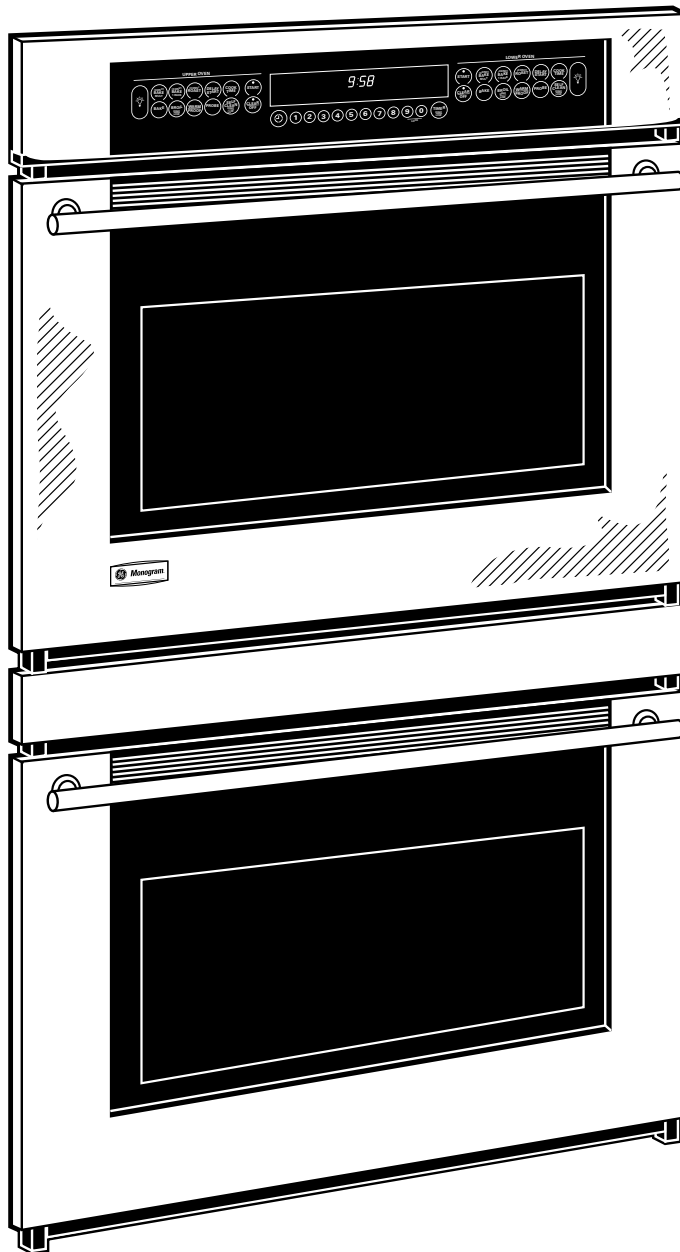

### **Features and Benefits**

- Self-Cleaning Convection Ovens with Self-Clean Delay Option
- Convection Bake and Convection Roast with Convection Conversion
- 3 Heavy Duty Oven Racks with 4 Positions (Each Oven)
- Automatic Meat Thermometer (Each Oven)
- 2 Halogen Interior Oven Lamps (Each Oven)
- 3400 Watt Variable Broil with 4-Pass Broil Element
- 6-Pass Bake Element
- Model ZEK958SFSS – Stainless steel
- Model ZEK958WFWW – White on white
- Model ZEK958BFBB – Black on black