


Purchaser:	P.O. #	Date:
Project:	Location:	
Engineer:	Architect:	
Submitted By:	For Approval:	For Reference:

ITEM	PLAN DESIGNATION	QUANTITY	COOLING BTU/H	VOLTAGE	FRIEDRICH MODEL

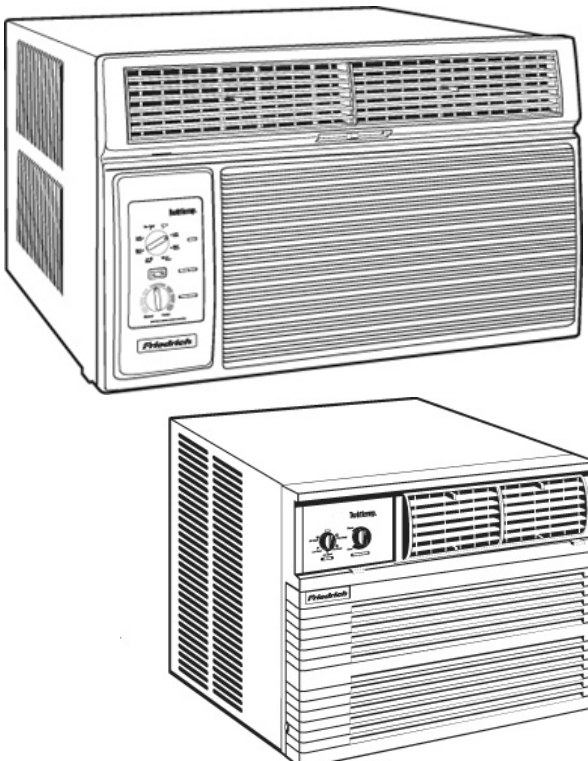

**YQ07L10**

**FEATURES**

- Ultra-quiet operation
  - Super high energy efficiency
  - Slide-out chassis
  - MoneySaver® option\*
  - Fresh air intake and exhaust vents\*
  - Eight-way air flow control
  - Three cooling and heating speeds plus fan-only setting\*
  - Back-up electric heat on 230/208 volt models
  - Easy access, easy-to-clean filter
  - Copper tube/aluminum fin coils
  - Totally enclosed fan motor
  - Optional window mount kits available
  - Made in the U.S.A. of U.S. and imported parts
  - UL listed and AHAM certified
- \* features not available on YQ07J10

Model	Cooling BTU/h	Heating BTU/h*	Volts	Heating Amps	EER	Height in.	Width in.	Depth in.	Circuit Breaker	Weight lbs.
YQ07L10	7200	6000	115	5.9	9.5	14	19-3/4	21-3/8	125V-15A	78
YS09L10	9200	7400	115	6.9	12	15-15/16	25-15/16	27-3/8	125V-15A	113
YS13L33	12700	11000	230/208	5.1/5.6	11	15-15/16	25-15/16	27-3/8	250V-20A	117
YM18L34	18000	16800	230/208	8.5/9.0	9.5	17-15/16	25-15/16	27-3/8	250V-30A	166
YL24L35	24000	22000	230/208	11.0/12.0	10.0	20-3/16	28	33-5/8	250V-30A	198

\*Heating capacity at 47°F. YQ07J10 and YS09J10B do not have back-up heat and will not provide heat at temperatures below 40°F.

Notes:

---



---