




Profile™

JP931BH/KH/SH/TH – GE Profile™ 30" Built-In CleanDesign Cooktop

Cabinet Installation Dimensions (in inches)

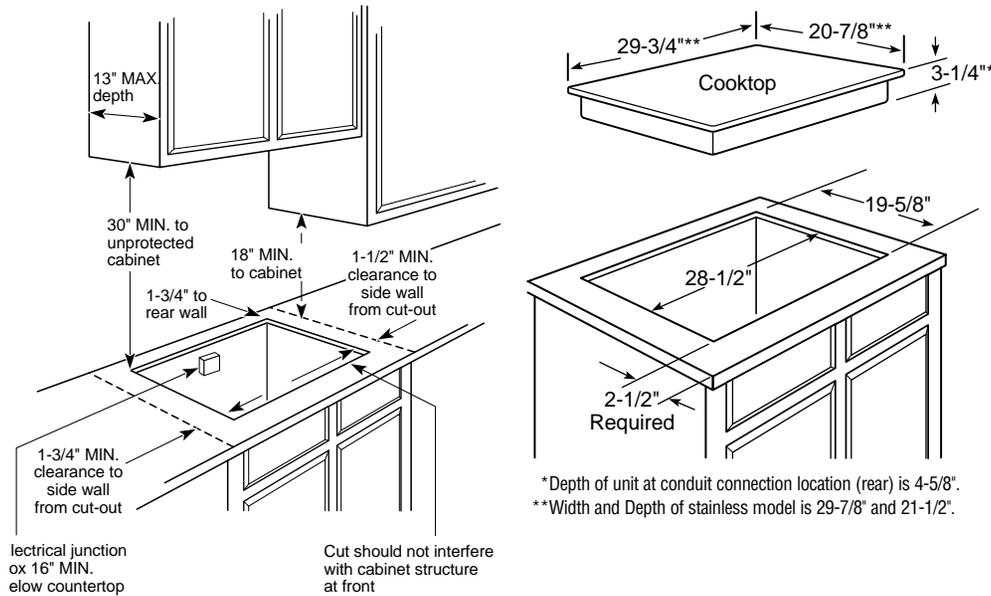

*Depth of unit at conduit connection location (rear) is 4-5/8".
 **Width and Depth of stainless model is 29-7/8" and 21-1/2".

KW Rating	
240V	7.6
208V	5.7
Breaker Size	
240V	32 Amps [†]
208V	27 Amps [†]

[†]Note: Check local codes for required breaker size.

Built-In CleanDesign Cooktops

Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

30" Ribbon cooktops are approved for use over GE 30" Single Wall Ovens and warming drawers. All 30" Ribbon cooktops can be installed over 27" wall ovens. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

Notes: If installing with a GE Profile Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.

Note: Consult cabinet and countertop manufacturer's specs for flush mount installation prior to install.

Flush Mount Installation Kit

Accommodates both 30" and 36" installations. Not for use with stainless steel models.

JXFLMTWW (True White)

JXFLMCC (True Bisque)

JXFLMBB (Black – use with black glass cooktops with a white, bisque or black pattern)

Installation Information:

Before installing, consult installation instructions packed with product for current dimensional data.




Listed by
Underwriters
Laboratories

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Profile™

JP931BH/KH/SH/TH – GE Profile™ 30" Built-In CleanDesign Cooktop

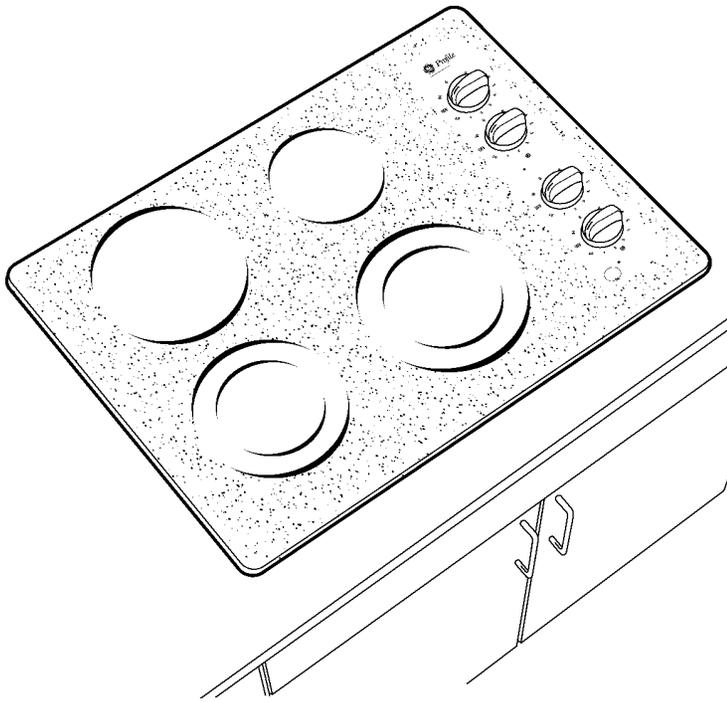

Features and Benefits

- Ceramic Glass Cooktop – A smooth cooktop surface makes cleaning quick and easy.
- Ribbon Heating Elements – Provides powerful heat beneath the smooth glass surface to ensure even heat and fast warm-up times.
- Dual Size Ribbon Elements – Offers a convenient choice of using a 6" or 9" on one and a 5" or 8" on the other heating element, depending of the size of the pan.
- Frameless Design – A smooth and seamless cooktop surface makes cleaning and easy.
- Hot Surface Indicator Lights – Illuminates when the cooking surface is active and hot, adding convenience and safe caution.
- Model JP931KHCC – True bisque
- Model JP931BHBB – Black on black
- Model JP931SHSS – Stainless steel
- Model JP931THWW – White on white