




Monogram®

ZET958SF/WF/BF – GE Monogram 30" Convection Double Oven

Dimensions and Specifications (in inches)

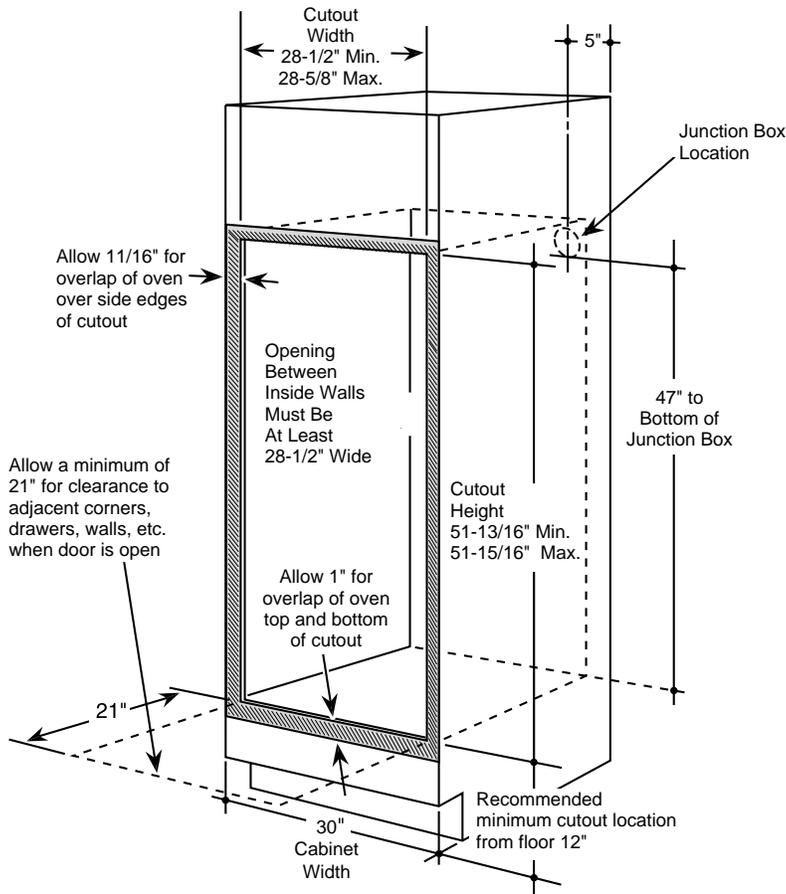


If the cabinet does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. For double ovens, the runners and braces must support 275 lbs.

Note: If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.

Cutout Dimensions

Cabinet Width	30"
Recommended Minimum Cutout Location from Floor	12"
Cutout Depth	23-1/2" Min.
Cutout Width	28-1/2" Min. 28-5/8" Max.
Cutout Height	51-13/16" Min. 51-15/16" Max.

Note: If cabinet does not have a front frame and the sides are less than 3/4" thick, shim both sides equally to establish the cutout width.

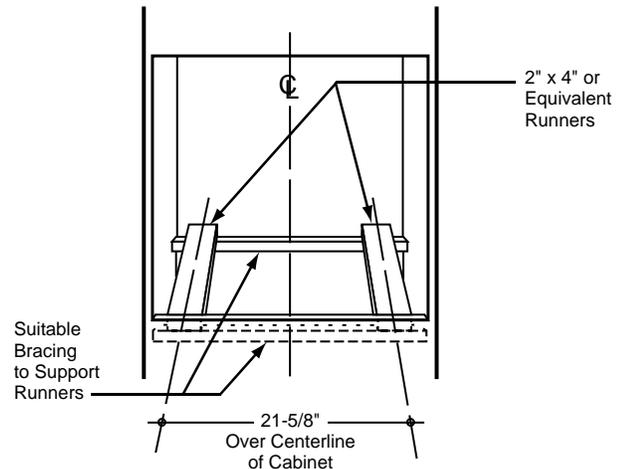


Listed by
Underwriters
Laboratories

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Monogram®

ZET958SF/WF/BF – GE Monogram 30" Convection Double Oven

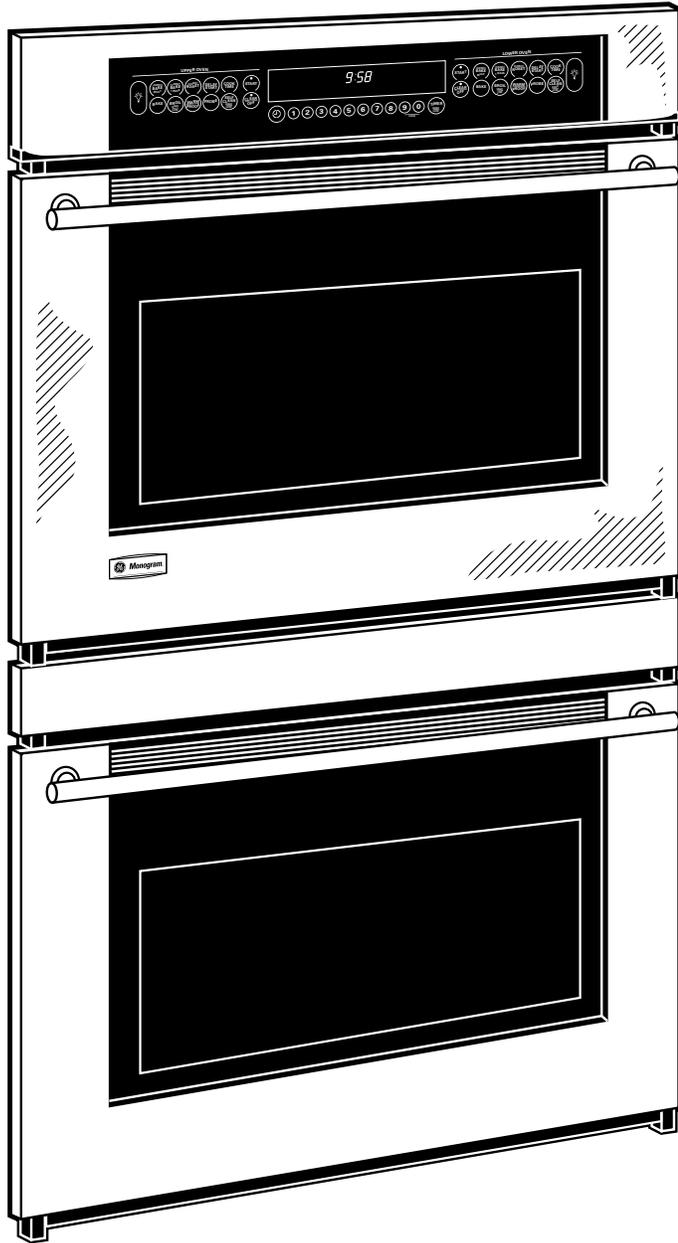

Features and Benefits

- Self-Cleaning Convection Ovens with Self-Clean Delay Option
- Convection Bake and Convection Roast with Convection Conversion
- 3 Heavy Duty Oven Racks with 7 Positions (Each Oven)
- Automatic Meat Thermometer (Each Oven)
- 2 Halogen Interior Oven Lamps (Each Oven)
- 3400 Watt Variable Broil with 4-Pass Broil Element
- 6-Pass Bake Element
- Model ZET958SFSS – Stainless steel
- Model ZET958WFWW – White on white
- Model ZET958BFBB – Black on black