


Purchaser:	P.O. #	Date:
Project:	Location:	
Engineer:	Architect:	
Submitted By:	For Approval:	For Reference:

ITEM	PLAN DESIGNATION	QUANTITY	COOLING BTU/H	VOLTAGE	FRIEDRICH MODEL

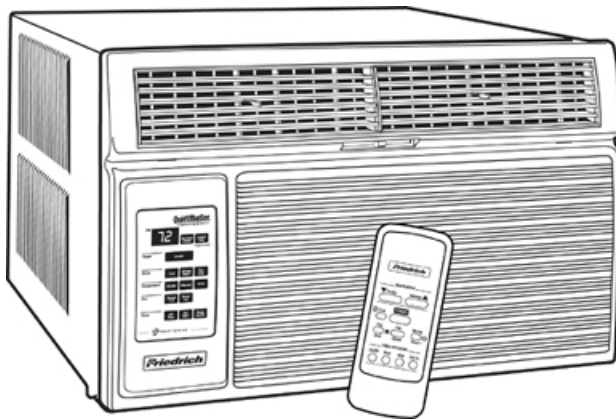

FEATURES

- Ultra-quiet operation
- Super high energy efficiency
- SmartCenter® electronic controls
 - One-Touch cooling
 - 24-hour digital timer
 - Four-speed fan with ultra-quiet "sleep" setting
 - Filter alert
 - Smart fan
 - Money-Saver® option
 - Fan-only setting
- Remote control on select models
- Slide-out chassis
- Fresh air intake and exhaust vents
- Eight-way air flow control
- Easy access, easy-to-clean filter
- Copper tube/aluminum fin coils
- Totally enclosed fan motor
- Window mount kit included
- Made in the U.S.A. OF U.S. and imported parts
- UL listed and AHAM certified

Model	Cooling BTU/h	Heating BTU/h	Volts	Amps	EER	Height in.	Width in.	Depth in.	Circuit Breaker	Weight lbs.
SS08L10	8400	----	115	6.6	11.4	15-15/16	25-15/16	27-3/8	125V-15A	108
SS09L10	9100	----	115	7.2	11.5	15-15/16	25-15/16	27-3/8	125V-15A	113
SS10L10	10400	----	115	7.5	12.0	15-15/16	25-15/16	27-3/8	125V-15A	115
SS12L10	11800	----	115	9.0	11.8	15-15/16	25-15/16	27-3/8	125V-15A	114
SS14L10	14000	----	115	12.0	10.7	15-15/16	25-15/16	27-3/8	125V-15A	128
SS12L30	12100	----	230/208	4.8/5.0	11.5 / 11.7	15-15/16	25-15/16	27-3/8	250V-15A	114
SS16L30	16200	----	230/208	7.4/8.0	9.8 / 9.6	15-15/16	25-15/16	27-3/8	250V-15A	119
SM18L30	17800	----	230/208	7.3/8.0	11 / 11	17-15/16	25-15/16	27-3/8	250V-15A	163
SM21L30	20600	----	230/208	9.4/10.1	9.7 / 10.0	17-15/16	25-15/16	27-3/8	250V-15A	154

Notes:
