




Monogram®

ZET938SF/WF/BF – GE Monogram 30" Convection Single Oven


Dimensions and Specifications (in inches)

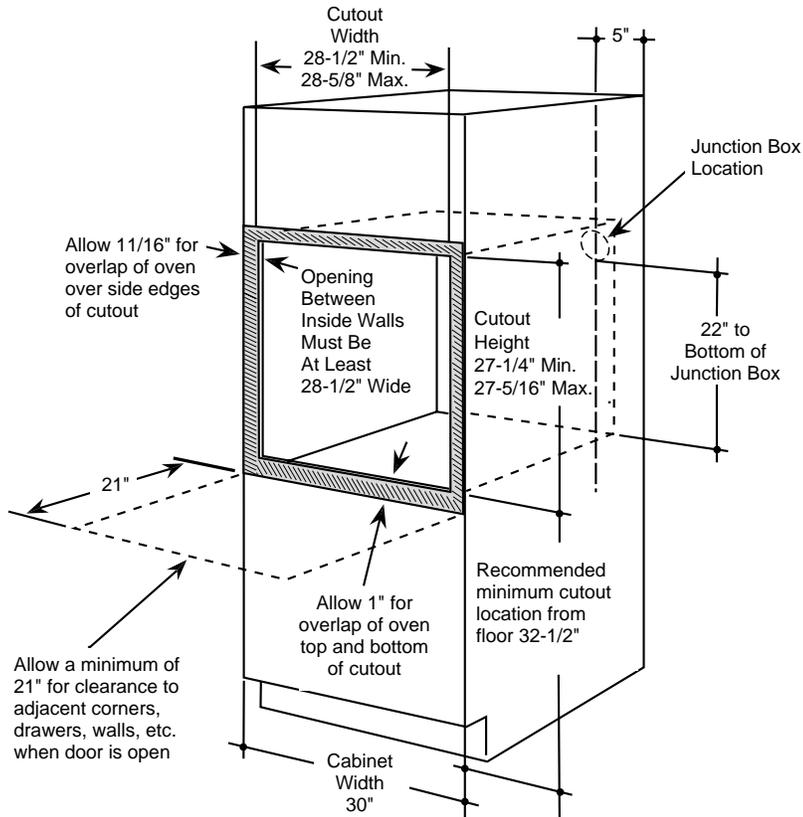

Cutout Dimensions

Cabinet Width	30"
Recommended Minimum Cutout Location from Floor	32-1/2"
Cutout Depth	23-1/2" Min.
Cutout Width	28-1/2" Min. 28-5/8" Max.
Cutout Height	27-1/4" Min. 27-5/16" Max.

Note: If cabinet does not have a front frame and the sides are less than 3/4" thick, shim both sides equally to establish the cutout width.

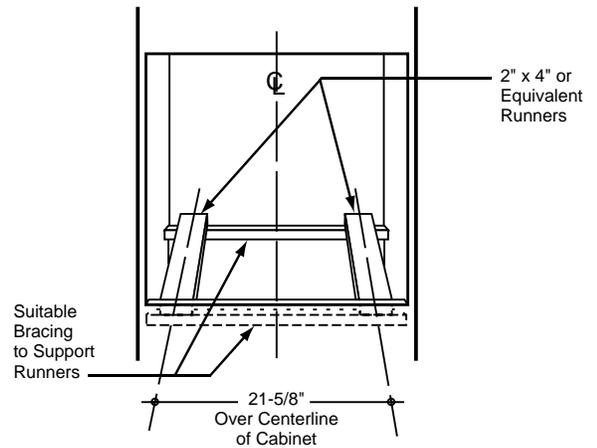

If the cabinet does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. For single ovens, the runners and braces must support 150 lbs.

Note: If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.

This oven is not approved for stackable or side by side installation.




Listed by
Underwriters
Laboratories

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Monogram®

ZET938SF/WF/BF – GE Monogram 30" Convection Single Oven

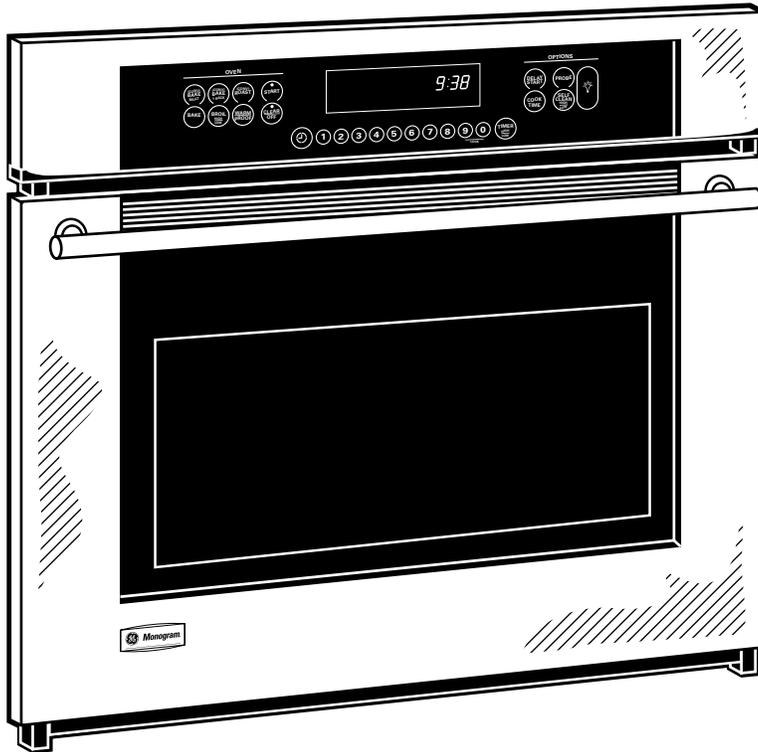

Features and Benefits

- Self-Cleaning Convection Oven with Self-Clean Delay Option
- Convection Bake and Convection Roast with Convection Conversion
- 3 Heavy Duty Oven Racks with 7 Positions
- Automatic Meat Thermometer
- 2 Halogen Interior Oven Lamps
- 4000 Watt Variable Broil with 6-Pass Broil Element
- 8-Pass Bake Element
- Model ZET938SFSS – Stainless steel
- Model ZET938WFWW – White on white
- Model ZET938BFBB – Black on black