

EHD & MHD Hoods




091805


9" High Hoods

1/2


PLANNING GUIDE

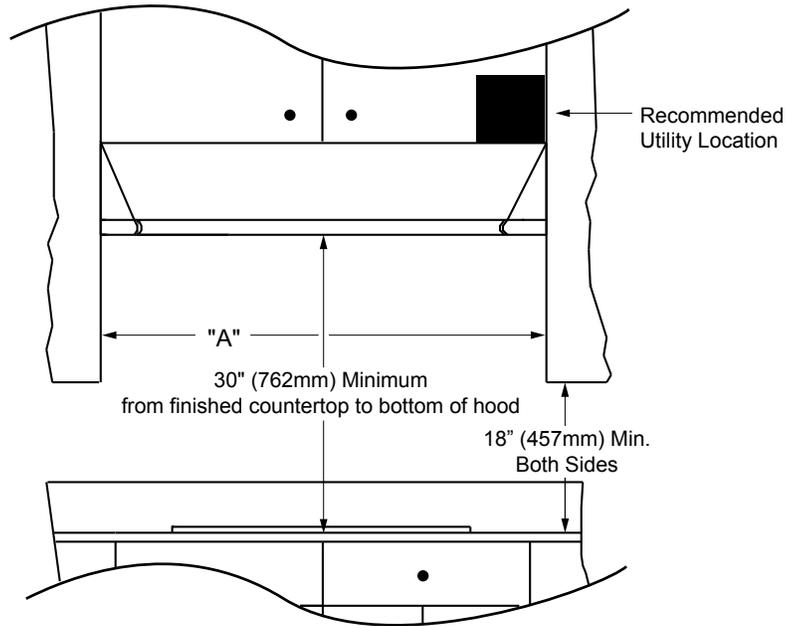

UPPER CABINET DIMENSIONS
(Upper Cabinets 13" (330mm) Maximum Depth)

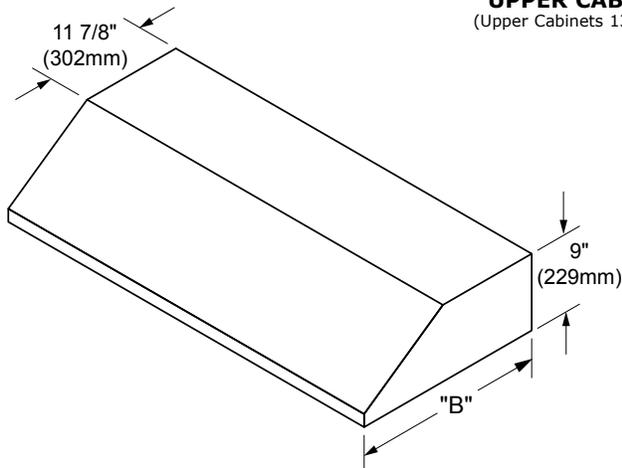


OVERALL DIMENSIONS

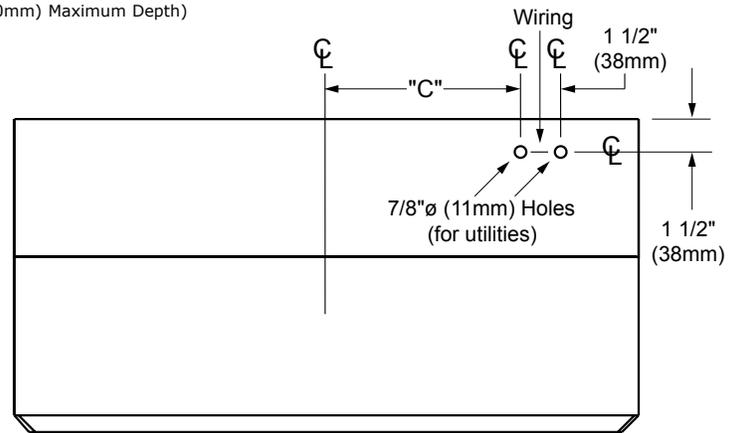


HOOD TOP VIEW ELECTRICAL LOCATION

Model No.	"A" Cutout Width	"B" Overall Depth	"C" Conduit Location	Dedicated Circuit Required	Total Connected Load	Approximate Shipping Weight
EHD3009	30" (762mm)	24" (610mm)	9" (229mm)	120VAC, 60Hz, 15A (Breaker)	1.4kW (12A)	67 lbs.
EHD3609	36" (915mm)		8" (203mm)			68 lbs.
EHD4209	42" (1067mm)		17" (432mm)			85 lbs.
EHD4809	48" (1219mm)		14 7/16" (367mm)			92 lbs.
EHDR3009	30" (762mm)		9" (229mm)			59 lbs.
EHDR3609	36" (915mm)		8" (203mm)			64 lbs.
EHDR4209	42" (1067mm)		17" (432mm)			86 lbs.
EHDR4809	48" (1219mm)		14 7/16" (367mm)			80 lbs.
MHD3009	30" (762mm)	22 1/2" (571mm)	9" (229mm)			49 lbs.
MHD3609	36" (915mm)		8" (203mm)			58 lbs.
MHD4809	48" (1219mm)		14 7/16" (367mm)	100 lbs.		


EHD & MHD Hoods

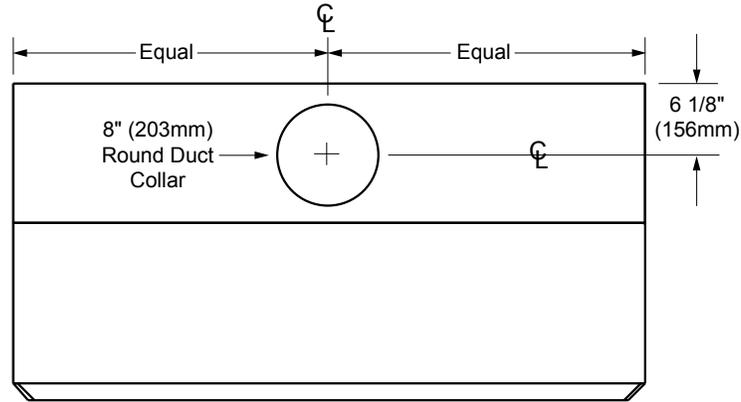

**HOOD TOP VIEW
EXHAUST LOCATION**
(3009/3609 Models Only)

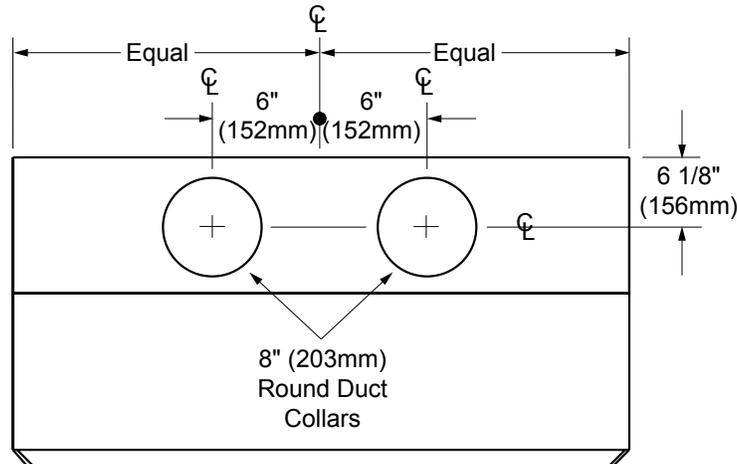

**HOOD TOP VIEW
EXHAUST LOCATION**
(4209/4809 Models Only)

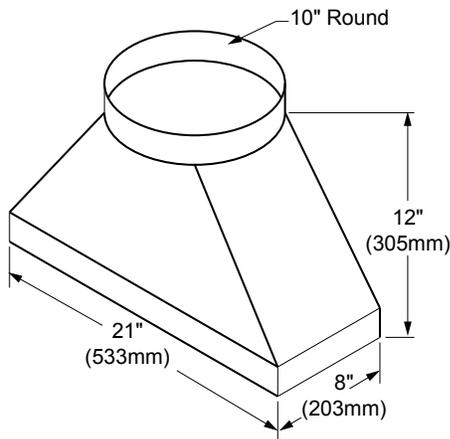

**ATD10
RECOMMENDED CUSTOM TRANSITION**
(For use with 4209/4809 Models)



NOTES:

1. An Internal Blower is included with EHD/MHD models. Blower Ratings: 1200 CFM on EHD/MHD 48" and 42", 600CFM on EHD/MHD 36" and 30".
2. Remote Blower is required for EHDR models.