


Upright Freezer

EILFU17G S




17 Cu. Ft. Capacity

Contains 17 cubic feet of freezer storage space to accommodate a large amount of food and frozen items. Versatile and convenient to use, this unit offers two Luxury-Glide™ full-width baskets, four glass shelves and five door shelves, including two that tilt out for easy access.



Fast Freeze™ Option

Freezes food faster to lock in freshness.



Alarm System

Notifies you if there's been a power failure, if a door stays open longer than five minutes and if the interior temperature of the freezer rises above 23 degrees for more than 60 minutes.



Frost-Free Design

The freezer defrosts itself so you don't have to. With the automatic Ice Maker, you'll always have extra ice on hand.



17 CU. FT. UPRIGHT FREEZER

| | |
|--------------|-----|
| ENERGY STAR® | Yes |
|--------------|-----|

Capacities

| | |
|--------------|--------------|
| Total Volume | 16.8 Cu. Ft. |
| Shelf Area | 20 Sq. Ft. |

Features

| | |
|--|-----|
| IQ-Touch™ Electronic Controls | Yes |
| Digital Exterior Control Center | Yes |
| Frost-Free Performance | Yes |
| Adjustable Temp Control | Yes |
| Display Temp Mode (°C or °F) | Yes |
| Fast Freeze™ | Yes |
| High-Temperature Alarm System | Yes |
| System Error Alarm | Yes |
| Interior Lighting | Yes |
| Power-On Light | Yes |
| Adjustable Glass Shelves | 2 |
| Fixed Glass Shelves | 2 |
| Luxury-Glide™ Full-Width Freezer Baskets | 2 |
| Adjustable Door Shelves | 2 |
| Fixed Door Shelves | 1 |
| Tilt-Out Wire Door Shelves | 2 |
| Automatic Ice Maker | Yes |

Additional Features

| | |
|---|-----|
| Signature Soft-Arc Door and Handle Design | Yes |
| Lock with Pop-Out Key | Yes |
| Automatic Door Closer | Yes |
| Defrost Drain | Yes |
| Adjustable Leveling Legs | 2 |

Accessories

| | |
|-------------------|----------|
| Pizza Shelf | Included |
| Small Items Shelf | Included |
| 2 Basket Dividers | Included |

Color / UPC (0-12505-)

| | |
|---------------------|---------|
| Stainless Steel (S) | 22528-4 |
|---------------------|---------|


Specifications

| | |
|--|--------------------|
| Overall Exterior Dimensions – | |
| Height (Adjustable) | 65-1/2" – 66-1/2" |
| Width | 32" |
| Depth (to Center of Arc) (with 90° Door Open) | 27-1/2" 57-3/8" |
| Voltage Rating | 115V/60Hz/15A |
| Connected Load (kW Rating) @ 115 Volts† | 0.62 |
| Minimum Circuit Required (Amps) | 15 |
| Power Supply Connection Location | Right Bottom Rear |
| Water Inlet Location | Left Bottom Rear |
| Product Weight | 204 Lbs. |
| Shipping Weight (Approx.) | 224 Lbs. |

†An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at www.electroluxappliances.com.

Specifications subject to change.

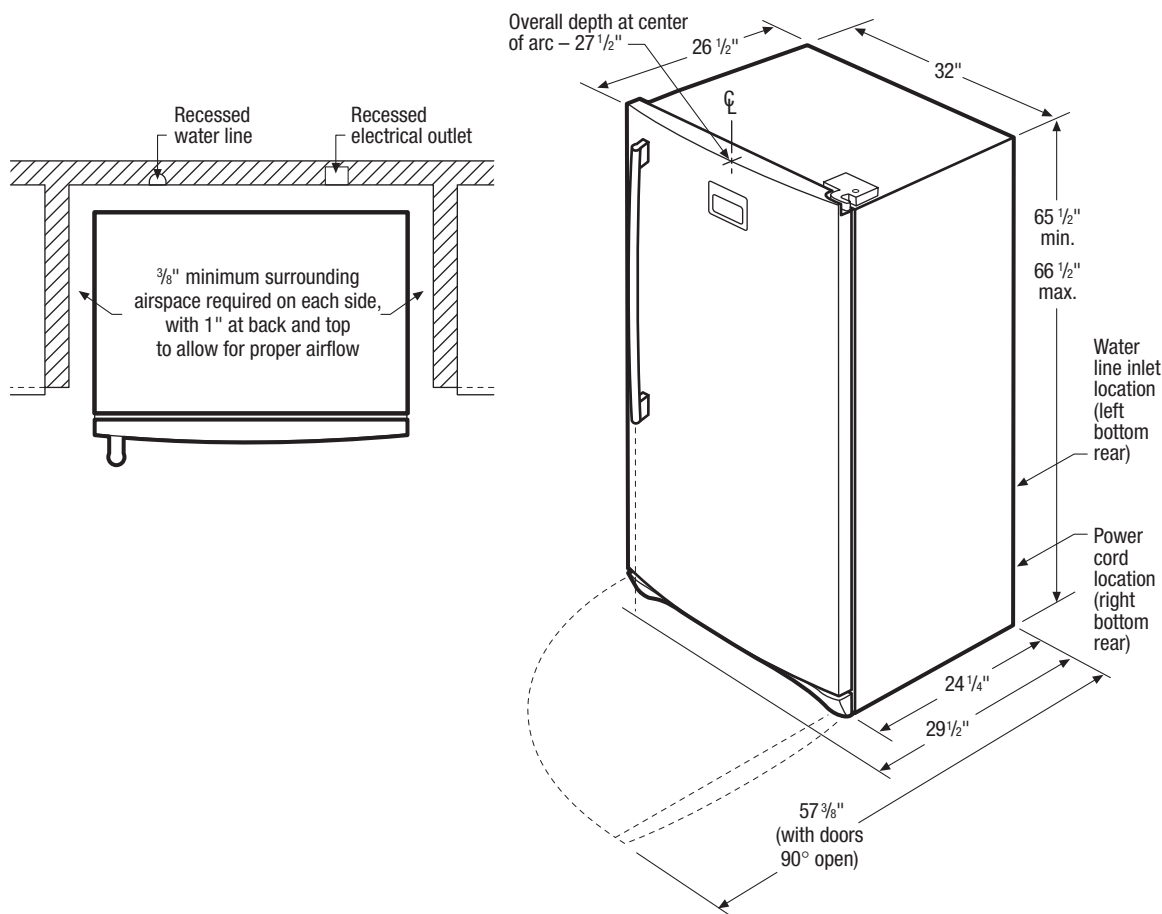

17 Cu. Ft. Upright Freezer Specifications

- Product Weight – 204 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating – 115V/60Hz/15 Amps
- Connected Load (kW Rating) @ 115 Volts = 0.62kW
- Amps @ 115 Volts = 5 Amps
- Always consult local and/or national electric & plumbing codes.
- Water line can enter opening through floor or rear wall. Copper tubing recommended between cold water line and water connection location. Water line tubing recommended is 48" minimum length by 1/4" diameter. Installation of easily accessible shutoff valve in water line required.
- Minimum airspace of 3/8" required on each side, with 1" at back and top to allow for proper airflow.

- When installing next to wall where handle may make contact, allow 4" minimum clearance for 90° door swing. At 90° door stop position, basket access will be maintained but removal will be restricted.
- Locate where surrounding air temperature will not exceed 110°F, to ensure optimum performance. (Temperatures 32°F and below will NOT affect operation.)
- All bottom corners of unit **MUST** rest firmly on solid level surface of hard material, same height as flooring. Surface must be strong and stable enough to support unit when fully loaded.
- Equipped with 4-point leveling to ensure unit is level, which is required in order to function properly.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.