


Dimensions—Double Oven (Professional Series)

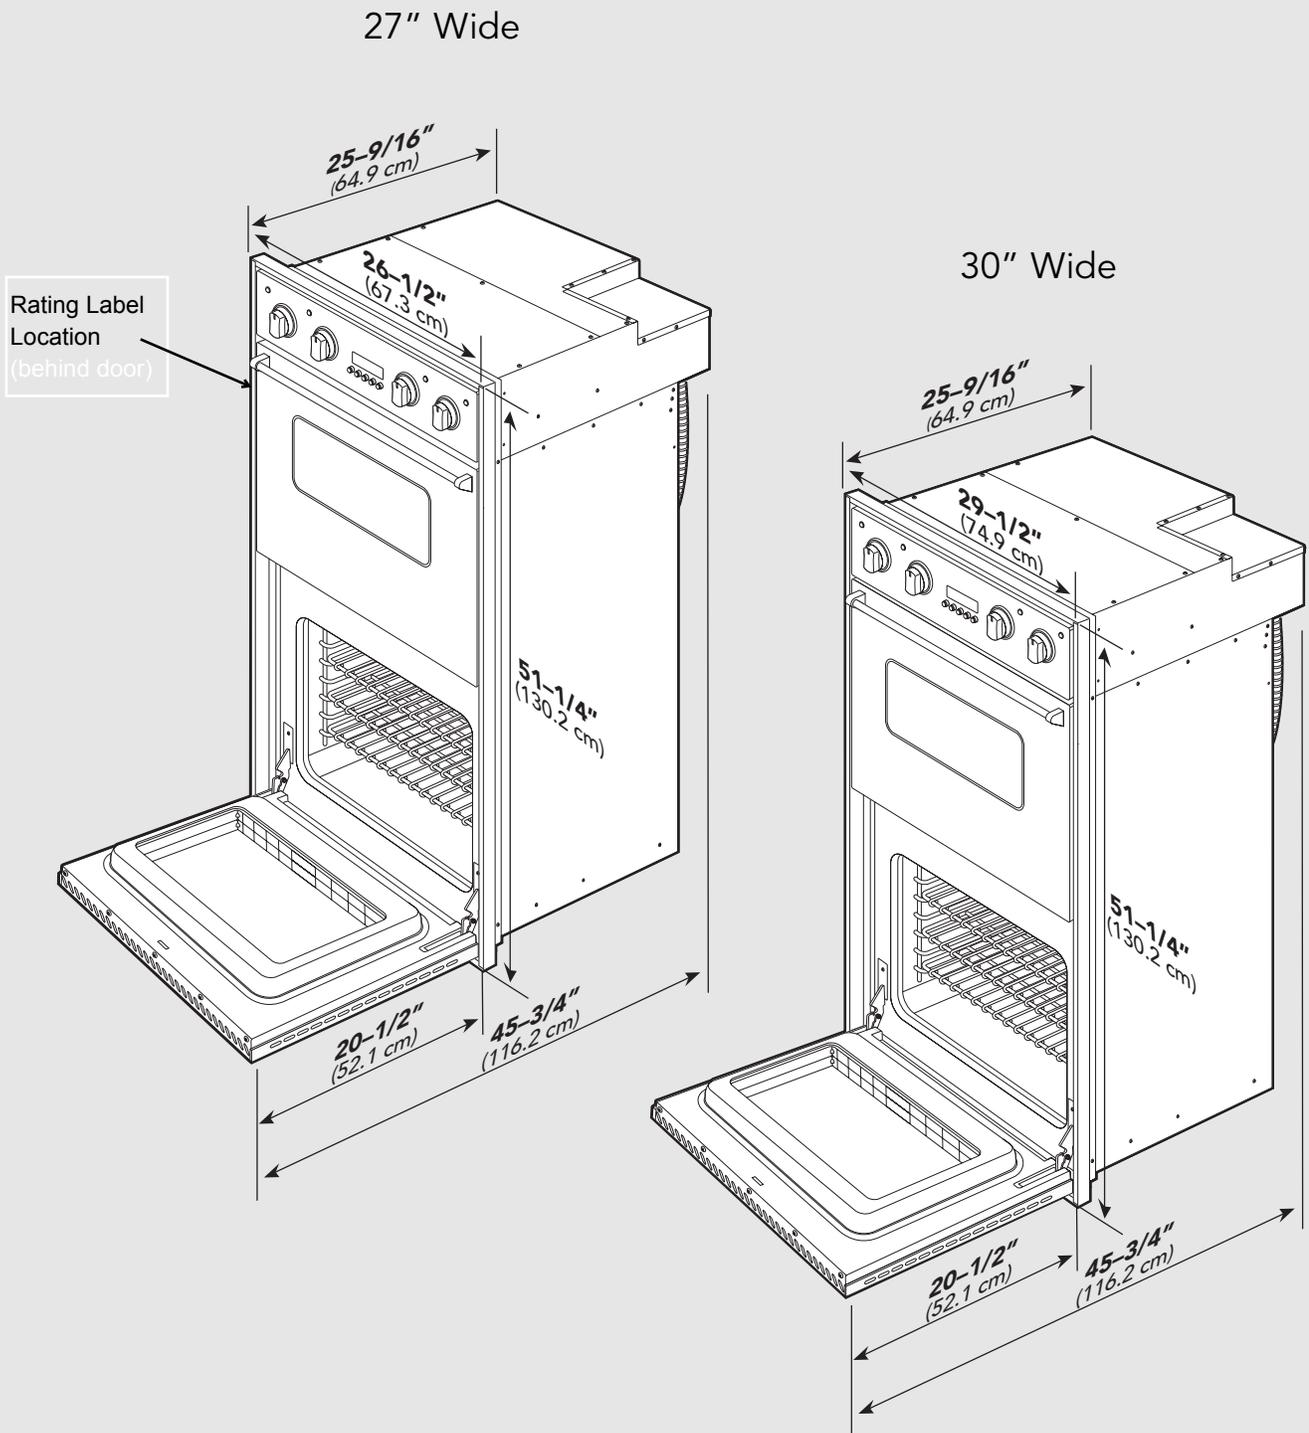


Specifications & Electrical Requirements

Professional Double Oven				
Description	VEDO127/527–27" Wide		VEDO130/530–30" Wide	
Overall Width	26 1/2" (67.3 cm)		29 1/2" (74.9 cm)	
Overall Height	51 1/4" (130.2 cm)			
Overall Depth	to edge of door—25 9/16" (64.9 cm) with door open—45 3/4" (116.2 cm)			
Cutout Width	25 1/2" (64.8 cm)		28 1/2" (72.4 cm)	
Cutout Height	50 5/8" (128.6 cm)			
Cutout Depth	24" (61.0 cm)			
Electrical Requirements	4-wire ground, 240VAC, 50 amp electrical connection Unit is equipped with No.10 ground wire in conduit. Should be fused separately.			
Maximum Usage	40.0 amps—240 VAC 34.7 amps—208 VAC			
Oven Interior Width—both ovens	22 7/16" (57.0 cm)		25 7/16" (64.6 cm)	
Oven Interior Height—both ovens	16 1/2" (41.9 cm)			
Oven Interior Depth—upper oven	16 13/16" (42.7 cm)			
Oven Interior Depth—lower oven	VEDO127 19 1/2" (49.5 cm)	VEDO527 16 13/16" (42.7 cm)	VEDO130 19 1/2" (49.5 cm)	VEDO530 16 13/16" (42.7 cm)
Oven Volume—upper oven (measured to AHAM standard)*	3.6 cu. ft.		4.1 cu. ft.	
Oven Volume—upper oven (total oven cavity)	4.2 cu. ft.		4.8 cu. ft.	
Oven Volume—lower oven (measured to AHAM standard)*	VEDO127 4.0 cu. ft.	VEDO527 3.6 cu. ft.	VEDO130 4.5 cu. ft.	VEDO530 4.1 cu. ft.
Oven Volume—lower oven (total oven cavity)	4.2 cu. ft.		4.8 cu. ft.	
Approximate Shipping Weight	360 lbs. (163 kg)		402 lbs. (182 kg)	

*The AHAM Standard for measuring oven capacity subtracts the door plug and convection baffle dimension from the total oven volume.

Dimensions—Double Oven

(Designer Series—Mechanical and Touch Control Models)

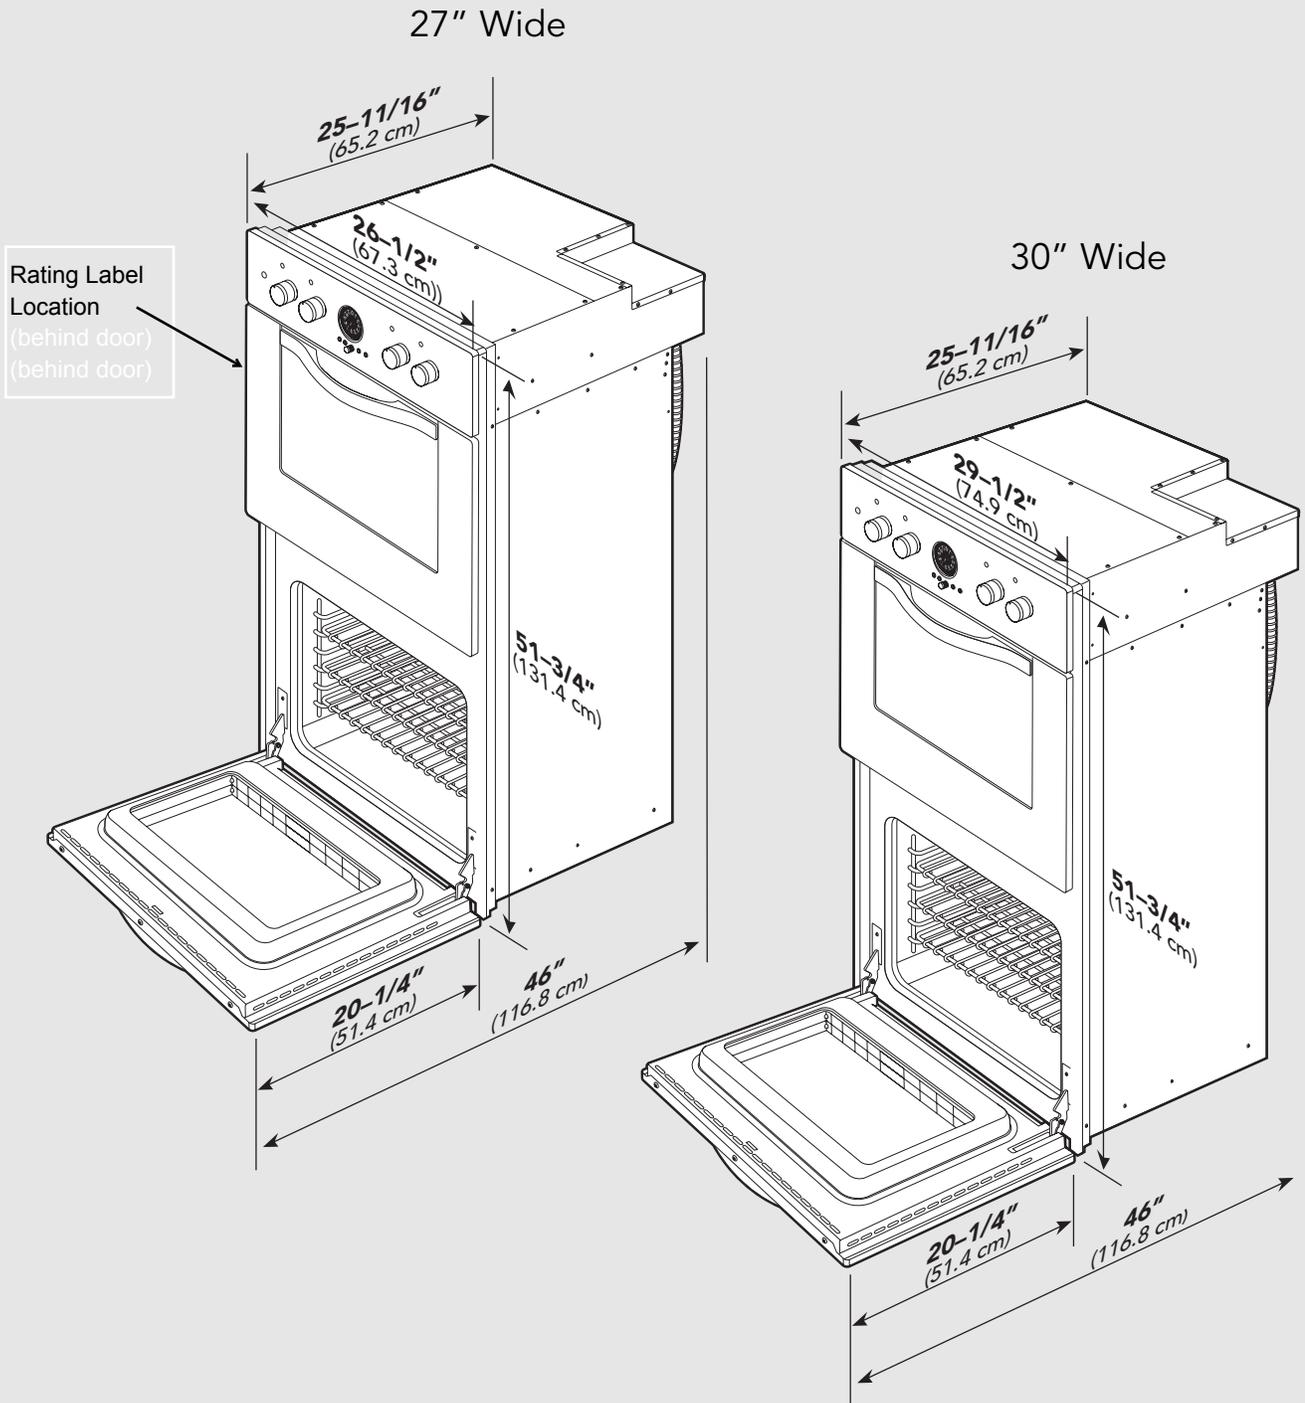


Specifications & Electrical Requirements

Designer Double Oven				
Description	DEDO127(T)/527(T)—27" Wide		DEDO130(T)/530(T)—30" Wide	
Overall Width	26 1/2" (67.3 cm)		29 1/2" (74.9 cm)	
Overall Height	51 3/4" (131.4 cm)			
Overall Depth	to edge of door—25 11/16" (65.2 cm) with door open—46" (116.8 cm)			
Cutout Width	25 1/2" (64.8 cm)		28 1/2" (72.4 cm)	
Cutout Height	50 5/8" (128.6 cm)			
Cutout Depth	24" (61.0 cm)			
Electrical Requirements	4-wire ground, 240VAC, 50 amp electrical connection Unit is equipped with No.10 ground wire in conduit. Should be fused separately.			
Maximum Usage	40.0 amps—240 VAC 34.7 amps—208 VAC			
Oven Interior Width—both ovens	22 7/16" (57.0 cm)		25 7/16" (64.6 cm)	
Oven Interior Height—both ovens	16 1/2" (41.9 cm)			
Oven Interior Depth—upper oven	16 13/16" (42.7 cm)			
Oven Interior Depth—lower oven	DEDO127 19 1/2" (49.5 cm)	DEDO527 16 13/16" (42.7 cm)	DEDO130 19 1/2" (49.5 cm)	DEDO530 16 13/16" (42.7 cm)
Oven Volume—upper oven (measured to AHAM standard)*	3.6 cu. ft.		4.1 cu. ft.	
Oven Volume—upper oven (total oven cavity)	4.2 cu. ft.		4.8 cu. ft.	
Oven Volume—lower oven (measured to AHAM standard)*	DEDO127 4.0 cu. ft.	DEDO527 3.6 cu. ft.	DEDO130 4.5 cu. ft.	DEDO530 4.1 cu. ft.
Oven Volume—lower oven (total oven cavity)	4.2 cu. ft.		4.8 cu. ft.	
Approximate Shipping Weight	360 lbs. (163 kg)		402 lbs. (182 kg)	


*The AHAM Standard for measuring oven capacity subtracts the door plug and convection baffle dimension from the total oven volume.

Cutout Dimensions—Double Oven (Professional Series)

27" Wide Built-In

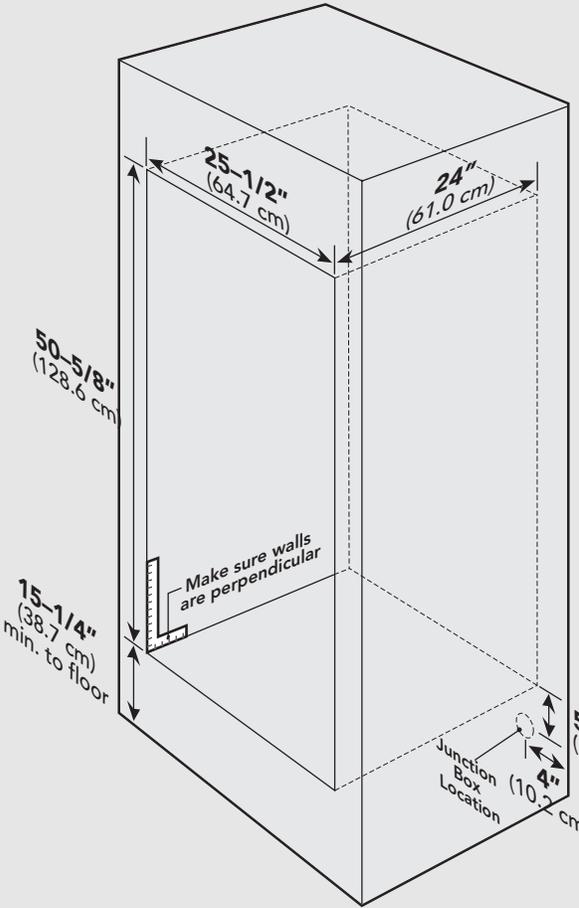


30" Wide Built-In

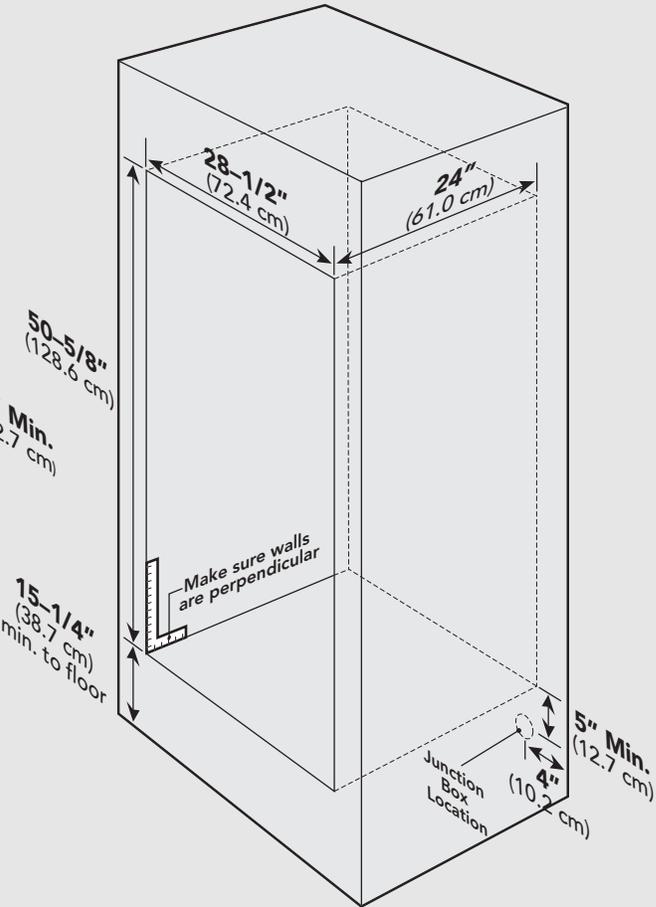

Cutout Dimensions—Double Oven

(Designer Series—Mechanical and Touch Control Models)

27" Wide Built-In

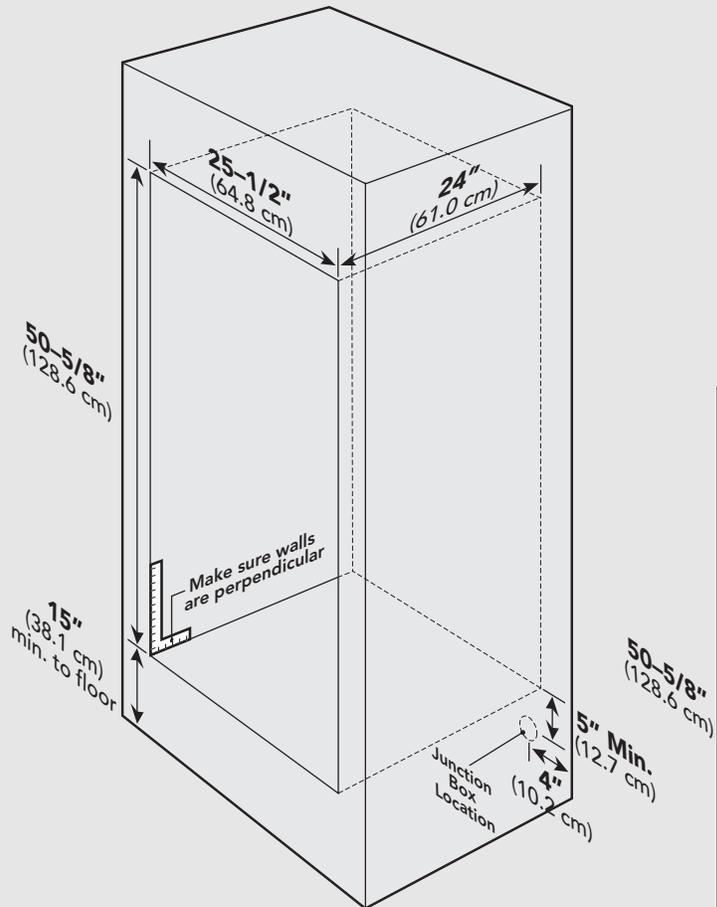

30" Wide Built-In

