



Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

GX5FHDGXV GX5SHDXV
GX5FHTXV GX5SHTXV


Electrical: A 115 Volt, 60 Hz., AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of approximately 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

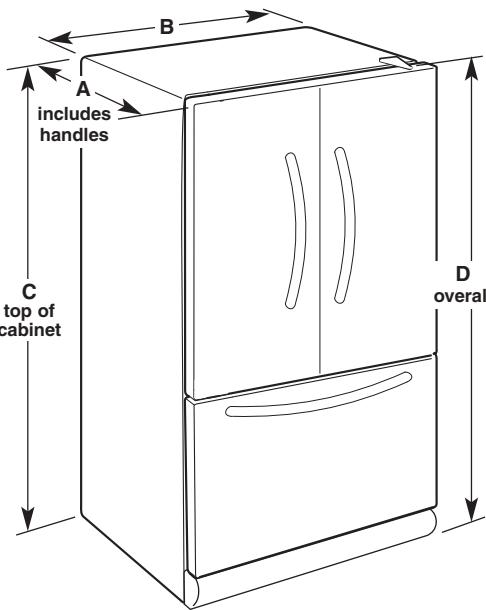

Model #	Depth with Handles "A"	Cab. Width "B"	Cab. Height "C"	Overall Height "D"
GX5FHDGXV	35-1/2" (90.17 cm)	35-5/8" (90.49 cm)	68-1/2" (174 cm)	69-7/8" (177.48 cm)
GX5FHTXV	35-1/2" (90.17 cm)	35-5/8" (90.49 cm)	68-1/2" (174 cm)	69-7/8" (177.48 cm)
GX5SHDXV	35-1/2" (90.17 cm)	35-5/8" (90.49 cm)	68-1/2" (174 cm)	69-7/8" (177.48 cm)
GX5SHTXV	35-1/2" (90.17 cm)	35-5/8" (90.49 cm)	68-1/2" (174 cm)	69-7/8" (177.48 cm)

LOCATION REQUIREMENTS

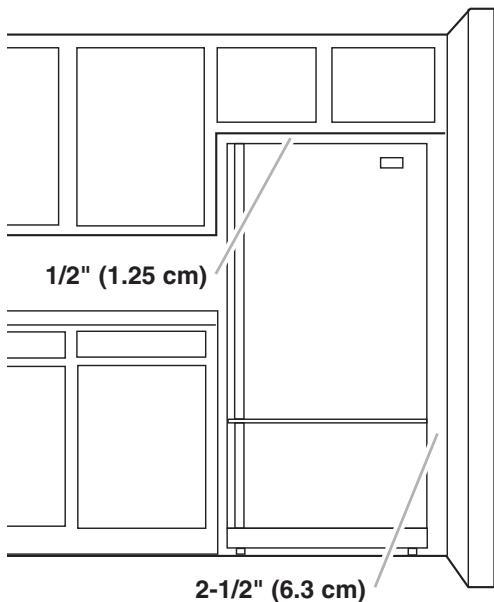

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) space at the top and behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water connections. When installing your refrigerator next to a fixed wall, leave 2-1/2" (6.3 cm) minimum on each side (some models require more) to allow for the door to swing open.

NOTE: It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source. Do not install the refrigerator in a location where the temperature will fall below 55°F (13°C).