




### Remote Flat Roof Blower

Serves the same purpose as a remote blower, but constructed differently for proper water drainage. 1000 & 1600CFM Available.



### In-Line Blower

In-Line models offer a viable solution when a remote blower system is desired but impractical for aesthetic reasons. 600, 1000, 1200, and 1600 CFM Available.



### Remote Blower

Can be placed on a pitched roof or outside wall. 1000, 1200, 1600, 2000, and 2500 CFM Available.



### Wall Switch Kit

Provides Remote Switching option allowing a more comfortable reach when adjusting fan speed and light intensity

## Available Models

### In-Line Blowers

IL600 - 600CFM, 6" Round Duct  
IL1000 - 1000CFM, 8" Round Duct  
IL1200 - 1200CFM, 10" Round Duct  
IL1600 - 1600CFM, 10" Round Duct

### Remote/Exterior Mount Blowers


RB1000 - 1000CFM, 8" Round Duct  
RB1200 - 1200CFM, 10" Round Duct  
RB1600 - 1600CFM, 10" Round Duct  
RB2000 - 2000CFM, 12" Round Duct  
RB2500 - 2500CFM, 12" Round Duct

### Flat Roof Blowers

FRB1000 - 1000CFM, 8" Round Duct  
FRB1600 - 1600CFM, 10" Round Duct


### Wall Switch Kit

UIBWSK - Wall Switch Kit for Light/Fan

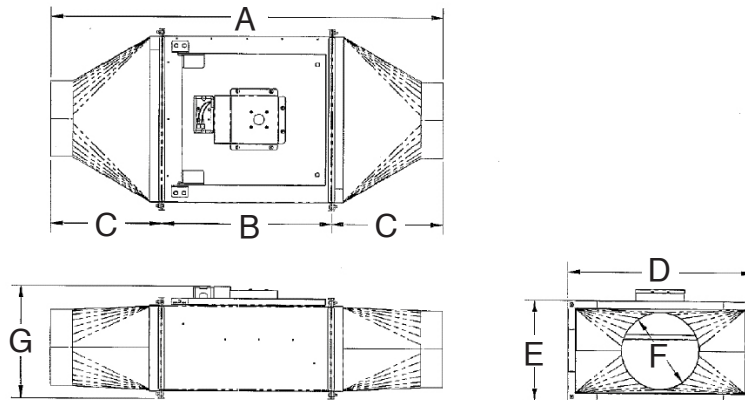

Inline Blowers

	A	B	C	D	E	F	G	Run Amp
IL600	36 3/4	15 5/8	10	15 3/4	9	6	11	1.2
IL1000	38 3/4	17 5/8	10 1/2	19	10 1/2	8	12	3
IL1200	42 3/4	21	11	21	11 1/2	10	13	4
IL1600	42 3/4	21	11	21	11 1/2	10	13	4

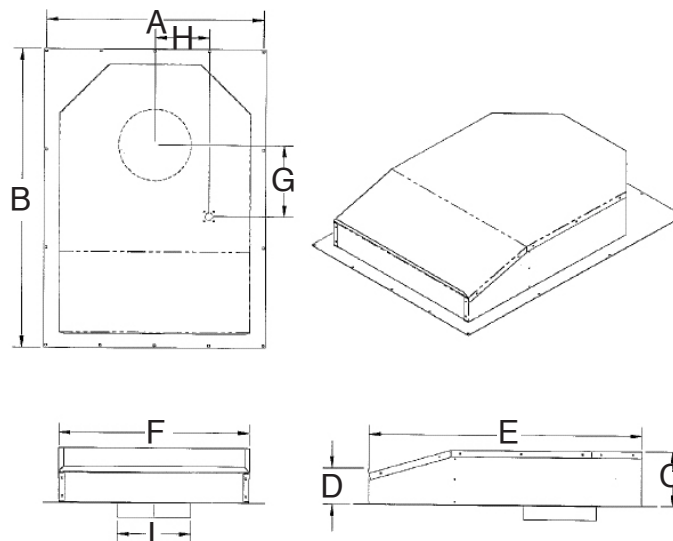

Remote Blowers

	A	B	C	D	E	F	G	H	I	Run Amp
RB1000	24	33.5	6	4	30	21	8	3	8	3
RB1200	24	33.5	10	8	30	21	9	3	10	4
RB1600	24	33.5	10	8	30	21	9	3	10	4
RB2000	27	33.5	12	10	30	24	10	7	12	5
RB2500	27	33.5	12	10	30	24	10	7	12	6.5

**\*All units require 115 volt 15 amp circuit\***