


PROXIMITY TO SIDE CABINET INSTALLATION (24" W. MODELS)

1. This range may be installed directly adjacent to existing 36" (91.4 cm) high base cabinets. **IMPORTANT:** The top grate support **MUST** be 3/8" (.95 cm) above the adjacent base cabinet countertop. This may be accomplished by raising the unit using the adjustment spindles on the legs.
2. The range **CANNOT** be installed directly adjacent to sidewalls, tall cabinets, tall appliances, or other side vertical surfaces above 36" (91.4 cm) high. There must be a minimum of 6" (15.2 cm) side clearance for the 4-Burner and Griddle model ranges and a minimum of 9" (22.9 cm) side clearance for the Char-Grill model to such combustible surfaces above the 36" (91.4 cm) counter height.
3. Within the side clearance to combustible vertical surfaces above 36" (91.4 cm), the maximum wall cabinet depth must be 13" (33.0 cm) and wall cabinets within this side clearance must be 18" (45.7 cm) above the 36" (91.4 cm) high countertop.
4. Wall cabinets above the range must be a minimum of 42" (106.7 cm) above the range cooking surface for the full width of the range. This minimum requirement does not apply if a rangehood is installed over the cooking surface.

A	
4B Model	6" (15.2 cm)
G Model	6" (15.2 cm)
K Model	6" (15.2 cm)
Q Model	9" (22.9 cm)

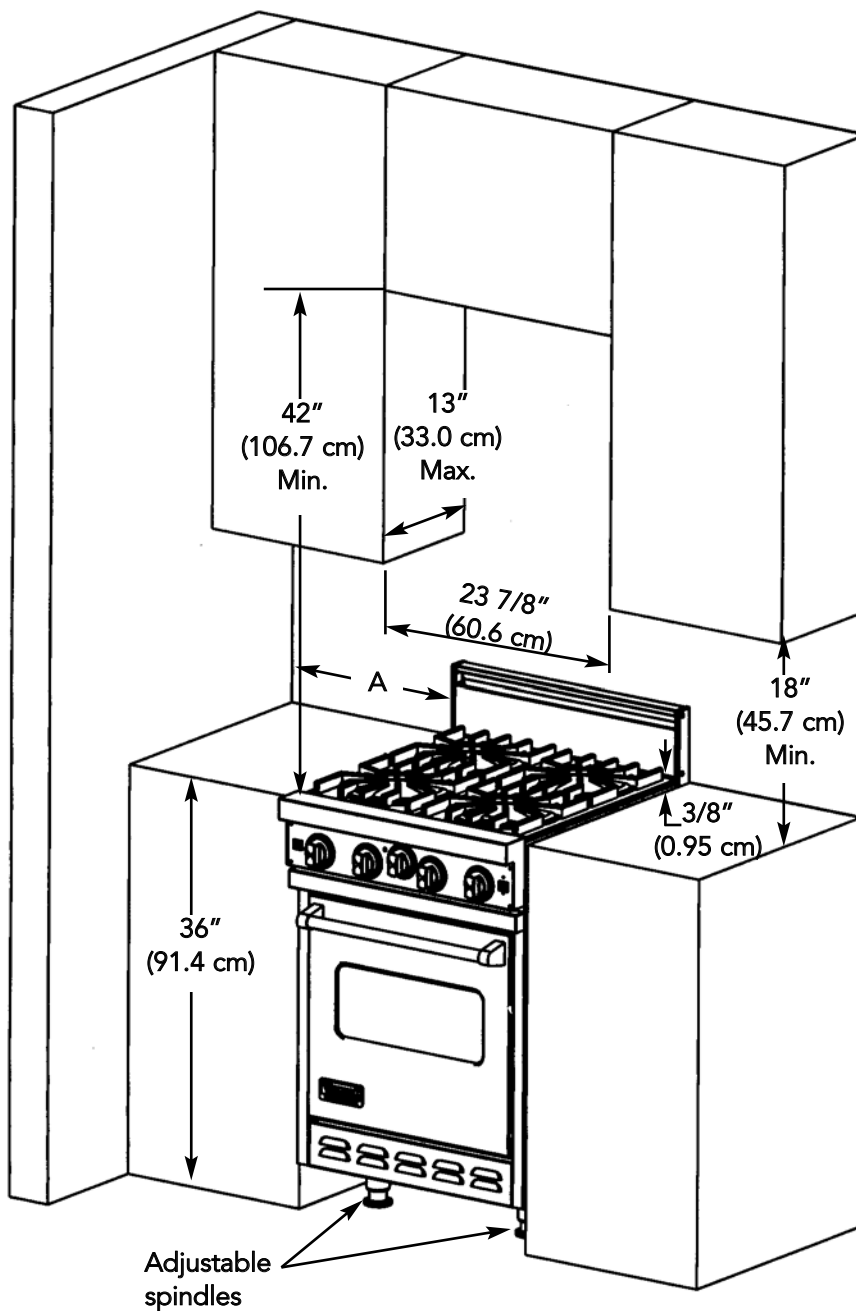

BASIC SPECIFICATIONS

Description	24" W. Models
Overall width	23 7/8" (60.6 cm)
Overall height	<p><u>Base Height</u> To top of grate support - Min. 35 7/8" (91.1 cm) to Max. 37 5/8" (95.6 cm) Legs adjust 1 3/4" (4.5 cm)</p> <p><u>Additions to Base Height</u> To top of grate - add 1 1/8" (2.9 cm) To top of island trim - add 1 1/4" (3.2 cm) To top of 6" backguard - add 6" (15.2 cm) To top of high shelf - add 23 1/2" (59.7 cm)</p>
Overall depth from rear	To end of side panel - 24 5/16" (61.8 cm) To end of control panel - 26 1/4" (66.7 cm) To end of knobs - 27 3/4" (70.5 cm)
Electrical requirements	120 VAC/60 Hz; 4 ft. (121.9 cm), 3-prong plug attached to the unit.
Gas requirements	Shipped natural gas standard; convert to LP/Propane with standard convertible regulator; accepts standard residential 1/2" ID gas service line
Maximum amp usage	4B 4.3 amps G 11.5 amps Q 4.3 amps K 4.3 amps
Surface burner rating (if applicable)	15,000 BTU Nat./13,500 BTU LP (4.4 kW/4.0 kW)
Griddle burner rating (if applicable)	Two 15,000 BTU ea. Nat./13,500 BTU ea. LP (4.4 kW/4.0 kW)
Grill burner rating (if applicable)	Two 18,000 BTU ea. Nat./16,000 BTU ea. LP (5.3 kW/4.7 kW)
Wok burner rating	27,500 BTU Nat./LP (8.1 kW)
Broil rating	15,000 BTU Nat./13,500 BTU LP (4.4 kW/4.0 kW)
Bake rating	30,000 BTU Nat./LP (8.8 kW)
Oven Interior width	18" (45.7 cm)
Oven Interior height	16 1/8" (41.0 cm)
Oven Interior depth	17 5/8" (44.8 cm)
Oven Interior overall size	3.0 cu. ft.
Approximate Shipping wt.	395 lbs. (177.8 kg)

Minimum clearances from adjacent combustible construction

- Cooking surface and below (36" [91.4 cm] and below)
 - Sides - 0"
 - Rear - 0" with backguard or high shelf; 0" with island trim and non-combustible rear wall; 6" (15.2 cm) with island trim and combustible rear wall.
 - Top grate support - 36" (91.4 cm)
- Above cooking surface (above 42" [91.4 cm])
 - Sides - Models 4B, G, K - 6" (15.2 cm); Model Q - 9" (22.9 cm)
 - Within 6" (15.2 cm) side clearance, wall cabinets no deeper than 13" (33.0 cm) must be minimum 18" (45.7 cm) above cooking surface.
 - Wall cabinets directly above product must be minimum 42" (106.7 cm) above cooking surface
- Use range only with factory supplied legs.