### Dimensions

## 30" Professional Integrated 3-19/32"-(9.1 cm) 36" Professional Integrated **9-5/32"** (23.3 cm) 36" (91.5 cm) 3-19/32" (9.1 cm)) **9-5/32"** (23.3 cm) 82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max. 75-15/16" (192.9 cm) **26-1/2"**(67.3 cm) 82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max. 75-15/16" (192.9 cm)

6

### Specifications

30" Professional Integrated			
Description	VIFB304	VIRB304	
Overall width	30" (76.2 cm)		
Overall height from bottom	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.		
Overall depth from rear	To front edge of side trim:	23-3/8" (59.4 cm)	
	To front of top grille:	24" (61.0 cm)	
	To front of handle endcap:	26-1/2" (67.3 cm)	
Cutout width	30" (74.9 cm)		
Cutout height	82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max.		
Cutout depth	24" (61.0 cm) min.		
Electrical requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with		
	grounded 3-prong plug attached to product		
Maximum amp usage	9.1 amps	5.7 amps	
Inlet water requirements	1/4" copper tubing inlet		
	waterline; minimum 20 psi;	N/A	
	maximum 120 psi		
Overall interior dimensions			
Total capacity	15.9 cu. ft. (450 liters)	18.2 cu. ft. (516 liters)	
Approximate shipping weight	530 lbs. (238.5 kg)	505 lbs. (227.3 kg)	

36" Professional Integrated			
Description	VIFB364	VIRB364	
Overall width	36" (91.5 cm)		
Overall height from bottom	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.		
Overall depth from rear	To front edge of side trim:	23-3/8" (59.4 cm)	
	To front of top grille:	24" (61.0 cm)	
	To front of handle endcap:	26-1/2" (67.3 cm)	
Cutout width	36" (91.4 cm)		
Cutout height	82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max.		
Cutout depth	24" (61.0 cm) min.		
Electrical requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with		
	grounded 3-prong plug attached to product		
Maximum amp usage	9.5 amps	6.5 amps	
Inlet water requirements	1/4" copper tubing inlet		
	waterline; minimum 20 psi;	N/A	
	maximum 120 psi		
Overall interior dimensions			
Total capacity	19.1 cu. ft. (541 liters)	22.8 cu. ft. (646 liters)	
Approximate shipping weight	585 lbs. (263.3 kg)	570 lbs. (256.5 kg)	

7


#### **Cutout Dimensions**

# 30" Professional & Professional Integrated **24"** (61.0 cm) See Anti-Tip board installation Electric Outlet Location (15.2 cm) 9" (22.9 cm) (22.9 cm) 82-7/8" (210.5 cm) min. anti-tip board & opening height 213.5 cm) min. anti-tip board & opening height **73-3/8"** (186.4 cm) Water Line Entry Area Note: Shown for All Freezer Only Professional Integrated Models Only

8

### Anti-Tip Dimensions

30" Professional & Professional Integrated

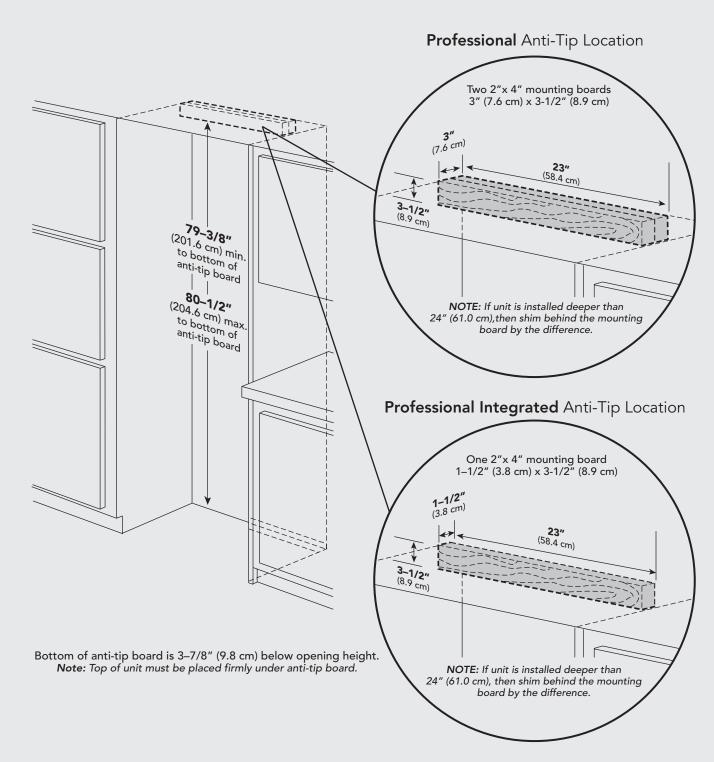


9

#### **Cutout Dimensions**

# 36" Professional & Professional Integrated **24"** (61.0 cm) See Anti-Tip board installation Electric Outlet Location (22.9 cm) 82-7/8" (210.5 cm) min. anti-tip board & opening height 84-1/16" (213.5 cm) min. anti-tip board & opening height **73-3/8"** (186.4 cm) Water Line Entry Area Note: Shown for All Freezer Only Professional Integrated Models Only

### Anti-Tip Dimensions

36" Professional & Professional Integrated

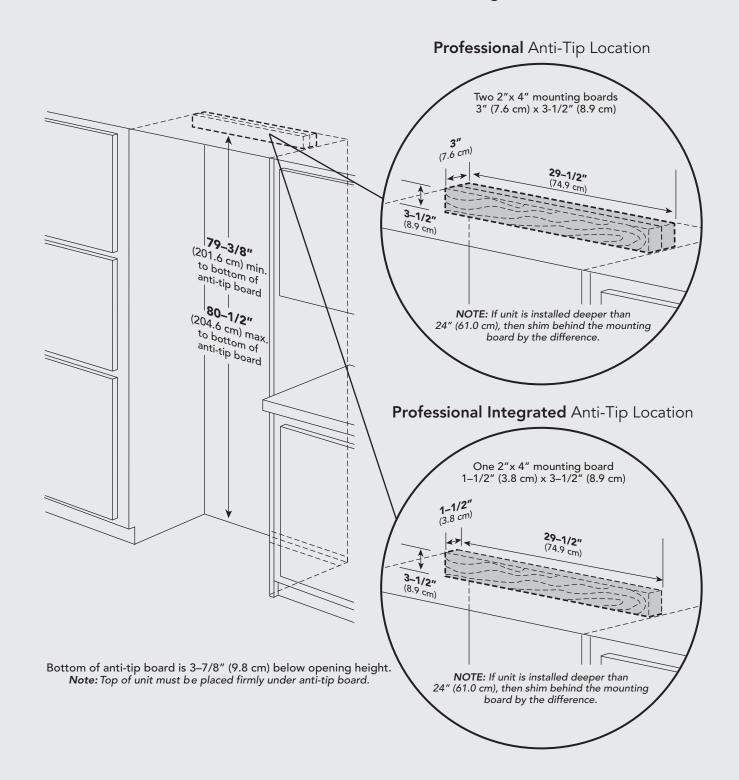

10