PRODUCT MODEL NUMBERS

KSSC36FT	KSSO36FT	KSSP48QT
KSSC36QT	KSSO36QT	KSSS36FT
KSSC42FT	KSSO42FT	KSSS42FT
KSSC42QT	KSSO42QT	KSSS48QT
KSSC48FT	KSSO48FT	
KSSC48QT	KSSO48QT	


Electrical: A 115 Volt, 60 Hz., AC only 15- or 20amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Supply: A cold water supply with water pressure of between 30 and 120 psi (207 - 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 - 414 kPa).

Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F.


CABINET OPENING DIMENSIONS

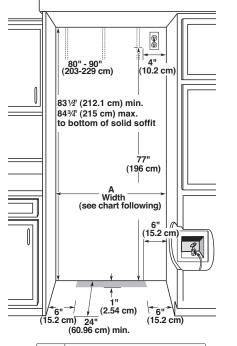

Model	Width A (as shown above)	
36	351/2" (90.2 cm) to 353/4" (90.8 cm)	
42	411/2" (105.4 cm) to 413/4" (106.1 cm)	
48	471/2" (120.7 cm) to 473/4" (121.3 cm)	

NOTE: Flooring under refrigerator must be at same level as the room. Face of cabinetry must be plumb.

OVERALL DIMENSIONS



Width A

Model


36 42

48


■ Height dimensions are shown with the	
leveling legs extended to 1/8" (3 mm)	
below the rollers.	

- The power cord is 84" (213 cm) long.
- The water line attached to the back of the refrigerator is 5' (1.5 m) long.

FRONT VIEW

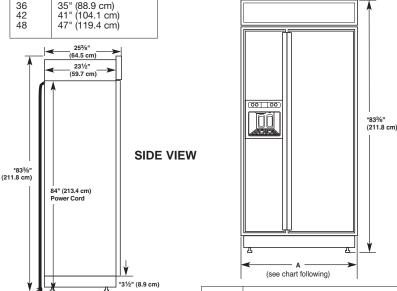

When leveling legs are fully extended to 11/4" (3.2 cm) below rollers, add 11/8" (2.9 cm) to the height dimensions.



DOOR SWING DIMENSIONS

