KitchenAid Side by Side Refrigerator

PRODUCT MODEL NUMBERS

KSSC36FT	KSSO36QT	KSSP48QT
KSSC36QT	KSSO42FT	KSSS36FT
KSSC42FT	KSSO42QT	KSSS42FT
KSSC42QT	KSSO48FT	KSSS48FT
KSSC48FT	KSSO48QT	KSSS36QT
KSSC48QT	KSSP36QT	KSSS42QT
KSSO36FT	KSSP42QT	KSSS48QT


Electrical: A 115 Volt, 60 Hz., AC only 15- or 20amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Supply: A cold water supply with water pressure of between 30 and 120 psi (207 - 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 - 414 kPa).

Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F.

CABINET OPENING DIMENSIONS

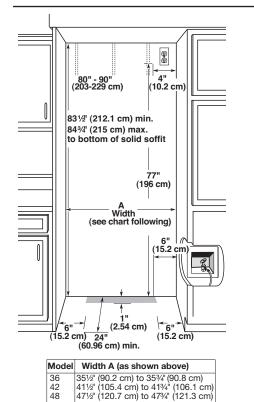


NOTE:Flooring under refrigerator must be at same level as the room. Face of cabinetry must be plumb.


OVERALL DIMENSIONS

Width A

Model




25%"	■ Height dimensions are shown with the leveling legs extended to 1/8" (3 mm) below the rollers.
(64.5 cm)	■ The power cord is 84" (213 cm) long.
	■ The water line attached to the back of

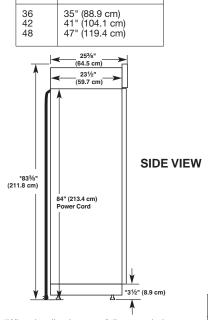

*When leveling legs are fully extended to $1^{1/4}$ " (3.2 cm) below rollers, add $1^{1/6}$ " (2.9 cm) to the height dimensions.

FRONT VIEW

the refrigerator is 5' (1.5 m) long.

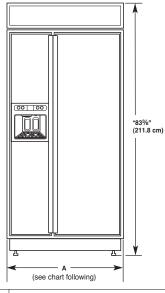

Model	Width A (Trim edge to trim edge)
36	36¼" (92.1 cm)
42	42¼" (107.3 cm)
48	48¼" (122.6 cm)

DOOR SWING DIMENSIONS

