

# Side-by-Side Refrigerators

EW26SS70H S, EW26SS70H W, EW26SS70H B

Featuring Wave-Touch™ Electronic Controls



### Perfect Temp™ Drawer

Offers flexibility in temperature from 28° to 42° F, 9 preset selections including sparkling wine, cheese, shellfish, marinate and thaw plus three “My Favorites” which are customizable. Provides the assurance food of any kind is properly refrigerated at the ideal temperature for storing or serving.



### Luxury-Design™ Glass Shelves

All-glass shelves are crafted for exceptional beauty and feature the Luxury-Glide™ rack system that extends smoothly.



### Luxury-Design™ Lighting

Our ramp-up designer lighting is as beautiful as it is functional.



### PureAdvantage® Filtration Systems

PureAdvantage® Air Filter keeps clean, filtered air circulated throughout to prevent odor transfer.

PureAdvantage® Water Filter ensures fresh, clean water and ice at your fingertips.

Combination Replacement Filters Kit – PN# EAFWF01

## 26 CU. FT. SIDE-BY-SIDE REFRIGERATORS

### Capacities

Total Capacity	25.93 Cu. Ft.
Fresh Food Volume	16.48 Cu. Ft.
Freezer Volume	9.45 Cu. Ft.
Total Shelf Area	25.82 Sq. Ft.
Fresh Food Shelf Area	18.36 Sq. Ft.
Freezer Shelf Area	7.46 Sq. Ft.

### Exterior

Signature Soft-Arc Door and Handle Design	Yes
Wave-Touch™ Electronic Controls	Yes
Door Hinge Covers	Yes
Ice/Water Dispenser	Yes
Perfect Set™ Temperature Control System and Display	Yes
Crushed/Cubes/Water	Yes
Air and Water Filter Indicator/Reset	Yes
Fast Ice™	Yes
Fast Freeze™	Yes
Lock	Yes
Dispenser Light Control	Yes

### Fresh Food Conveniences

PureAdvantage® Water & Ice / Air Filtration	Yes
Water Filter Location	Right Rear
Temp Alarm System / Door Ajar Alarm / Power Failure Alarm	Yes
Luxury-Design™ Full-Extension Glass Shelves	3
Luxury-Glide™ Dual Humidity-Controlled Upper Crisper	Yes
Luxury-Glide™ Humidity-Controlled Lower Crisper	Yes
Chill Zone™ Drawer	
Perfect Temp™ Drawer	Yes
Wine Rack	Yes
Clear 1-Gallon Removable Door Bins	3
Clear 2-Liter Adjustable Door Bins	2
Dairy Compartment with Clear Cover	Yes
Tall Bottle Retainers	3
Luxury-Design™ Ramp-Up Multilevel Lighting	Yes

### Freezer Conveniences

Automatic Ice Maker with Ice Server	Yes
Glass Shelves	2
Sliding Full Freezer Baskets	2 Luxury-Glide™
Sliding Half Freezer Baskets	1
Clear Fixed Door Bins	1
Tilt-Out Wire Door Racks	3
Ice Cream Shelf	Yes
Pizza Shelf	Yes
Luxury-Design™ Ramp-Up Multilevel Lighting	Yes

### Additional Features

ENERGY STAR®	Yes
Sabbath Mode (Star-K® Certified)	Yes
A.D.A. Compliant*	Yes

### Specifications


Color –	
Stainless Steel	S
White	W
Black	B
Overall Exterior Dimensions –	
Height (with Hinges and 3/8" Rollers)	69-1/2"
Width	35-5/8"
Depth (to Center of Arc) (with 90° Door Open)	33" 49-7/8"
Power Supply Connection Location	Right Bottom Rear
Water Inlet Location	Left Bottom Rear
Voltage Rating	120V/60Hz/15 or 20A
Connected Load (kW Rating) @ 120 Volts†	1.02
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	335 Lbs.

\*When properly installed, meets the appliance standards in the American with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004.

†An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at [electroluxappliances.com](http://electroluxappliances.com).

Specifications subject to change.

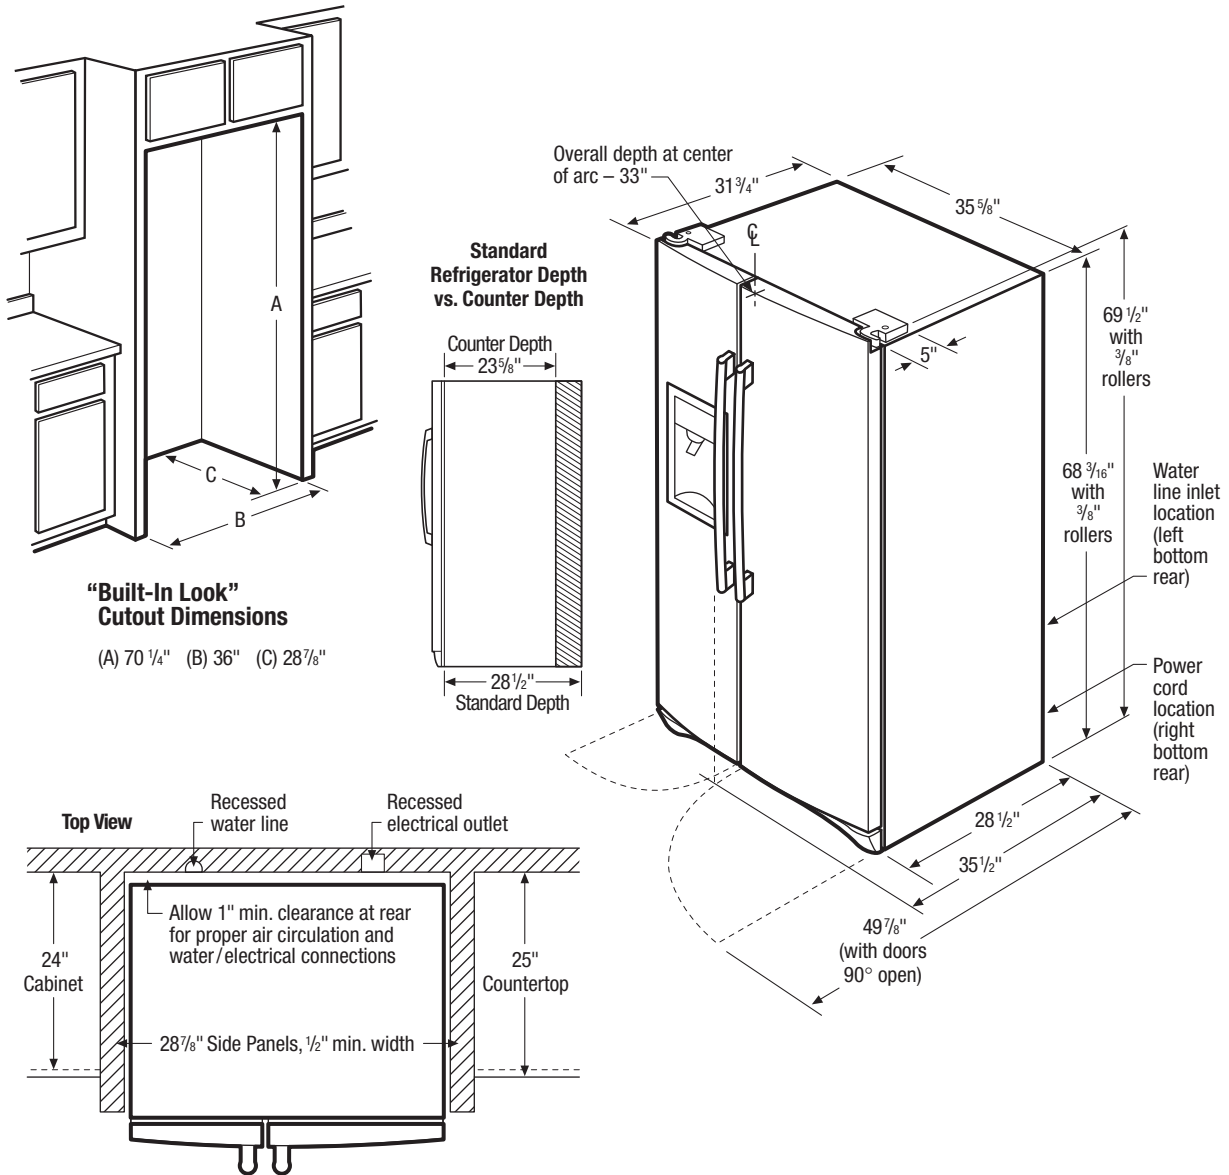

## Side-by-Side Refrigerator Specifications

- Product Weight – 325 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating – 120V/60 Hz/ 15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and/or national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (*Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.*)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure – Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

## "Built-In Look" Specifications

- Minimum opening of 70-1/4"H x 36"W x 28-7/8"D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

**Note: For planning purposes only. Refer to Product Installation Guide on the web at [electroluxappliances.com](http://electroluxappliances.com) for detailed instructions.**