

Model UC-24B Undercounter Beverage Center

Sub-Zero Undercounter units simplify life at home by bringing refrigeration anywhere it's needed. Fresh greens in the kitchen island. Soda and snacks in the media room. Chilled mineral water in the master suite. The Model UC-24B beverage center has a full-view glass door and is available in the overlay or classic stainless steel design. It also features two wine storage shelves that will hold 16 (750 ml) bottles.



Features

- Overlay or stainless steel design application with glass door (standard)
- Full-view glass door and interior accent lighting matches appearance of Wine Storage Model 424
- Easy-access electronic controls with LCD display
- Roller-glide wine storage shelves with 16 (750 ml) bottle capacity
- Adjustable, spill-proof cantilever glass shelves and spill-proof glass floor
- Clear utility bin for storage of smaller items
- Optional door lock available as sales accessory
- Meets strict Department of Energy requirements

This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.





Clear Utility Bin

Wine Storage Shelves



Note: High altitude glass is for installations at or above 5,000'.

Interior Features

- Beverage Center
 - 2 Wine Storage Shelves Adjustable Glass Shelf Clear Utility Bin Full-View Glass Door

Accessories

- Classic stainless steel tubular handle for overlay application
- Polished chrome handle for overlay application
- UL approved door lock kit


Accessories are available through your Sub-Zero dealer. To obtain local dealer information, visit the Locator section of our website, subzero.com.



Overall Dimensions



Model UC-24B Undercounter Beverage Center

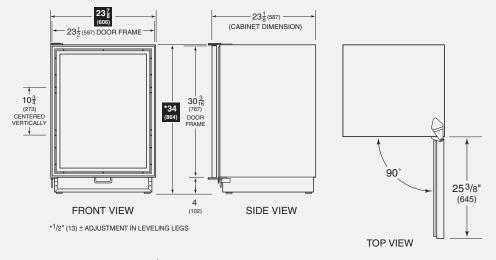


Unit dimensions may vary by $\pm 1/8$ ".

Specificat	ions
------------	------

Overall Width	23 ⁷ /8"	
Overall Height	34"	
Overall Depth	24"	
Door Clearance	25 ³ /8"	
Refrigerator Capacity	5.7 cu ft	
Opening Width	24"	
Opening Height	341/2"	
Opening Depth	24"	
Electrical Requirements 15	115 V AC, 60 Hz amp dedicated circuit	
Annual Energy Usage	\$39*	
Shipping Weight Stai	Overlay – 130 lbs inless Steel – 135 lbs	
*Based on 9.06 cents per kilowatt hour.		

Installation Specifications

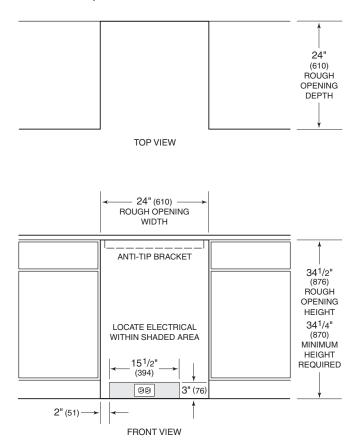

Installation Notes

Undercounter Model UC-24B is available in your choice of the overlay or classic stainless steel design application. A high altitude glass door unit may be special ordered for installations at or above 5,000'.

Complete installation specifications, including panel sizes, can be found on our website, subzero.com.

Dimensions in parentheses are in millimeters unless otherwise specified.