

Undercounter/Freestanding 24"W. Dual Zone

REFRIGERATION ng 24"W. Dual Zone Wine Cellar

Standard Features & Accessories

All models include:

- Hidden touchpad electronic controls with digital temperature readout
- $\circ\,$ Inside temperature can be adjusted from 40 65°F in each compartment
- TruProtect[™] system signals if door is left open or if temperature is out of set range
- Sabbath mode disables audible tones, LED display and lights
- Temperature can be displayed in either Fahrenheit or Celsius
- Capacity—44 bottles
- Six wire shelves cradle bottles horizontally to keep corks moist

- o Shelves are coated to reduce vibration and hold bottles snugly in place
- o Roller rack shelves glide in and out for easy access to stored bottles
- o Shelves can be removed to store magnum or larger bottles
- Ultraviolet-resistant tempered glass and black interior protects wine from harmful light
- Maple wood facings provide additional ultraviolet protection
- Low-intensity lighting displays wine with minimal heat and light output
- Interior light turns on by switch or when door is opened

- Keyed door lock provides protection for stored wines
- Low-E argon-filled glass doors
- Install as undercounter or freestanding unit
- Must be ordered right or left hinge. (As you face unit, RIGHT has hinge on right side and handle on left side; LEFT has hinge on left side and handle on right side.)

Model Options



VUWC244 Professional

FINISH DETAILS FOR VUWC MODEL

- Clear and fluted glass doors

 Stainless Steel (SS)—stainless steel
 frame around large window door,
 stainless steel handle with chrome plated brackets, black exterior
 cabinet, and black interior.
- Solid door
 - o Stainless Steel (SS)
- o Finish codes designate door front. Stainless steel handle with chromeplated brackets, black exterior cabinet, and black interior.



DFUW244 Custom Front

FINISH DETAILS FOR DFUW MODEL

- Clear and fluted glass doors
- Handle not included—opt for custom handle, or purchase a Viking Professional Series or Designer Series handle kit (see Installation Notes & Accessories).
- Accept 3/4"-thick custom wood frame
- See Custom Panels section for more information and additional specifications.

ORDERING INSTRUCTIONS

First specify model number, then specify door style ("F" for fluted, "C" for clear or "D" for solid) immediately after model number (VUWC244**F**). Next, specify hinge preference ("R" for right or "L" for left), and then color code (VUWC244F**RSS**).





Undercounter/Freestanding 24"W. Dual Zone



Wine Cellar **Dimensions & Specifications** Please see Installation Notes & **PRODUCT DIMENSIONS** Accessories for important information, including handle kits. VUWC244 DFUW244 Professional **Custom Front** See Custom Panels section for more information and additional specifications. 3.7/8" 23.7/8" (60.6 cm) **30.3/4**" (78.1 cm) 30.3/4" (78.1 cm) _ст) cW) mir **21.1/2**" (54.6 cm) **21-1/2'** (54.6 cm) 23-7/8" **23-7/8**" (60.7 cm) **26-3/8**" (67.0 cm) PROFESSIONAL **CUSTOM FRONT**

	VUWC244		DFUW244
Overall width		23-7/8" (60.6 cm)	
Overall height (from bottom)		34" min. (86.4 cm) to 34-3/4" (88.3 cm) max.	
Overall depth (from rear)			
To front of handle	26-3/8" (67.0 cm)		Varies
With door open		46-1/2" (118.1 cm)	
Approx. ship. weight		180 lbs. (81.0 kg)	





REFRIGERATION Undercounter/Freestanding 24"W. Dual Zone Wine Cellar

Dimensions & Specifications

DOOR SWING




VUWC244 Professional



DFUW244 Custom Front

See **Custom Panels** section for more information and additional specifications.

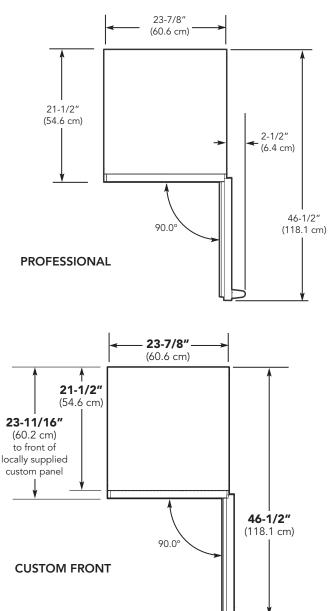





Undercounter/Freestanding 24"W. Dual Zone



UTILITY REQUIREMENTS

Installation Requirements

ACCESS REQUIREMENTS



GAS Not applicable



ELECTRICAL • Three-wire cord

- with grounded three-prong plug attached to product
- 115 VAC/60 Hz; 15 amp dedicated circuit
- Maximum amp usage—3.3



PLUMBING Not applicable




VUWC244 Professional



DFUW244 Custom Front

See **Custom Panels** section for more information and additional specifications.

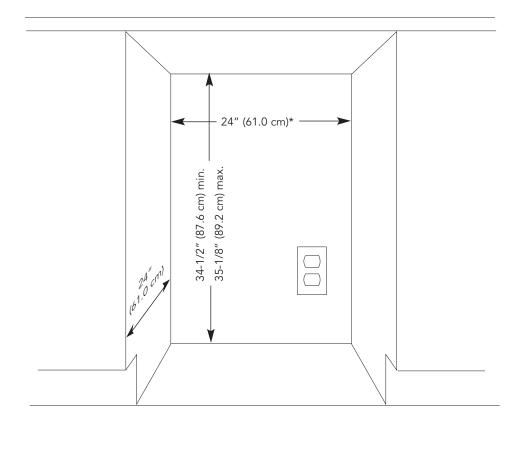

*24" (61.0 cm) width for cabinet only. If door is recessed between cabinets, cabinet cutout must be 24-1/4" (61.6 cm).

	All models
Cutout width	24" (61.0 cm)*
Cutout height	34-1/2" (87.6 cm) min. to 35-1/8" (89.2 cm) max.
Cutout depth	24" (61.0 cm)





REFRIGERATION Undercounter/Freestanding 24"W. Dual Zone Wine Cellar

*	*	

S Installation Notes & Accessories

Handle Kits

- For use with custom front 24"W. wine cellar
- For use on locally supplied custom front panels
- Handles allow custom front products to coordinate with other Professional & Designer products
- Kit includes one handle and installation hardware

Model	Description	Approx. ship wt. lbs. (kg)
PHK30-SS	Professional handle (Stainless Steel)	6 (2.7)
PHK30-BR	Professional handle (Brass)	6 (2.7)
DHK18-SS	Designer handle (Stainless Steel)	5 (2.3)
DHK18-BR	Designer handle (Brass)	5 (2.3)

Brass Handle Kit

• For use with Professional 24"W. wine cellar

Model	Description	Approx. ship wt. lb. (kg)
PURHK30-BR	Professional brass handle kit and logo for VUWC	6 (2.7)

Compliance Information



WARRANTY SUMMARY*

- Two-year full warranty—complete unit
- Six-year full warranty—sealed refrigeration system (includes compressor, condenser, dryer/strainer, evaporator, and connecting tubing)
- Twelve-year limited warranty—sealed refrigeration system
- Ninety-day limited warranty—cosmetic parts such as glass, painted, and decorative items

*For complete warranty see Use & Care Guide. Warranty valid on Viking products shipped within the United States and Canada.

