




E Series Built-In Single Ovens
MODELS SO30-2F/S AND SO30-2U/S



Model SO30-2F/S
Framed



Model SO30-2U/S
Unframed

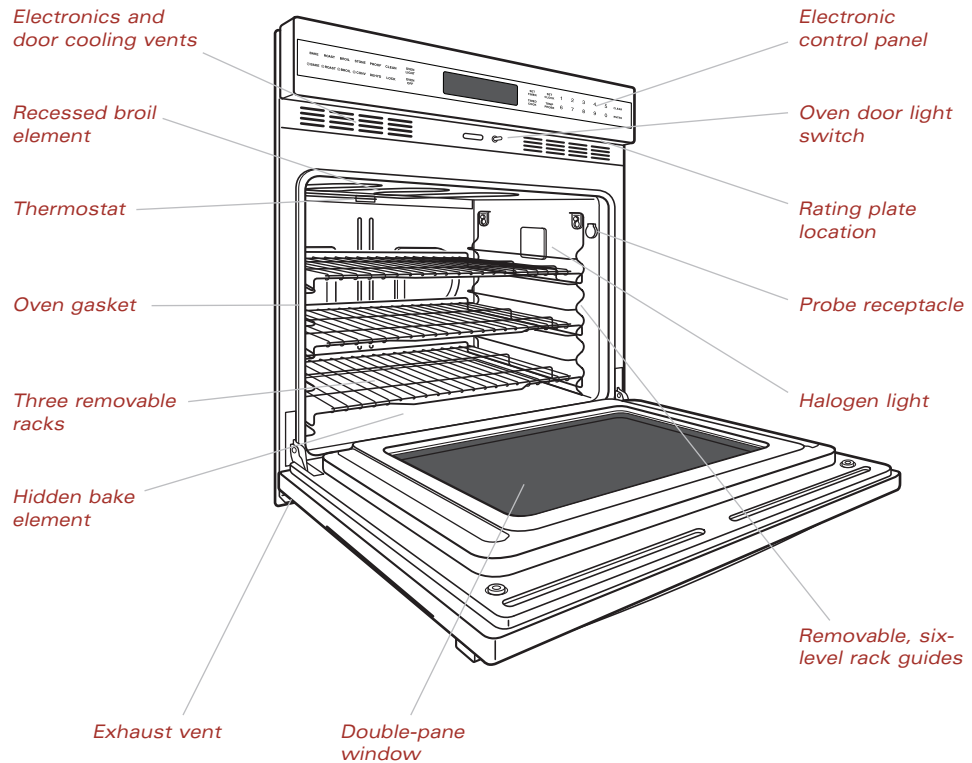

Model SO30-2U/S unframed door style shown.

► The Wolf E Series Model SO30-2F/S framed and Model SO30-2U/S unframed built-in single ovens are available in the classic stainless steel finish.

Wolf E Series built-in ovens come with the classic stainless steel finish and are offered in two different door styles—framed and unframed. The framed is more traditional and lends itself nicely with a professional rangetop, while the unframed is sleek and contemporary in appearance.

The E Series built-in design allows the front of the oven to be installed flush with surrounding cabinetry for a more integrated look or used in the standard application, where the oven trim will overlap the cabinet face.

Inside, the beauty, design and functionality continue. Brilliant halogen lights illuminate the beautiful blue interior. Pull that bottom oven rack all the way out and notice how it is nestled on the door rails. With the dual convection fans, E Series built-in ovens offer ten different cooking modes.




This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

E Series Built-In Single Ovens
MODELS SO30-2F/S AND SO30-2U/S

FEATURES

- ▶ Framed and unframed door styles available
- ▶ Classic stainless steel finish
- ▶ Dual convection logic control system
- ▶ Ten cooking modes—bake, roast, broil, convection bake, convection roast, convection broil, convection, bake stone (accessory required), dehydrate (accessory required) and proof
- ▶ Cobalt blue porcelain oven interior
- ▶ Three removable racks with full-extension bottom rack and removable six-level rack guides
- ▶ Large viewing double-pane window
- ▶ Dual interior halogen lighting
- ▶ Hidden bake element and recessed broil element
- ▶ Temperature probe and receptacle
- ▶ Self-clean, delayed start and Sabbath features
- ▶ Balanced door hinges assure smooth opening and closing of the door
- ▶ CSA certified for US and Canada
- ▶ Two and five year residential warranty—exclusions apply; warranty information can be found on our website, wolfappliance.com


OVERALL DIMENSIONS ▼

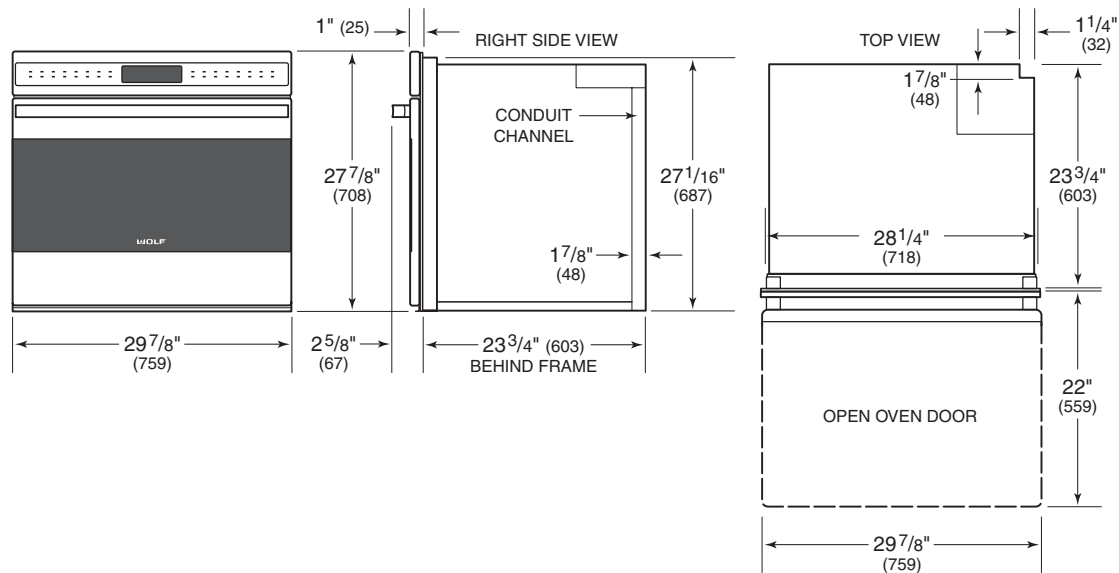


Unit dimensions may vary by ± 1/8" (3).

Dimensions in parentheses are in millimeters unless otherwise specified.

E Series Built-In Single Ovens
MODELS SO30-2F/S AND SO30-2U/S



Model SO30-2F/S
Framed



Model SO30-2U/S
Unframed

MODEL OPTIONS ▼

Framed Door Style	SO30-2F/S
Unframed Door Style	SO30-2U/S

ACCESSORIES

- ▶ Bake stone accessory, includes stone, rack and peel
- ▶ Two-piece broiler pan and temperature probe
- ▶ Set of three oven racks
- ▶ Dehydration racks with door stop

Accessories are available through your Wolf dealer. To obtain local dealer information, visit the Showroom Locator section of our website, wolfappliance.com.

SPECIFICATIONS ▼

Overall Oven Width	29 ⁷ / ₈ " (759)
Overall Oven Height	27 ⁷ / ₈ " (708)
Overall Oven Depth	23 ³ / ₄ " (603)
Open Oven Door Clearance	22" (559)
Overall Oven Interior Capacity	4.5 cu ft (127 L)
Overall Interior Dimensions	25" W x 16 ¹ / ₂ " H x 19" D (635 x 419 x 483)
Usable Interior Dimensions	21 ¹ / ₂ " W x 16 ¹ / ₂ " H x 16 ³ / ₈ " D (546 x 419 x 416)
Minimum Cabinet Width	Standard 30" (762) Flush Inset 33" (838)
Minimum Cabinet Depth	Standard 24" (610) Flush Inset 25" (635)
Minimum Base Support	250 lbs (113 kg)
Opening Width	28 ¹ / ₂ " (724)
Minimum Flush Inset Width	30 ³ / ₈ " (772)
Opening Height	27 ³ / ₁₆ " (691)
Minimum Flush Inset Height	28 ¹ / ₂ " (724)
Trim Overlaps	⁵ / ₈ " (16) top, ¹ / ₈ " (3) bottom ³ / ₄ " (19) each side
Electrical Supply Requirements	240/208 V AC, 60 Hz 30 amp circuit
Conduit	4 ft (1.2 m) flexible 3-wire
Electric Rating	5.1 kW at 240 V 3.8 kW at 208 V
Total Amps	21
Shipping Weight	273 lbs (124 kg)
Special Note	E Series single ovens may be used in a standard or flush inset installation


Specifications are subject to change without notice.

Unit dimensions may vary by ± 1/8" (3).


Dimensions in parentheses are in millimeters unless otherwise specified.

E Series Built-In Single Ovens
MODELS SO30-2F/S AND SO30-2U/S

STANDARD INSTALLATIONS

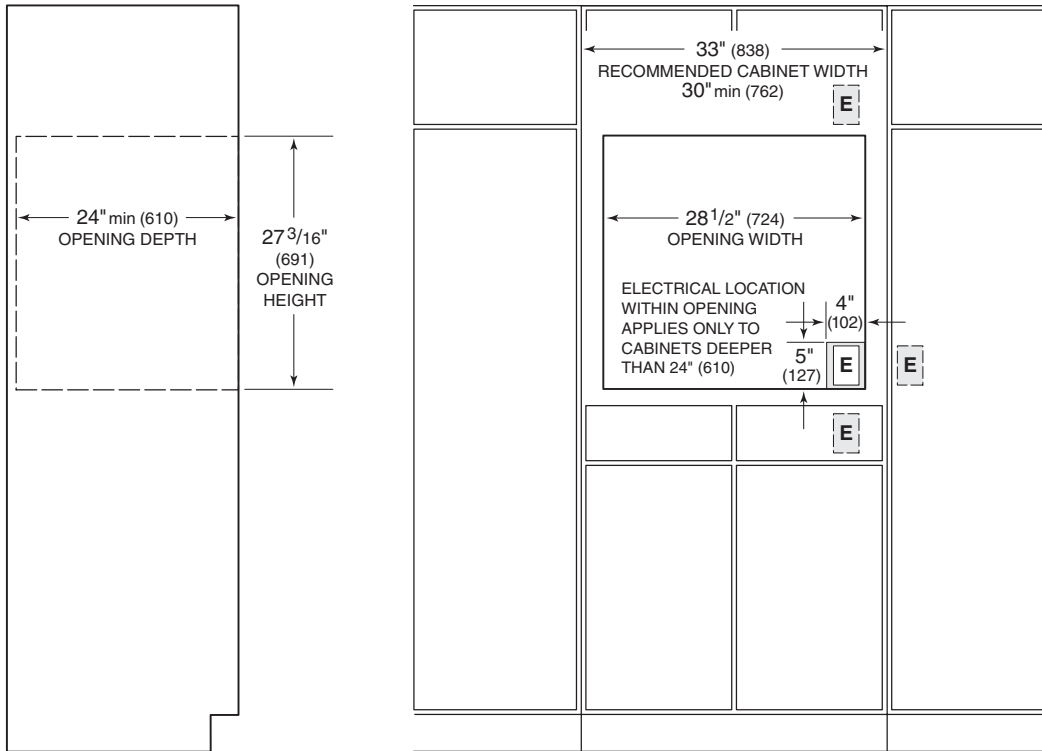


IMPORTANT NOTE: Unless you are using cabinets deeper than 24" (610), it is recommended that the electrical supply be placed in an adjacent cabinet within reach of the conduit. Choose the location shown in the illustrations that best suits your installation.

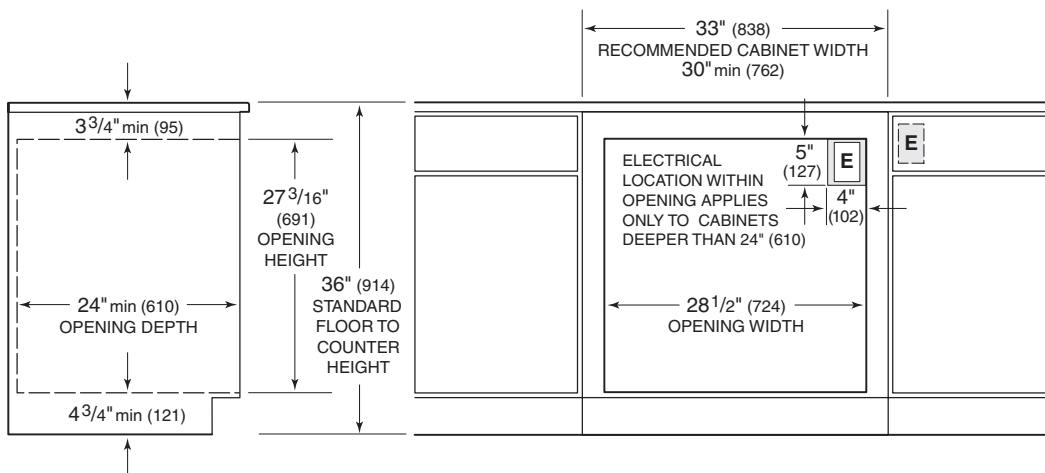

Dimensions in parentheses are in millimeters unless otherwise specified.

E Series Built-In Single Ovens
MODELS SO30-2F/S AND SO30-2U/S

FLUSH INSET INSTALLATION

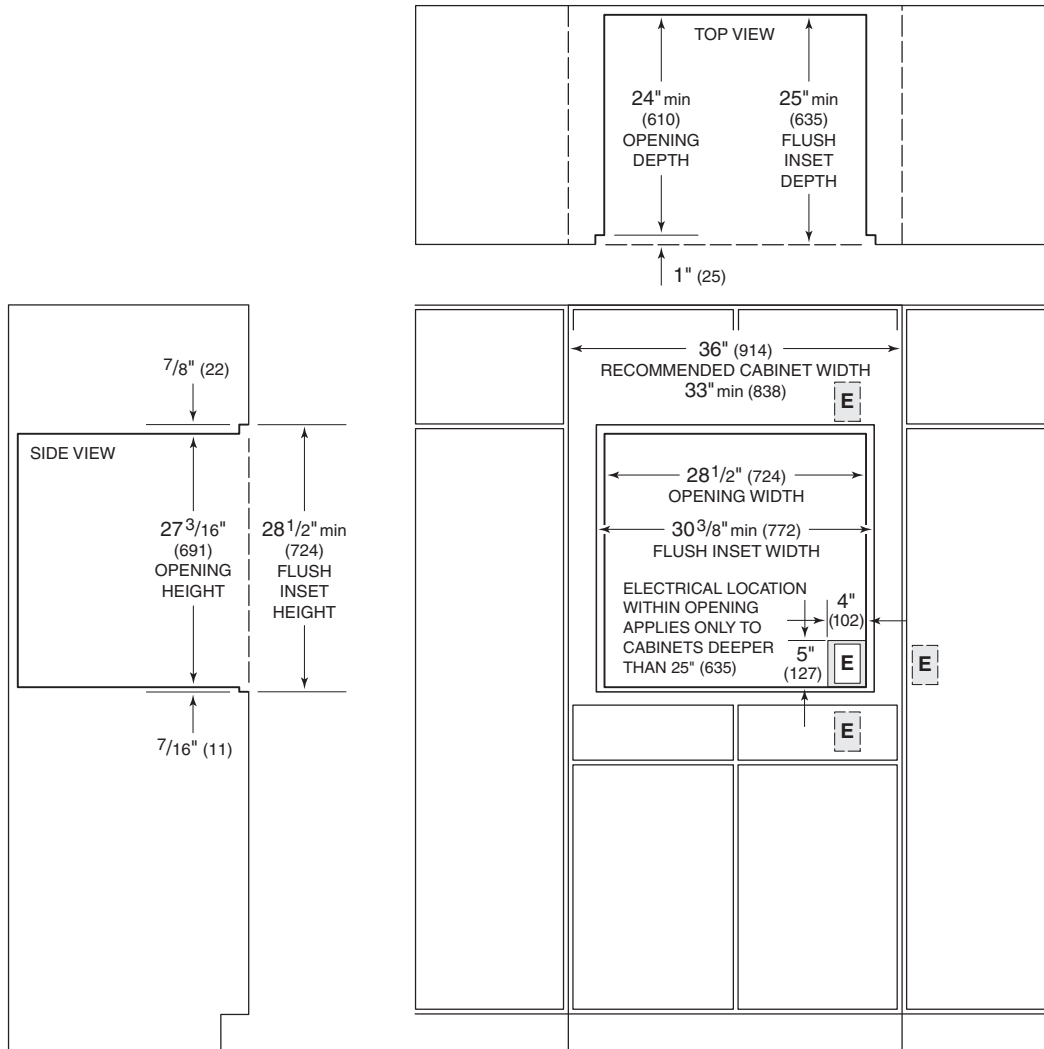

IMPORTANT NOTE: Unless you are using cabinets deeper than 25" (635), it is recommended that the electrical supply be placed in an adjacent cabinet within reach of the conduit. Choose the location shown in the illustrations that best suits your installation.

E Series Built-In Single Ovens

MODELS SO30-2F/S AND SO30-2U/S

INSTALLATION NOTES

- ▶ Refer to the illustrations and specifications for overall dimensions, finished rough opening dimensions and installation specifics.
- ▶ For ease of installation, Wolf recommends using a 33" (838) wide cabinet with the E Series single oven in a standard installation and a 36" (914) wide cabinet in a flush inset installation. The cabinet base platform must be able to support 250 lbs (113 kg).
- ▶ Wolf E Series built-in ovens may be used in a standard installation, where the face trim overlaps stiles and rails, or in a flush inset installation with the front of the oven flush with surrounding cabinetry. Refer to the illustrations on pages 4 and 5.
- ▶ For standard installations, the oven is installed by inserting into cabinetry from the front. The oven has a face trim on all four sides and will overlap stiles and rails. The trim overlaps $\frac{5}{8}$ " (16) on the top, $\frac{1}{8}$ " (3) on the bottom and $\frac{3}{4}$ " (19) on each side.
- ▶ The flush inset installation requires the oven to be recessed into the cabinet. A minimum 33" (838) wide and 25" (635) deep cabinet is needed if you want the front of the oven to be flush with surrounding cabinetry.

⚠ CAUTION

For flush inset installations, the inside edges of the rough opening must be finished, as they will be exposed when the oven door is open. These edges should be stained instead of having a laminated surface, to avoid damage from high temperatures during self-clean.

- ▶ E Series single ovens require a separate, grounded 3-wire 240/208 V AC, 60 Hz, 30 amp service with its own circuit breaker. Locate the electrical supply within the shaded area shown in the illustration for your specific installation on pages 4 and 5.

IMPORTANT NOTE: Unless you are using cabinets deeper than 24" (610) for a standard installation or 25" (635) for a flush inset installation, it is recommended that the electrical supply be placed in an adjacent cabinet within reach of the conduit. A 2" (51) diameter hole to route the conduit through cabinetry will be required. Refer to the Installation illustrations on pages 4 and 5 for location of the electrical supply for your specific installation.

- ▶ You must follow all National Electrical Code regulations. In addition, be aware of local codes and ordinances when installing your service.
- ▶ A Wolf E Series single oven may be installed below an induction, electric or gas cooktop. Unless you are using cabinets deeper than 24" (610) for a standard installation or 25" (635) for a flush inset installation, it is recommended that the electrical supply be placed in the base cabinet to the right of the oven within reach of the conduit.

IMPORTANT NOTE: Wolf built-in ovens are designed and agency approved for installation with Wolf cooktops only. A built-in oven cannot be installed below a Wolf rangetop. For additional specifications, refer to the induction, electric and gas cooktop sections of our website, wolfappliance.com.

- ▶ An E Series single oven may be installed in combination with a Wolf microwave and warming drawer. Refer to page 7 for specifications.
- ▶ The E Series single oven may be installed next to another E Series single oven. You must allow for a 2 $\frac{1}{2}$ " (64) space between the oven rough openings. Also, a separate inner wall is required for each oven between openings.
- ▶ Refer to the installation instructions shipped with each Wolf product for detailed specifications.

E Series Built-In Single Ovens
MODELS SO30-2F/S AND SO30-2U/S

STANDARD INSTALLATION OPTION


The Wolf E Series single oven may be installed in combination with a Wolf convection or non-convection microwave oven with 30" (762) E Series trim kit, and a Wolf warming drawer with E Series stainless steel drawer front or integrated drawer front. Refer to the illustration below, and pages 3–6 for installation specifications for E Series single ovens.

Wolf recommends using 33" (838) cabinets with this installation. Also, you need a minimum 24" (610) of usable cabinet depth for the oven.

The base platform for the microwave must be able to support 125 lbs (57 kg). The platform for the oven must be able to support a weight of 250 lbs (113 kg). And the warming drawer platform must be able to support 200 lbs (91 kg).

An anti-tip block or platform must be installed to prevent the warming drawer from tipping forward when the drawer is opened. The warming drawer must be fully enclosed, top and bottom.

For electrical requirements and additional specifications, refer to the microwave oven and warming drawer sections of our website, wolfappliance.com. Also refer to the installation instructions provided with the microwave trim kit and warming drawer front for detailed specifications.

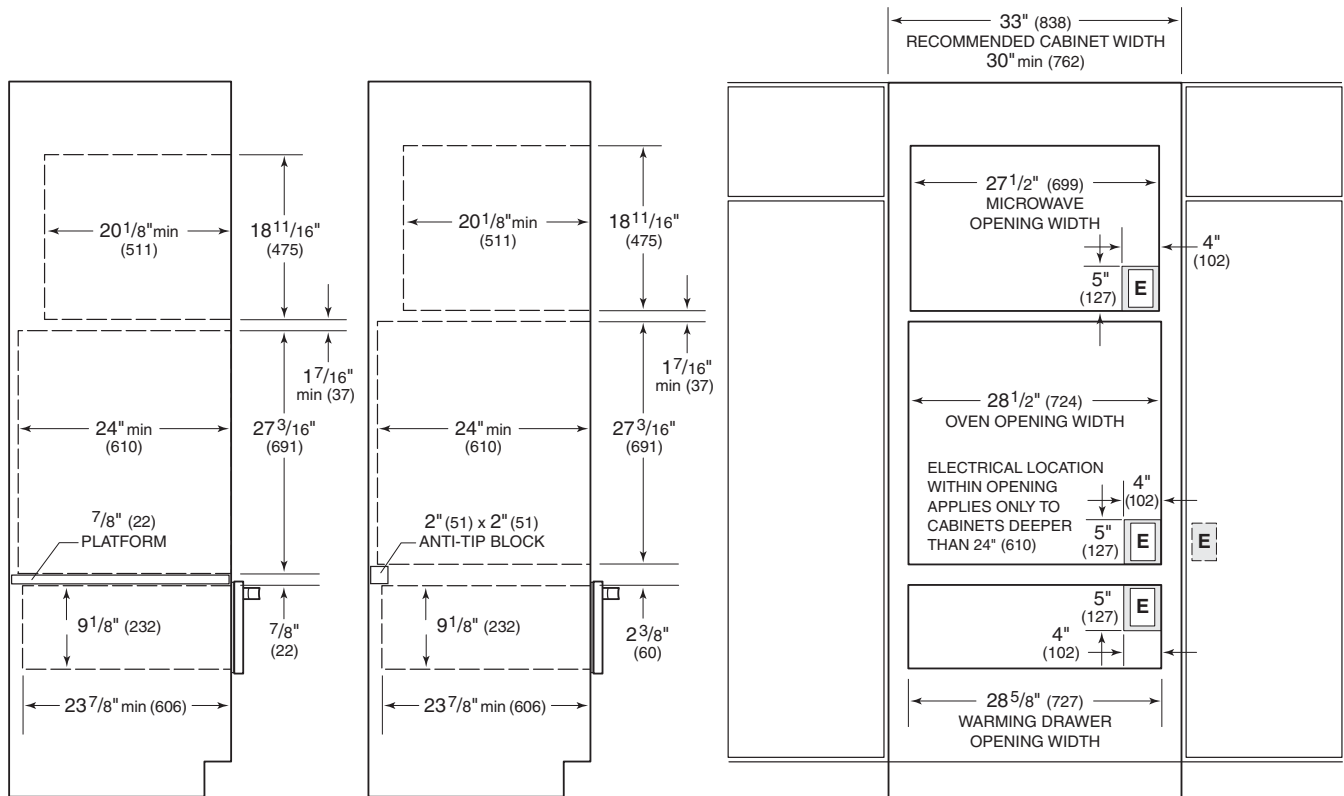

PLATFORM APPLICATION

ANTI-TIP BLOCK APPLICATION

NOTE: Unless you are using cabinets deeper than 24" (610), it is recommended that the electrical supply for the oven be placed in an adjacent cabinet within reach of the conduit.

Installation specifications for a single oven installed with convection microwave with 30" (762) E Series trim and warming drawer with E Series stainless steel drawer front.

Dimensions in parentheses are in millimeters unless otherwise specified.