

INSTALLATION INSTRUCTIONS

VIKING RANGE CORPORATION
111 FRONT STREET
GREENWOOD, MISSISSIPPI (MS) 38930 USA
(662) 455-1200

PROFESSIONAL SERIES HANDLE KIT

For Use with DFC Trash Compactor with Full Overlay Front
Retain for Future Reference

IMPORTANT-PLEASE READ AND FOLLOW

- Before beginning, please read these instructions completely and carefully.
- Do not remove permanently affixed labels, warnings, or plates from the product. This may void the warranty.
- Please refer to the Trash Compactor Installation Instructions for more information on installing the compactor door panel.
- The installer should leave instructions with the consumer who should retain for local inspector's use and for future reference.

INSTALLATION WITH WOODEN FULL OVERLAY CUSTOM DOOR FRONT

Parts included:


Professional Series Handle
(2) End Caps
(4) 1/4" x 1 1/4" Phillips Head Screws
Installation Instructions

Required Tools:

Electric Drill
Pilot Bit
1/4" (.6 cm) Drill Bit
Counter Sink Drill Bit
Rubber Mallet
Phillips Head Screwdriver
Masking Tape
Pencil
Tape Measure

To Install:

1. Using the illustration on the right, layout the handle location on the custom door. It is recommended that masking tape be placed where the four holes will be drilled to help mark the hole placement and to prevent any damage to the door when drilling the holes.
2. Drill small pilot holes completely through the door at each of the four hole locations.
3. The Professional Series handle will be mounted using the screws provided. These screws require the holes to be countersunk on the back of the panel in order for the storage compartment cover plate to fit flush against the compactor door panel. Using the four pilot holes as guides, drill completely through the door in the four hole locations with a 1/4" (.6 cm) bit. Countersink the four holes on the **backside** of the custom door panel.
4. Place a handle encap on both ends of the handle tube. Tap the endcaps firmly into place with a rubber mallet ensuring that both endcaps mounting surfaces are parallel.
5. Align the holes in the endcaps with the holes on the panel and attach the Professional Series handle to the panel using the four screws provided.

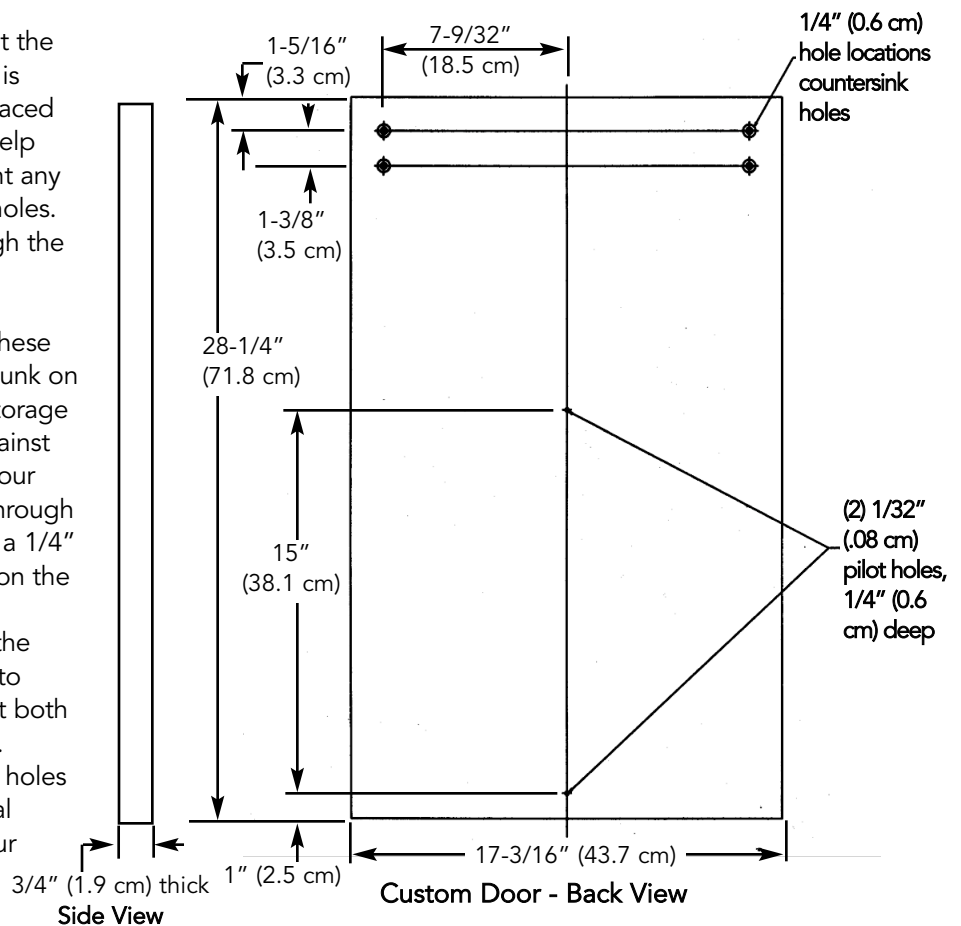

VIKING RANGE CORPORATION

111 Front Street • Greenwood, Mississippi (MS) 38930 USA • (662) 455-1200

Specifications subject to change without notice

For more product information, call 1-888-VIKING1 (845-4641) or visit our web site at <http://www.vikingrange.com>