## PGM304, PGM365 SGM304, SGM364, SGM365, SGM466



30", 36", 46" Wide,

91605 Preference™ Gas Cooktops

PLANNING GUIDE

1/2

2" (51mm) to Combustible Rear Wall
0" (0mm) to Non-Combustible Rear Wall


21"
(533mm)

6" (152mm) Min.
from edge of cooktop to combustible side wall above finished countertop (both sides)

OVERALL DIMENSIONS

Models	"A" Cooktop Width	"B" Cooktop Cutout Width	
30"	30" (762mm)	30" (762mm) 27 1/2" (699mm)	
36"	36" (914mm)	33 3/4" (857mm)	
46"	46" (1168mm)	44 1/2" (1130mm)	

(PGM304 Shown)

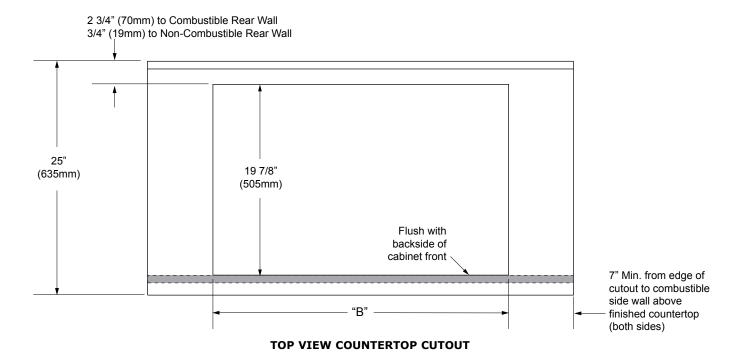

Web: http://www.dacor.com Corporate Phone: 800-793-0093

## PGM304, PGM365 SGM304, SGM364, SGM365, SGM466




091605

30", 36", 46" Wide, Preference™ Gas Cooktops

PLANNING GUIDE

2/2

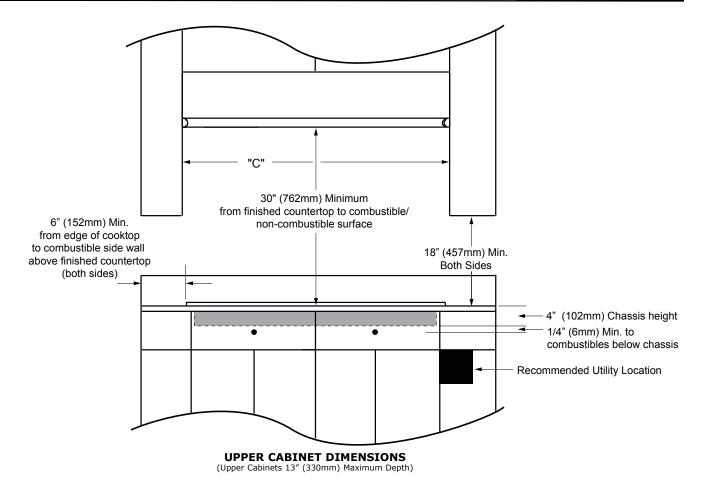

Models	"C" Min. Hood Width	"C" Recommended Hood Width	
30"	30" (762mm)	30" (762mm) 36" (914mm)	
36"	36" (914mm)	42" (1067mm)	
46"	46" (1166mm)	54" (1372mm)	

Model No.	Dedicated Circuit Required	Total Connected Load	Gas Supply Requirements	Approximate Shipping Weight
PGM304	120VAC, 60Hz, 15A (Breaker)	0.03kW (0.25A)	1/2" (13mm) Regulator - Natural Gas Standard	53 lbs.
SGM304				
SGM364				57 lbs.
PGM365			3/4" (19mm) Regulator - Natural Gas Standard	67 lbs.
SGM365			1/2" (13mm) Regulator - Natural Gas Standard	57 lbs.
SGM466				76 lbs.

## NOTES:

- Factory installed liquid propane (LP) special ordered.
- Cooktop is supplied with a 48" (1219mm) power cord, with a three prong grounded plug.
- Utilities are located in the right rear corner of the cooktop.
- 4. See the Combination Installation (CI) Section if installing with a downdraft, wall oven, or warming oven.

Specifications are subject to change without notice. **4.4**See installation instructions for additional details. L65335 rev E