

COMBINATION INSTALLATIONS



Slide-In Cooktop/ Warming Drawer


PLANNING GUIDE



WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- All appliances must be installed in accordance with the accompanying installation instructions.

All tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated

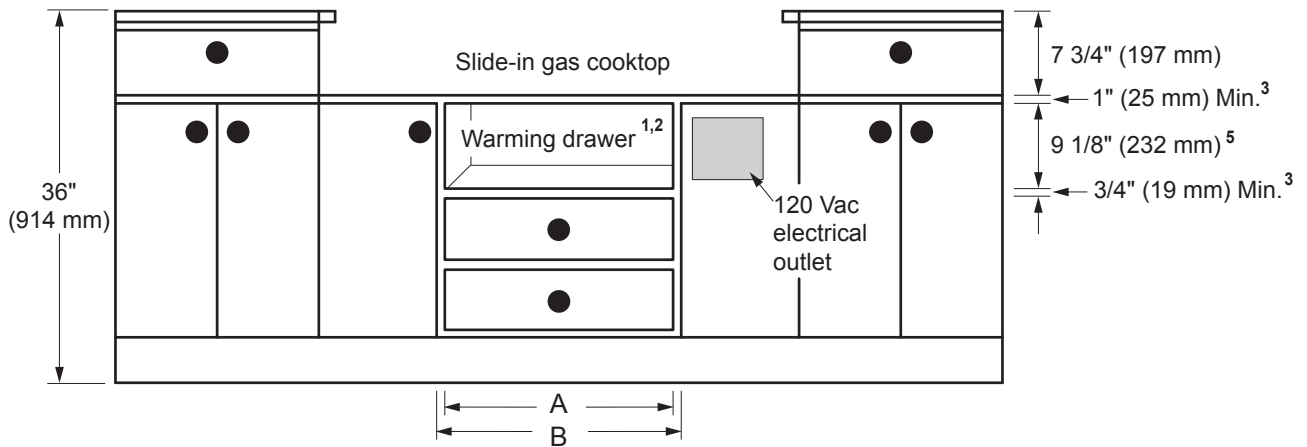

DRT/EG COOKTOP WITH WARMING DRAWER

Dacor Models	(A) Cabinet Cutout Width	(B) Min. ³ Cabinet Width
24"	22 1/2" (572 mm)	24 1/4" (616 mm)
27"	25 1/2" (648 mm)	27 1/4" (692 mm)
30"	28 1/2" (724 mm)	30 1/4" (768 mm)
36"	34 1/2" (876 mm)	36 1/4" (921 mm)



NOTES:

1. **24" (610 mm) minimum interior cabinet depth (20 1/8" for model OWD24).**
2. **Requires 3/4" (19 mm) support platform (flush with cutout).**
3. **Spacing may vary for warming drawers with a custom front panel. See warming drawer installation instructions for further details.**
4. **See individual appliance planning guides to determine overlays.**
5. **11 15/16" (303 mm) for OWD24.**
6. **Spacing shown is the bare minimum required for ventilation and to prevent scraping of doors and drawers. Additional spacing may be required for appearance.**