Document # PGCI-001


COMBINATION INSTALLATIONS

Revised 06/22/09 Page 1/1



EG/ESG Series Slide-in Cooktop with ERV/PRV Series Slim Raised Vent

PLANNING GUIDE

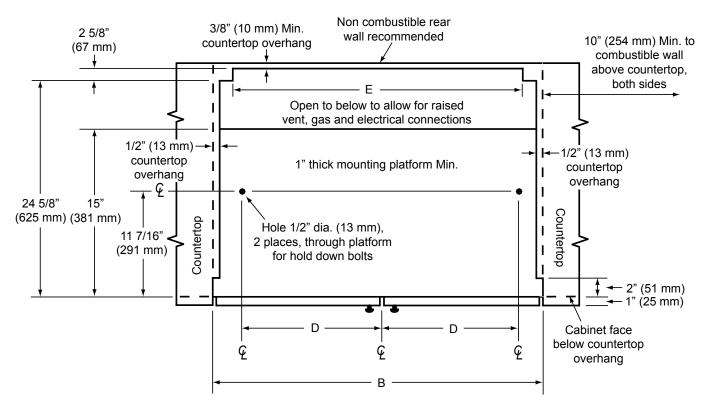

CABINET/COUNTERTOP CUTOUT DIMENSIONS WITH RAISED VENT - TOP VIEW

Model No.	Approved Raised Vent Models	
EG366 ESG366	ERV36, PRV36	
EG486 ESG486	ERV48, PRV48	

Stiffener EG or ESG series cooktop 3/8" Min. (10 mm) space behind raised vent Control panel chassis to clear Minimum stiffener countertop Cabinet faceheight: 30 1/4" Dacor approved (768 mm) raised vent IMPORTANT: See raised vent installation instructions for duct system layout/planning

3/8" Min. (10 mm) flat countertop overhang required behind cutout

Countertop

IMPORTANT: Use only approved raised vent models

Model	B - Cutout	D - Hole	E - Raised
No.	Width	Offset	Vent Cutout
EG366	36"	16 5/8"	33 1/2"
ESG366	(914 mm)	(422 mm)	(851 mm)
EG486	48"	20 13/16"	43 1/2"
ESG486	(1219 mm)	(529 mm)	(1105 mm)

Cutout tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated

CABINET/COUNTERTOP CUTOUT DIMENSIONS WITH RAISED VENT - SIDE VIEW

www.Dacor.com Phone: (800) 793-0093 Specifications are subject to change without notice. See installation instructions for additional details. **CI.10**