SCOTSMAN

WATER FILTRATION SYSTEMS AND REPLACEMENT CARTRIDGES







SSM-A WATER FILTERS

CLEANER, MORE CONSISTENT ICE CUBES

- Drastically reduces unscheduled, water-related maintenance calls...by as much as 40%.
- Reduces the formation of lime scale, the number one cause of service related problems.
- 99% removal of corrosive chlorine from the incoming water supply.
- · Takes out off-tastes and odors.
- Traps dirt and rust particles as small as onehalf micron in size, resulting in crystal clear, healthier ice.

WARRANTY See dealer for complete warranty details.

• 5 year parts only

NSF INTERNATIONAL STANDARDS

Standard No. 42: Aesthetic Effects

Chemical Unit

Chlorine Reduction, Class I Taste and Odor and Reduction Mechanical Filtration Unit Particulate Reduction, Class I:

99.9% reduction of particles 1/2 micron and larger in size

Standard No. 53: Health Effects

Mechanical Filtration Unit Turbidity Reduction Cyst Reduction Asbestos Reduction


The SSM filter and replacement cartridge have been Tested and Listed by NSF only for the functions listed above. Check for compliance with state and local laws and regulations. Do not use where the water is microbiologically unsafe, or with water of unknown quality without adequate disinfection before or after the unit. Can be used on water that may contain filterable cysts.

9001:2000





Water Filtration Systems & Replacement Cartridges

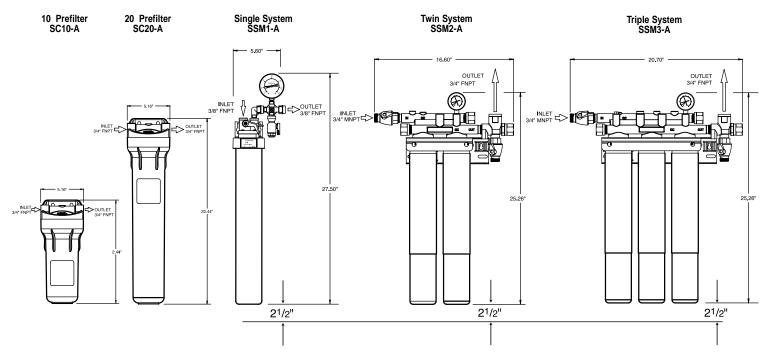

IMPORTANT: Must have minimum 21/2" clearance for cartridge change.

Water Filter Systems

Model	Dimensions* W x D x H	Shipping Weight lb./kg.	Used On	Flow Rate gallons per minute
SSM1-A	69 x 59 x 29 ¹ /2"	7/3	Cubers up to 650 lb., flakers, nuggets, and nugget dispensers up to 1,200 lb.	1.67
SSM2-A	12" X 5 ¹ / ₂ " X 25 ¹ / ₂ "	11/5	Cubers from 650 to 1300 lbs., flakers and nuggets over 1,200 lb.	3.34
SSM ₃ -A	15 ¹ / ₂ " X 5 ¹ / ₂ " X 25 ¹ / ₂ "	16/7	Cubers over 1300 lbs.	5.01

Coarse Pre-Filters

SC10-A	7" x 7 "x 14"	5/2	10" Coarse prefilter to remove particles	5.00
SC20-A	7" X 7" X 24 ³ /8"	11/5	20" Coarse prefilter to remove particles	10.00

*Includes 2 1/2" clearance below.

REPLACEMENT CARTRIDGES

Model	Per Package Quantity	Shipping Weight lb./kg.	Used On
SSMRC1	1	3/1	SSM1-A - SSM3-A
SSMRC6	6	7/3	SSM2-A - SSM3-A
SC10RC40	40	17/8	SC10-A
SC20RC20	20	17/8	SC20-A

Scotsman's ice machines are not designed for outdoor installations. Scotsman remote condensers are designed for outdoor installations.

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Extended periods of operation at temperatures exceeding limitations constitutes misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Specifications and design are subject to change without notice.

Consult Your Local SCOTSMAN Representative At:

IMPORTANT OPERATING REQUIREMENTS:

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (37.7°C)
Water Temperatures	40°F (4.4°C)	100°F (37.7°C)
Water Pressures	20 PSIG	80 PSIG

Capacity Certified for chlorine reduction for up to 9000 gallons

Flow Rate 1.67gpm (6.3 Lpm) per cartridge

