

PURCHASER	P.O. #	DATE
PROJECT	LOCATION	
ENGINEER	ARCHITECT	
SUBMITTED BY	FOR APPROVAL	FOR REFERENCE

ITEM	PLAN DESIGNATION	QUANTITY	COOLING BTU/H	VOLTAGE	FRIEDRICH MODEL

Comfort & Convenience

- 24 hr. timer lets you program on/off times*
- 3 cooling speeds, plus fan-only setting**
- Smart Fan adjusts fan speed to maintain desired temperature*
- Comfortwatch technology samples the air to more accurately maintain the set temperature
- Money Saver® setting saves money by conserving energy*
- Ultraquiet operation
- 8-way air flow control
- Auto restart saves settings if power is interrupted*

Health

- Washable antimicrobial filter for protection against fungal and bacterial growth

Installation

- Slide-out chassis
- Install in window or thru-the-wall
- Heavy duty installation hardware
- Heavy duty side curtains reduce exterior noise/light
- Power cord can run either left or right out of the side of the unit front
- The industry's smallest BTU/h slide-out chassis (model XQ05)

Safety Features

- EntryGard anti-intrusion protection
- Insect barrier



XQ



EQ

* Feature not available on EQ. **EQ has 2 cooling speeds, 2 heating speeds and fan-only setting

Specifications


★ ENERGY STAR® qualified


Model	Cooling Capacity Btu	Heating Capacity Btu	Volts Rated	Cooling Amps	Cooling Watts	Heating Amps	Heating Watts	COP	Energy Efficiency Ratio EER	Moisture Removal Pints/HR	Room Side Air Circulation CFM	Sleeve	Net Weight Lbs
XStar®													
★ XQ05M10	5500	—	115	4.5	491				11.2	1.0	170	Q	72
★ XQ06M10	6000	—	115	4.9	500				12.0	1.0	175	Q	72
★ XQ08M10	7500	—	115	6.3	701				10.7	1.7	175	Q	71
XQ10M10	9500	—	115	9.0	970				9.8	2.5	180	Q	71
XStar® Electric Heat													
EQ08M11	7500	4000	115	6.3	701	11.2	1290	2.8	10.7	1.9	175	Q	72

Installation Information / Sleeve Dimensions

Sleeve	Height	Width	Depth with Front	Shell Depth to Louvers	Minimum Extension Into Room*	Minimum Extension Outside*	Window Width		Thru-the-wall Installation Finished Hole		
			A	B			Minimum**	Maximum	Height	Width	Max. Depth C
Q	14"	19 3/4"	21 3/8"	8 1/2"	5 1/2"	10 3/4"	22"	42"	14 1/4"	20"	8 1/2"

Circuit Rating/ Breaker

Model	Circuit Rating Breaker or T-D Fuse	Plug Face (NEMA#)	Power Cord Length (ft.)	Wall Outlet Appearance
All XQ MODELS and EQ08M11.	125V - 15A	5 - 15P	6	

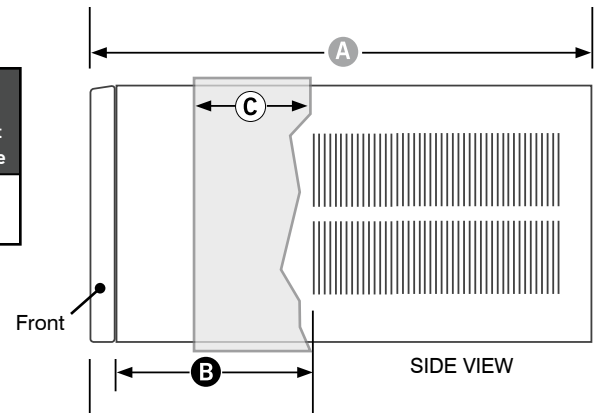

Window Mounting Kits

Heat/Cool Models	Kit No.
EQ08M11	WIKQ

Friedrich heat/cool models include accessories for thru-the-wall installation only. Window mounting requires use of optional accessory kit as listed above.

Friedrich room air conditioners are designed to operate in outdoor temperatures from 60° F to 115° F.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.

As an ENERGY STAR® partner, Friedrich Air Conditioning Co. has determined that the selected ENERGY STAR® (★) models meet the ENERGY STAR® guidelines for energy efficiency.

The consumer- through the AHAM Room Air Conditioner Certification Program- can be certain that the AHAM Certification Seal accurately states the unit's cooling and heating capacity rating, the amperes and the energy efficiency ratio.

