

PURCHASER	P.O. #	DATE
PROJECT	LOCATION	
ENGINEER	ARCHITECT	
SUBMITTED BY	FOR APPROVAL	FOR REFERENCE

ITEM	PLAN DESIGNATION	QUANTITY	COOLING BTU/H	VOLTAGE	FRIEDRICH MODEL

COMPACT SIZE (70-83lbs.) FOR EASIER REMOVAL AND STORAGE | 5,500 to 11,700 BTU/h EERs up to 11.5

### Digital Control Features

- 24-hour timer lets you program on/off times
- 3 cooling speeds, plus fan-only setting
- MoneySaver® setting saves energy by cycling the fan with the compressor
- Smart Fan adjusts fan speed to maintain desired temperature
- Unique Comfortwatch technology
- Memory backup saves settings if power is interrupted



*\*When only one side panel assembly is utilized. See installation information for more details.*

### Ultra Premium Features

- Ultraquiet operation
- 8-way air flow control
- Slide-out chassis for more permanent window or wall installation
- Washable, antimicrobial filter for protection against fungal and bacterial growth
- Heavy duty side curtains reduce exterior noise/ light
- Rust proof base pan



**THE INDUSTRY'S SMALLEST SLIDE-OUT CHASSIS- MODEL XQ05**

ONE TOUCH OPERATION	REMOTE CONTROL	24 HR. TIMER	MONEY SAVER FEATURE	SMART FAN	ANTIMICROBIAL FILTER	SLIDE-OUT CHASSIS
✓	✓	✓	✓	✓	✓	✓

**3** ENERGYSTAR® models



# Specifications ENERGY STAR® Models

Model	Cooling Capacity BTU/h	Heating Capacity Rated	Electrical Characteristics (60 Hertz)				Energy Efficiency Ratio EER	Moisture Removal Pints/Hr.	Room Side Air Circulation CFM	Sleeve*	Net Weight Lbs	
			Volts Rated	Cooling Amps	Cooling Watts	Heating Amps						Heating Watts
<b>COMMERCIAL GRADE</b>												
<b>XSTAR</b>												
 XQ05L10A	5500	—	115	5.0	500	—	—	<b>11.0</b>	1.2	200	Q	70
 XQ06L10A	6300	—	115	4.9	548	—	—	<b>11.5</b>	1.4	175	Q	70
 XQ08L10A	8000	—	115	6.8	741	—	—	<b>10.8</b>	1.9	175	Q	77
XQ10L10A	10000	—	115	9.0	1000	—	—	<b>10.0</b>	3.2	180	Q	83
XQ12L10A	11700	—	115	11.0	1198	—	—	<b>9.8</b>	3.2	200	Q	83

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.

## Installation Information / Sleeve Dimensions


Sleeve	Height	Width	Depth with Front	Shell Depth to Louvers	Minimum Extension Into Room*	Minimum Extension Outside*	Window Width		Thru-the-wall Installation Finished Hole		
			<b>A</b>	<b>B</b>			Minimum**	Maximum	Height	Width	Max. Depth <b>C</b>
<b>Q</b>	14"	19 3/4"	21 3/8"	8 1/2"	5 1/2"	10 3/4"	22"	42"	14 1/4"	20"	8 1/2"

\* Minimum extensions when mounted in a window.

\*\* Minimum widths achieved using one side curtain assembly as opposed to both in a standard installation.

## Circuit Rating/ Breaker

Model	Circuit Rating Breaker or T-D Fuse	Plug Face (NEMA#)	Power Cord Length (ft.)	Wall Outlet Appearance
All XQ MODELS.	125V - 15A	5 - 15P	6	

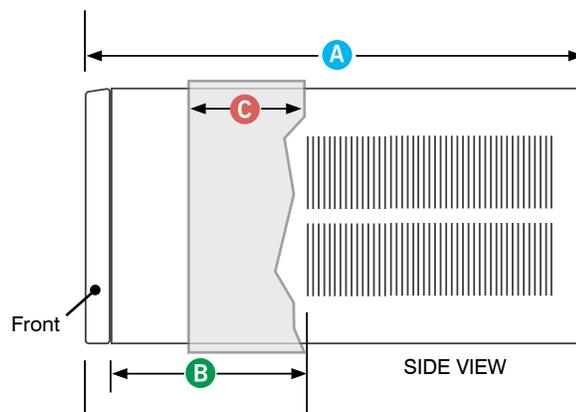

 As an ENERGY STAR® partner, Friedrich Air Conditioning Co. has determined that the selected ENERGY STAR® () models meet the ENERGY STAR® guidelines for energy efficiency.



The consumer- through the AHAM Room Air Conditioner Certification Program- can be certain that the AHAM Certification Seal accurately states the unit's cooling and heating capacity rating, the amperes and the energy efficiency ratio.