

Model 2310HD

LCD Screen 23-inch diagonal TFT Active Matrix Resolution 1366 x 768 WXGA Aspect Ratio 16:9 Active Area 508.1 x 285.7 mm Contrast Ratio 700:1 Response Time 8 milliseconds H/V Viewing Angle 160° by 140° Display Colors 16.7 million Input Connectors: Antenna/CATV (NTSC, ATSC, QAM) HDMI HDMI Input x1/HDCP Video Composite S-Video x1 and Composite Video x1 L/R Audio Inputs x2 Video Component YCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1 PC 15-pin D-sub VGA Input Power 100-240 VAC, 50-60 Hz 130W Audio 10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear cover Operating Temp. -24º to 140° F. (-31° to 60° C.) * Non-op. Temp. (Off-mode with power applied) 23.51 in. W x 16.27 in. H x 4.90 in. D Accessories Included Water-resistant remote control with lithium battery Removable table stand TV Dimensions 23.51 in. W x 16.27 in. H x 4.90 in. D Weight 22 lbs. Shipping Wieght	LCD Screen	22 inch diagonal TET Active Matrix
Aspect Ratio 16:9 Active Area 508.1 x 285.7 mm Contrast Ratio 700:1 Response Time 8 milliseconds H/V Viewing Angle 160° by 140° Display Colors 16.7 million Input Connectors: Antenna/CATV (NTSC, ATSC, QAM) HDMI HDMI Input x1/HDCP Video Composite S-Video x1 and Composite Video x1 L/R Audio Inputs x2 Video Composite S-Video x1 and Composite Video x1 L/R Audio Inputs x2 Video Component YCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1 PC 10-240 VAC, 50-60 Hz 130W Audio 10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear cover Operating Temp. -24° to 122° F. (-31° to 50° C.) * Non-op. Temp. (Off-mode with power applied) -24° to 140° F. (-31° to 60° C.) Accessories Included Water-resistant remote control with lithium battery Removable table stand TV Dimensions 23.51 in. W x 16.27 in. H x 4.90 in. D Weight 22 lbs. Shipping Wieght 28 lbs.		÷
Active Area 508.1 x 285.7 mm Contrast Ratio 700:1 Response Time 8 milliseconds H/V Viewing Angle 160° by 140° Display Colors 16.7 million Input Connectors: Antenna/CATV (NTSC, ATSC, QAM) HDMI HDMI Input x1/HDCP Video Composite S-Video x1 and Composite Video x1 L/R Audio Inputs x2 Video Component YCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1 15-pin D-sub VGA Input Power 100-240 VAC, 50-60 Hz 130W Audio 10-vatt x 2 channels, water-resistant speakers L/R Audio output connector inside rear cover Operating Temp. -24° to 122° F. (-31° to 50° C.) * Non-op. Temp. (Off-mode with power applied) Vater-resistant remote control with lithium battery Removable table stand TV Dimensions 23.51 in. W x 16.27 in. H x 4.90 in. D Weight 22 lbs. Shipping Wieght 28 lbs.	nesonation	
Contrast Ratio700:1Response Time8 millisecondsH/V Viewing Angle160° by 140°Display Colors16.7 millionInput Connectors: RFAntenna/CATV (NTSC, ATSC, QAM)HDMIHDMI Input x1/HDCPVideo CompositeS-Video x1 and Composite Video x1 L/R Audio Inputs x2Video ComponentYCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1PC100-240 VAC, 50-60 Hz 130WAudio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	Aspect Ratio	16:9
Response Time8 millisecondsH/V Viewing Angle160° by 140°Display Colors16.7 millionInput Connectors: RFAntenna/CATV (NTSC, ATSC, QAM)HDMIHDMI Input x1/HDCPVideo CompositeS-Video x1 and Composite Video x1 L/R Audio Inputs x2Video ComponentYCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1PC100-240 VAC, 50-60 Hz 130WAudio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Non-op. Temp. (Off-mode with power applied)23.51 in. W x 16.27 in. H x 4.90 in. DVieight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	Active Area	508.1 x 285.7 mm
H/V Viewing Angle160° by 140°Display Colors16.7 millionInput Connectors: RFAntenna/CATV (NTSC, ATSC, QAM)HDMIHDMI Input x1/HDCPVideo CompositeS-Video x1 and Composite Video x1 L/R Audio Inputs x2Video ComponentYCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1PC100-240 VAC, 50-60 Hz 130WAudio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Non-op. Temp. (Off-mode with power applied)23.51 in. W x 16.27 in. H x 4.90 in. DVieight22 lbs.Shipping Wieght28 lbs.	Contrast Ratio	700:1
Display Colors16.7 millionDisplay Colors16.7 millionInput Connectors: RFAntenna/CATV (NTSC, ATSC, QAM)HDMIHDMI Input x1/HDCPVideo CompositeS-Video x1 and Composite Video x1 L/R Audio Inputs x2Video ComponentS-Video x1 and Composite Video x1 L/R Audio Inputs x2Video ComponentYCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1 PCPC100-240 VAC, 50-60 Hz 130WAudio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Non-op. Temp. (Off-mode with power applied)-24° to 140° F. (-31° to 60° C.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 Ibs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 Ibs.	Response Time	8 milliseconds
Input Connectors: RFAntenna/CATV (NTSC, ATSC, QAM)HDMIHDMI Input x1/HDCPVideo CompositeS-Video x1 and Composite Video x1 L/R Audio Inputs x2Video ComponentYCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1PC15-pin D-sub VGAInput Power100-240 VAC, 50-60 Hz 130WAudio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Non-op. Temp. (Off-mode with power applied)-24° to 140° F. (-31° to 60° C.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 Ibs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 Ibs.	H/V Viewing Angle	160° by 140°
RFAntenna/CATV (NTSC, ATSC, QAM)HDMIHDMI Input x1/HDCPVideo CompositeS-Video x1 and Composite Video x1 L/R Audio Inputs x2Video ComponentS-Video x1 and Composite Video x1 L/R Audio Inputs x2Video ComponentYCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1 PCInput Power100-240 VAC, 50-60 Hz 130WAudio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Non-op. Temp. (Off-mode with power applied)-24° to 140° F. (-31° to 60° C.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	Display Colors	16.7 million
Numerical NoticeNumerical NoticeVideo CompositeS-Video x1 and Composite Video x1 L/R Audio Inputs x2Video ComponentYCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1 15-pin D-sub VGAInput Power100-240 VAC, 50-60 Hz 130WAudio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Non-op. Temp. (Off-mode with power applied)-24° to 140° F. (-31° to 60° C.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.		Antenna/CATV (NTSC, ATSC, QAM)
Video ComponentL/R Audio Inputs x2Video ComponentYCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1PC15-pin D-sub VGAInput Power100-240 VAC, 50-60 Hz 130WAudio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Non-op. Temp. (Off-mode with power applied)-24° to 140° F. (-31° to 60° C.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	HDMI	HDMI Input x1/HDCP
PCFreedy, Freedy, Fre	Video Composite	·
Input Power100-240 VAC, 50-60 Hz 130WAudio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Non-op. Temp. (Off-mode with power applied)-24° to 140° F. (-31° to 60° C.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	Video Component	
Audio10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear coverOperating Temp24° to 122° F. (-31° to 50° C.) *Non-op. Temp. (Off-mode with power applied)-24° to 140° F. (-31° to 60° C.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	PC	15-pin D-sub VGA
Non-op. Temp. (Off-mode with power applied)-24° to 122° F. (-31° to 50° C.) *Accessories Included-24° to 140° F. (-31° to 60° C.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	Input Power	100-240 VAC, 50-60 Hz 130W
Non-op. Temp. (Off-mode with power applied)-24° to 140° F. (-31° to 60° C.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	Audio	
(Off-mode with power applied)21 to 110 tr (31 to 00 ct.)Accessories IncludedWater-resistant remote control with lithium battery Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	Operating Temp.	-24° to 122° F. (-31° to 50° C.) *
Removable table standTV Dimensions23.51 in. W x 16.27 in. H x 4.90 in. DWeight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	(Off-mode with	-24° to 140° F. (-31° to 60° C.)
Weight22 lbs.Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	Accessories Included	
Shipping Dimensions30.31 in. W x 19.49 in. H x 8.86 in. DShipping Weight28 lbs.	TV Dimensions	23.51 in. W x 16.27 in. H x 4.90 in. D
Shipping Weight 28 lbs.	Weight	22 lbs.
201001	Shipping Dimensions	30.31 in. W x 19.49 in. H x 8.86 in. D
Warranty One-year, in-factory, parts and labor	Shipping Weight	28 lbs.
	Warranty	One-year, in-factory, parts and labor



Model 2310HD

Super Bright 23" LCD Screen, HD Ready

All-weather enclosure protects internal components from rain, dirt, insects and scratches

Dual airflow system keeps unit cool and dry in temperatures up to 122 degrees F.


Internal thermostatically-controlled heater protects TV in temperatures as low as -24 degrees F.

Innovative watertight cable entry system with passthrough design keeps cables dry and allows for easy hook-ups

Optional wall mounts and deck planter poles are weatherized and include stainless steel hardware

SunBriteTV Model 2310HD

(All dimensions are in inches)

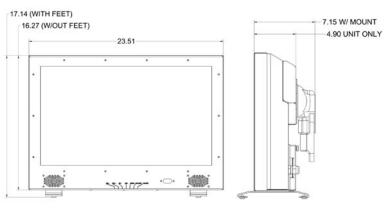

TV Dimensions are: 23.51 in. W x 16.27 in. H x 4.90 in. D Height dimension with table stand is 17.14 in. TV with optional wall mount measures 7.60 in. when folded flush against the wall.

SB-CM20	Ceiling mount with tilt and swivel includes adjustable extension column that provides 5" to 11" above unit to ceiling. Also includes 4" x 4" designer ceiling plate. Meets VESA standards.
SB-WM23	Articulating wall mount with tilt, swivel, pan and extends up to 9" from wall. Meets VESA standards.
SB-DP20X	Deck/Planter pole (requires purchase of wall mount). Special order item.
SB-FMT23	RadioFM ^{™,} transmits audio from TV to FM radio
SB-DC23	Outdoor TV dust cover

Specifications may be subject to change.

866.357.8688

www.sunbritetv.com

5069 Maureen Lane • Moorpark, CA 93021 Patent pending. All rights reserved. (C) 2006 SunbriteTV LLC

*Temperature range is for operation in shaded location.