

Pilato



WALL-MOUNT CHIMNEY HOOD

Pilato features an elegantly rounded front that softens the unit's striking angles and "pro kitchen" profile. Available in 30" or 36" width, Pilato features include a powerful 600 CFM blower, halogen lighting with 2 light intensities, dishwasher-safe anodized aluminum mesh filters and high-tech multi-function LCD controls that deliver convenience and safety. Pilato's 22 5/8" depth and greater air capture capacity make the unit an excellent choice over pro-style stoves. Add baffle slot filters (available accessory) for greater airflow and grease capture when using over pro-style stoves. Designed for standard ducted installation, Pilato can also be installed as a recirculating system using the Recirculating Kit, available as an accessory.

FEATURES

• **Advanced Electronic Touch Controls**

State-of-the-art electronics deliver maximum user convenience and control. LCD function display with elegant blue illumination combined with low-profile, easy-to-clean touchpads is your interface with a multi-function control system, including...

- On/Off control
- Programmable timer and buzzer
- Four blower speeds
- Clock
- **HeatGuard™** automatically adjusts blower speed if heat exceeds 158°F for safety and convenience
- Two light intensities
- Filter Saturation Monitor detects excessive levels within both grease and charcoal filters



• **600 CFM 4-Speed Internal Blower**

• **2 Halogen Lamps** with two light intensities (120V 50W bulbs included)


• **Dishwasher-Safe Anodized Aluminum Mesh Filters** (2 with 30" unit, 3 with 36" unit)



Elica-Patented Stainless Steel Baffle Slot Filter

Available as an optional upgrade
(see back for accessory details)

- **Telescopic Chimney Extension** – For ceiling heights 7' 5" to 9' 2"
- **8" Round Duct Transition**
- **One-Way No Return Valve** eliminates outside air drafts.

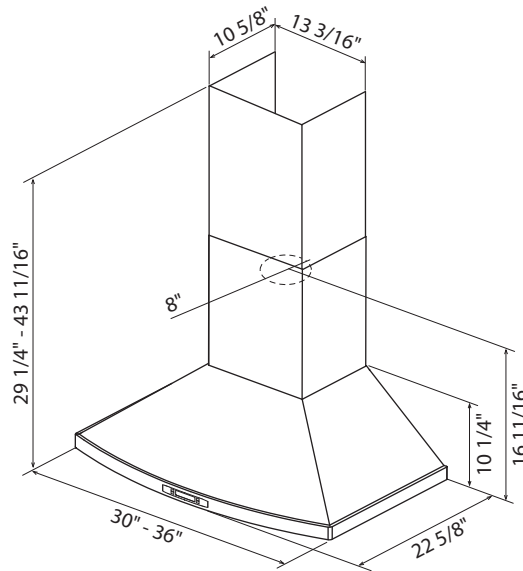

MODEL NUMBER	FINISH	WIDTH	DIMENSIONS DEPTH	HEIGHT	SHIPPING WEIGHT
EPL630SS	Stainless Steel	30"	22 5/8"	10-1/4"	59 lbs
EPL636SS	Stainless Steel	36"	22 5/8"	10-1/4"	63 lbs

HOOD MOUNTING HEIGHT ABOVE COOKING SURFACE

GAS		ELECTRIC	
<u>minimum</u>	<u>maximum</u>	<u>minimum</u>	<u>maximum</u>
30"	34"	24"	30"

CHIMNEY HEIGHT (based on recommended mounting heights listed above)

DUCTED		RECIRCULATING	
<u>Gas min./max.</u>	<u>Electric min./max.</u>	<u>Gas min./max.</u>	<u>Electric min./max.</u>
7' 11" - 9' 2"	7' 5" - 8' 10"	7' 11" - 9' 6"	7' 5" - 9' 2"

BLOWER PERFORMANCE

SPEED LEVEL	AIRFLOW IN CFM (CUBIC FEET PER MINUTE)	SOUND LEVEL (IN SONES)
1	160	1.7
2	280	3.3
3	475	6.0
4	600	8.2

PILATO ACCESSORIES

MODEL NUMBER	DESCRIPTION	SHIPPING WEIGHT
EXXRCK06	Recirculating Kit	6.6 lbs
EXXGFKMH	Stainless Steel Micro Hole Filter	5.5 lbs
EXXGFKBS	Stainless Steel Baffle Slot Filter	5.5 lbs

  **ELECTRICAL:**
AC Input: 120V - 60Hz, AC Power Max.: 550W at 4.6 Amps