outdoor Liberty, Collection,



All-Grill Unit



BFG-30G 30" All-Grill with optional cart, side shelves, wood inserts and back bar

The All-Grill unit of the Liberty Collection is a fully featured grill, which delivers professional performance and delicious results. Precision ported, U-shaped 304 grade stainless steel burners rated at 25,000 BTU's per burner offer powerful performance and control.

Our patented Grease Management System® reduces flare-ups by effectively channeling oil and grease away from the flame while grilling. A 9-volt Battery Ignition ensures safe and efficient grill lighting every time and Double-Sided Cast 304 Grade Stainless Steel Grilling Grates feature one side with a gentle radius for support and handling while the other side is W-shaped for maximum grease capture while leaving perfect sear lines. Ceramic Radiant Technology provides intense, even heat.


ADDITIONAL FEATURES


- Large 525 sq. in. grilling surface
- Sear setting
- Patented Grease Management System® reduces flare-ups
- Ceramic Radiant Technology ensures a completely evenly heated cooking surface
- 2 x 25,000 BTU burners
- Flat stainless steel cover included

All-Grill Dimensions (with optional grill cart)

Grill Model: BFG-30G

Cart Model: CAD-30 (shown with optional side shelves)

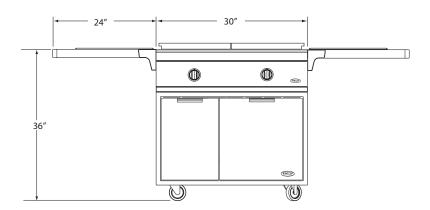




MODEL NUMBER	BFG-30BG
TOTAL COOKING AREA	525 SQ. INCHES
GRILL BURNERS	2 @ 25,000 BTU/HR
DOUBLE-SIDED GRILL GRATES	STAINLESS STEEL
GREASE MANAGEMENT SYSTEM®	V
SHIPPING WEIGHT (GRILL HEAD)	120 LBS.
SHIPPING WEIGHT (OPTIONAL CART)	120 LBS.
SHIPPING DIMENSIONS (GRILL HEAD) (HEIGHT X WIDTH X DEPTH)	32" X 32" X 16"

All-Grill Island Preparation

Grill Model: BFG-30G



- * Standard cut-out dimensions for non-combustible enclosure ** Insulated jacket cut-out dimensions for combustible enclosure \triangle Island installation to use minimum of 3 vents providing
- 10 square inches per vent (typical)

Ordering Data:

Please specify gas type (natural or propane) when ordering

Gas Requirements:

- Natural

 1/2" NPT male with a 3/8" flare adapter

 Operational Pressure: 4" W.C.
- Supply Pressure: 6" to 9" W.C.

- 1/2" NPT male with a 3/8" flare adapter
 LP hose with a quick disconnect & fitting are shipped connected
- Operational Pressure: 11" W.C.
 Supply Pressure: 11" to 14" W.C.
- Power Requirements:
 - 9V battery

Island Ventilation Requirements:
It is recommended that adequate ventilation holes must be provided in the base of an enclosure in the event of a gas leak.

Grill Placement:

DO NOT build grill under overhead unprotected combustible construction. Use only in well-ventilated areas. These units are for outdoor use only. If located in a consistently windy area (oceanfront, mountaintop, etc.) a wind break will be required.

Conversion Kits:

NG to LP and LP to NG conversion kits are available from your

Accessories

- Stainless Steel Grill Cart (CAD-30)
 Single or double side burners for built-in application
 Stainless Steel Access Doors for built-in application
- Stainless Steel Access Drawers for built-in application
- Insulated Jacket for built-in application
- Grilling Tool Set
 Brazilian Cherry Chopping Board that fits in cart optional side-shelf
- Drop-on Griddle PlateVinyl Grill Cover

We encourage you to find out more about these features and learn how they can make your cooking experience more enjoyable by visiting our learning page at: www.dcsappliances.com.

Because of continuing product improvement these specifications are subject to change without notice