



# Drop-In Cooktops

FFGC3613L S/W/B

36" Gas



## Product Dimensions

Width	36"
Depth	18"
Height	3-1/2"

## More Easy-To-Use Features

### Electronic Pilotless Ignition

Saves energy and can be ignited manually when electricity is out.

### Spill Saver™ Drip Bowls

Cooktop features drip bowls that make cleaning up spills quick and easy.

### Porcelain Cooktop Grates

Grates are durable and easy to clean.

### LP Gas Conversion Option

A.D.A. Compliant<sup>2</sup>

### Available in:



Burners	BTU
Right Front	12,000
Right Rear	5,000
Left Front	9,500
Left Rear	9,500

## Signature Features

### Ready-Select™ Controls

Select options or control cooking temperature with our easy-to-use controls.

### Sealed Gas Burners

Enjoy easier cleanup and a burner that stays looking great.

### Durable Stainless Steel Cooktop<sup>1</sup>

A premium look that stands up to everyday use.

### Color-Coordinated Control Knobs

White and Black cooktops come with matching knobs — while Stainless Steel models feature our neutral black knobs.


<sup>1</sup>Select models only.

<sup>2</sup>When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

Features	
Controls	Ready-Select™
Surface Type	Stainless Steel (S), Color-Coordinated Porcelain (W/B)
Sealed Gas Burners	Yes
Grates	Cast Iron with Black Matte Finish
Right Front Element (BTU)	12,000
Right Rear Element (BTU)	5,000
Left Front Element (BTU)	9,500
Left Rear Element (BTU)	9,500
Control Location	Center Front
Knob Color	Black (S), Color-Coordinated (W/B)
Knob Type	Plastic
Bowl Type	Black (S), Color-Coordinated (W/B)
Certifications	
A.D.A. Compliant <sup>1</sup>	Yes
Specifications	
Power Supply Connection Location	Right Rear
Gas Supply Connection Location	Right Rear
LP Gas Conversion Kit	Included
Voltage Rating	120V / 60V / 15A
Connected Load (kW Rating) @ 120 Volts <sup>2</sup>	.8
Amps @ 120 Volts	1.0
Minimum Circuit Required (Amps)	15
Approved for Electric Single Wall Oven Combination Installation	
Shipping Weight (Approx.)	40 Lbs.

<sup>1</sup>When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

<sup>2</sup>For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

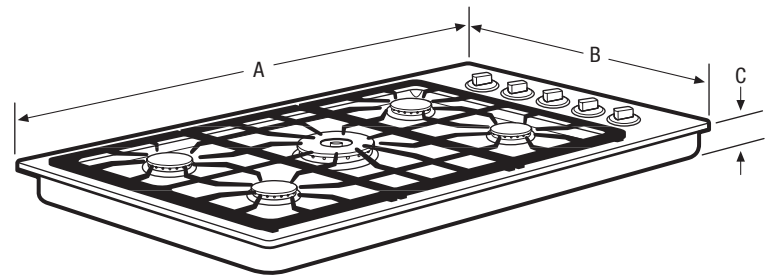

**NOTE:** Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).



Product Dimensions	
A - Width	36"
B - Depth	18"
C - Height	3-1/2"

Cutout Dimensions	
Width (Min.)	34-1/4"
Width (Max.)	34-3/8"
Depth (Min.)	16-5/8"
Depth (Max.)	16-3/4"
Height	5"

Granite Countertop Installation Kit available.

Accessories information available on the web at [frigidaire.com](http://frigidaire.com)