



Drop-In Cooktop

FFEC3603L W

36" Electric



Product Dimensions

Width	36"
Depth	18"
Height	3-7/8"

More Easy-To-Use Features

"On" Indicator

Alerts you when your cooktop is on.

Spill Saver™ Drip Bowls

Cooktop features chrome drip bowls that make cleaning up spills quick and easy.

A.D.A. Compliant¹

Available in:



White
(W)

Elements	Size	Watts
Right Front	6"	1,250
Right Rear	8"	2,100
Left Front	8"	2,100
Left Rear	6"	1,250

¹When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

Signature Features

Ready-Select™ Controls

Select options or control cooking temperature with our easy-to-use controls.

Approved Over Frigidaire® Electric Wall Ovens

Cooktops are approved for installation above any of our Electric Single Wall Ovens.

Spill Saver™ Cooktop

Cooktop contains your spillovers for easier cleanup.

Color-Coordinated Control Knobs


White cooktops come with matching knobs.

Features	
Controls	Ready-Select™
Surface Type	Color-Coordinated Porcelain
Right Front Element (Watts)	6" - 1,250
Right Rear Element (Watts)	8" - 2,100
Left Front Element (Watts)	8" - 2,100
Left Rear Element (Watts)	6" - 1,250
"On" Indicator	Yes
Control Location	Center Front
Knob Color	Color-Coordinated
Knob Type	Plastic
Bowl Type	Chrome
Certifications	
A.D.A. Compliant ¹	Yes
Specifications	
Power Supply Connection Location	Center Front
Voltage Rating	240V/208V/60Hz
Connected Load (kW Rating) @ 240/208 Volts ²	6.7/5.0
Amps @ 240/208 Volts	22.3/19.2
Minimum Circuit Required (Amps)	30
Approved for Electric Single Wall Oven Combination Installation ³	Yes
Shipping Weight (Approx.)	30 Lbs.

¹When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

²Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

³Cooktops are approved for installation above any of our Electric Single Wall Ovens.

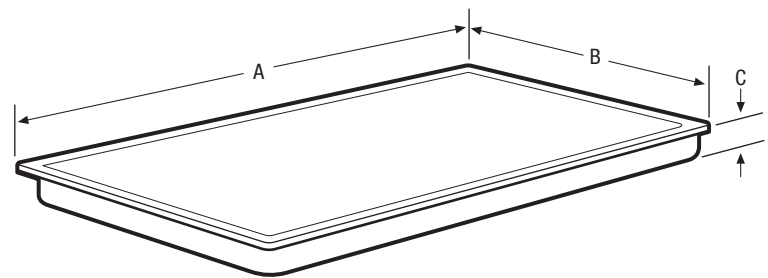

NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.




Product Dimensions	
A - Width	36"
B - Depth	18"
C - Height	3-7/8"

Cutout Dimensions	
Width (Min.)	31"
Width (Max.)	31-1/4"
Depth (Min.)	16-5/8"
Depth (Max.)	16-3/4"
Height	5-7/8"

Granite Countertop Installation Kit available.

Accessories information available on the web at frigidaire.com

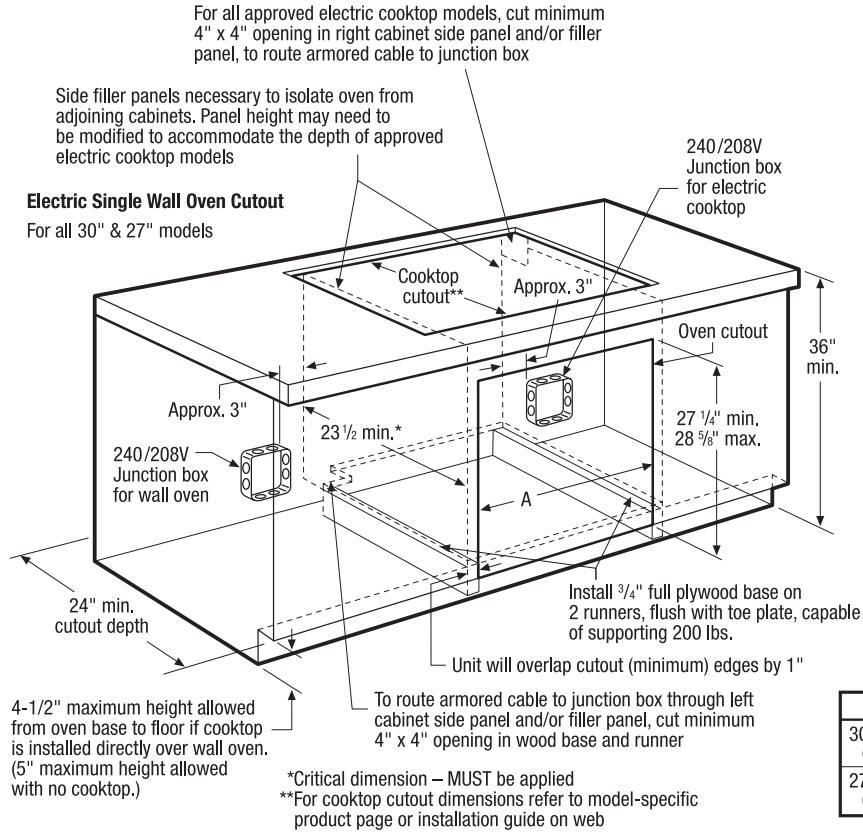

30"/27" Electric Single Wall Oven Under-Counter Installation Specifications

- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- For detailed electrical requirements, refer to model-specific product page and installation guide on web.
- Always consult local and national electric codes.
- Minimum 21" clearance for oven door depth when open.
- Minimum 23-1/2" deep cutout dimension is critical for proper installation, to ensure that oven's faceplate will fit flush against cabinet front.
- Full oven base of solid plywood or similar material required, capable of supporting 200 Lbs. Install over two runners and flush with toe plate.
- Base must be level and cabinet front must be square.
- Allow 5" maximum height from oven base to floor, if NO cooktop is installed directly over wall oven.

Electric Cooktop Installation Over 30"/27" Electric Single Wall Oven Specifications

- All Frigidaire® Electric Single Wall Ovens are approved to be used beneath any approved Frigidaire® Electric Cooktop.
- For detailed Electric Cooktop installation, refer to model-specific product page and installation guide on web.
- Side filler panels necessary to isolate oven from adjoining cabinets. Panel height may need to be modified to accommodate the depth of approved electric cooktop models.
 - To route armored cable to junction box, cut minimum 4" x 4" opening in right cabinet side panel.
 - Allow 4-1/2" maximum height from oven base to floor, if cooktop is installed directly over wall oven.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.