

Models 2220HD

Specifications

Specifications	
LCD Screen	22-inch diagonal TFT Active Matrix
Resolution	1366 x 768
Aspect Ratio	16:9
Contrast Ratio	2500:1
H/V Viewing Angle	176° by 176°
Response Time	6.5 milliseconds
TV Formats	1080i, 720p, 480i, 480p
Input Connectors:	
RF	Antenna/CATV (NTSC, ATSC, QAM)
HDMI	HDMI Input x 2
Video Composite	S-Video x1 and Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr x1 plus Stereo Audio x 2
PC	15-pin D-sub VGA plus Stereo Audio
Control Set	RS232 Serial, Discrete IR, Concealed IR Window
Audio Out	SPDIF Audio, Analog 1/8" Headphone Jack
Speakers	10-watt Detachable Speaker Module
Exterior	Powder-coated Aluminum
Input Power	100-240 VAC, 50-60 Hz 1.5A Max
Operating Temp.	-24° to 122° F. (-31° to 50° C.) *
Non-op. Temp. (Off-mode with power applied)	-24° to 140° F. (-31° to 60° C.) The non-operating temperature feature requires power to be applied
Accessories Included	Weather-Proof Remote Control Removable table top stand
TV Dimensions	23 in. W x 14.80 in. H (16.49 in H w/speaker module), x 4.55 in. D
Weight	20 lbs., 23 lbs. with feet
Shipping Dimensions	28 in. W x 23 in. H x 10 in. D
Shipping Weight	25 lbs.
Warranty	Two-year, in-factory, parts and labor

^{*}Temperature range is for operation in shaded location.




Designed with a durable All-weather Environmental Feature-Set, SunBriteTV engineers their televisions for permanent outdoor installation:

- The extra bright 22-inch HD 1366 x 768 LCD screen is integrated into an all-weather exterior that protects the internal components from rain, dirt, insects and scratches.
- Dual-fan Airflow System keeps the unit cool and dry in temperatures up to 122 degrees F.
- Internal Thermostatically-Controlled Heater protects TV in temperatures as low as -24 degrees F.
- Innovative Water-tight Cable Entry System with pass-through design keeps cables dry and allows for easy hook-ups.
- Anti-Reflective Window reduces glare, increases contrast and protects the LCD screen.
- The detachable speaker module, control buttons and remote control are also water-resistant.
- Remote Control Lock-out prevents unauthorized users from changing the programming.
- Sleep Mode automatically turns the TV to the Off mode when the signal is removed, and turns it back to On when the signal is restored.
- RS232 and Discrete IR input connectors simplify control functions.

SunBriteTV Model 2220HD

(All dimensions are in inches)

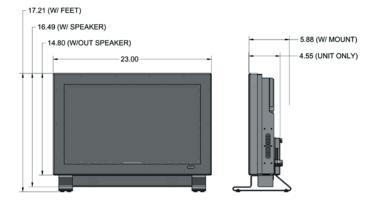

TV Dimensions are:
23 in. W x 16.49 in. H x 4.55 in. D
Height dimension without speaker module is 14.80
Height dimension with table top stand is 17.21 in.
Depth dimension with table top stand is 8.46 in.

TV with optional wall mount measures 5.88 in. when folded flush against the wall.

Optional Accessories:

SB-CM20	Ceiling mount with tilt, includes adjustable extension column that provides 5" to 11" above unit to ceiling. Also includes 4" x 4" designer ceiling plate. Meets VESA standards.
SB-WM23	Articulating wall mount with tilt, swivel, pan and extends up to 9" from wall. Meets VESA standards.
SB-DP2332X	Deck/Planter pole (requires purchase of wall mount). Special order item.
SB-FMT-U	RadioFM ^{™,} transmits audio from TV to FM radio
SB-DC23	OutdoorTV dust cover

866.357.8688

www.sunbritetv.com

5069 Maureen Lane, Unit A • Moorpark, CA 93021