



FS627CSS

Commercially approved undercounter all-freezer capable of -25° C operation in complete stainless steel;

Highlights:

Flexible design allows built-in or freestanding use

ETL-S listed for commercial use

built-in or freestanding capable

Complete construction in stainless steel for durability with modern luxury


Functional elegance with a sturdy towel bar handle in brushed stainless steel



| Commercially approved | ETL-S Approved to ANSI-NSF Standard 7 and CalCode Compliant |
|---|---|
| Complete stainless steel exterior | Durable design with lasting elegance |
| Professional towel bar handle | A curved stainless steel handle provides generous room for a comfortable grip |
| Slim undercounter dimensions | Less than 24 inches wide to fit tight spaces |
| Built-in capable | Make the best use of space by installing your appliance under the counter and flush with other cabinets |
| Fully finished askingt | Allower than free area to be a read free story divin |
| Fully finished cabinet | Allows the freezer to be used freestanding |
| -25° C capable | Low temperature operation is ideal for vaccine, pharmaceuticals, and other temperature sensitive materials |
| • | Low temperature operation is ideal for vaccine, pharmaceuticals, and other temperature sensitive |
| -25° C capable | Low temperature operation is ideal for vaccine, pharmaceuticals, and other temperature sensitive materials |
| -25° C capable Manual defrost Three removable storage | Low temperature operation is ideal for vaccine, pharmaceuticals, and other temperature sensitive materials No temperature fluctuations with a manual defrost system that keeps the cold inside |

Specifications:

| Height | 33.25 up to 34.5" |
|----------------------------|--------------------|
| Width | 23.75" |
| Depth | 23.5" |
| Capacity | 3.2 cu.ft. |
| Ext Depth with Handle | 24.75" |
| Interior Height 1 | 24.25" |
| Interior Width 1 | 17.75" |
| Interior Depth 1 | 16.5" |
| Comp Step Height | 6.5" |
| Comp Step Width | 17.5" |
| Comp Step Depth | 5.5" |
| Height Adjustable | true |
| Shipping Weight | 143.0 lbs. |
| US Electrical Safety | UL |
| Amps | 1.3 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Canadian Electrical Safety | ULC |
| Reversible | Factory Reversible |
| Door Swing | RHD |
| Drawers | true |
| Drawer Quantity | 3 |
| Defrost Type | Manual |
| Depth with door at 90° | 45.5" |
| Height to Hinge Cap | 34.75" |
| Thermostat Type | Dial |
| Condensor Location | Rear of Unit |
| Fan Type | Exterior |
| Level Legs Quantity | 4 |
| High Side PSI | 235.0 |
| Freon Type | R134a |
| Low Side PSI | 70.0 |
| Freon Oz | 2.7 |
| Compressor Warranty | 5 Years |
| Parts/Labor Warranty | 1 Year |
| Sanitation | ETL-S |
| | |

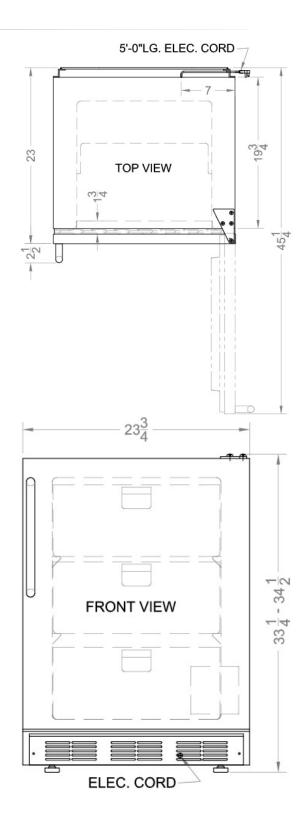

Phone: 718-893-3900 • Fax: 718-842-3093 Email: info@summitappliance.com