

Capacity: Produces up to 60 lbs of ice per day/30 lbs storage
 Defrost Type: Frost-free
 Colors: Stainless Steel, Black, White

Echelon Series

Features & Benefits




Feature	Benefit
High daily ice production and storage	Produces up to 60 lbs of ice per day and stores up to 30 lbs
Electronic control module	Automatically adjusts for changes in room and water temperatures to maximize ice production and provide consistently sized ice cubes
Touch Control Digital Technology	<ul style="list-style-type: none"> • Initiates the Automatic Self-Cleaning process • Enables the consumer to adjust the size of the ice cube • Turns the unit on/off
Easy, self-cleaning process	<ul style="list-style-type: none"> • Simple and easy to use. Within one hour, the CLR2160's internal components have been thoroughly cleaned and rinsed. • Ensures high quality ice, plus helps to maintain proper operation
Optional 3/4" full overlay door panel	<ul style="list-style-type: none"> • Provides a fully integrated appearance with surrounding décor while maintaining zero clearance • Easy to install • Black and white models only • Must order kit number U-OL2115
Standard door will accept a 1/4" panel	<ul style="list-style-type: none"> • Ability to match surrounding décor and cabinets • Black and white models only
Flexible water drain options	Water may be drained using either a gravity feed drain or a U-Line supplied P60 drain pump. See back page for more information.
Built-in or freestanding	<ul style="list-style-type: none"> • Provides custom look • No additional clearance around sides, top or rear of unit for ventilation. Do not obstruct the grille.
Stainless steel model	<ul style="list-style-type: none"> • Offers a full wrap stainless door and cabinet, along with a curved, sculpted stainless door handle and a stainless-like grille • Must be ordered right- or left-hand hinged • Optional bold commercial-style stainless handle available for purchase
Self-closing door	<ul style="list-style-type: none"> • Engages when the door is open 8-10" • Ensures a positive door seal and prevents door bounce-back
Field-reversible doors	<ul style="list-style-type: none"> • Flexible installation options • Black and white models only
Integrated handle	<ul style="list-style-type: none"> • Sleek designer look that does not add depth to the cabinet when built in • Black and white models only
Vinyl-clad cabinets	<ul style="list-style-type: none"> • Textured, rich look. More resistant to scratching, peeling and flaking • Cabinet extends to the floor • Black and white models only
Leveling legs	More precise undercounter fit - durable - factory installed
Sabbath or "Black Out" mode	<ul style="list-style-type: none"> • Easily turns off all lights and control displays • Automatically resets after 36 hours
Contemporary grille design	Integrates with surrounding cabinetry
Outdoor use	The stainless steel model is deemed suitable for outdoor use.

Dimensions & Specifications

Echelon Series

CLR2160

CLR2160 (Stainless Steel)

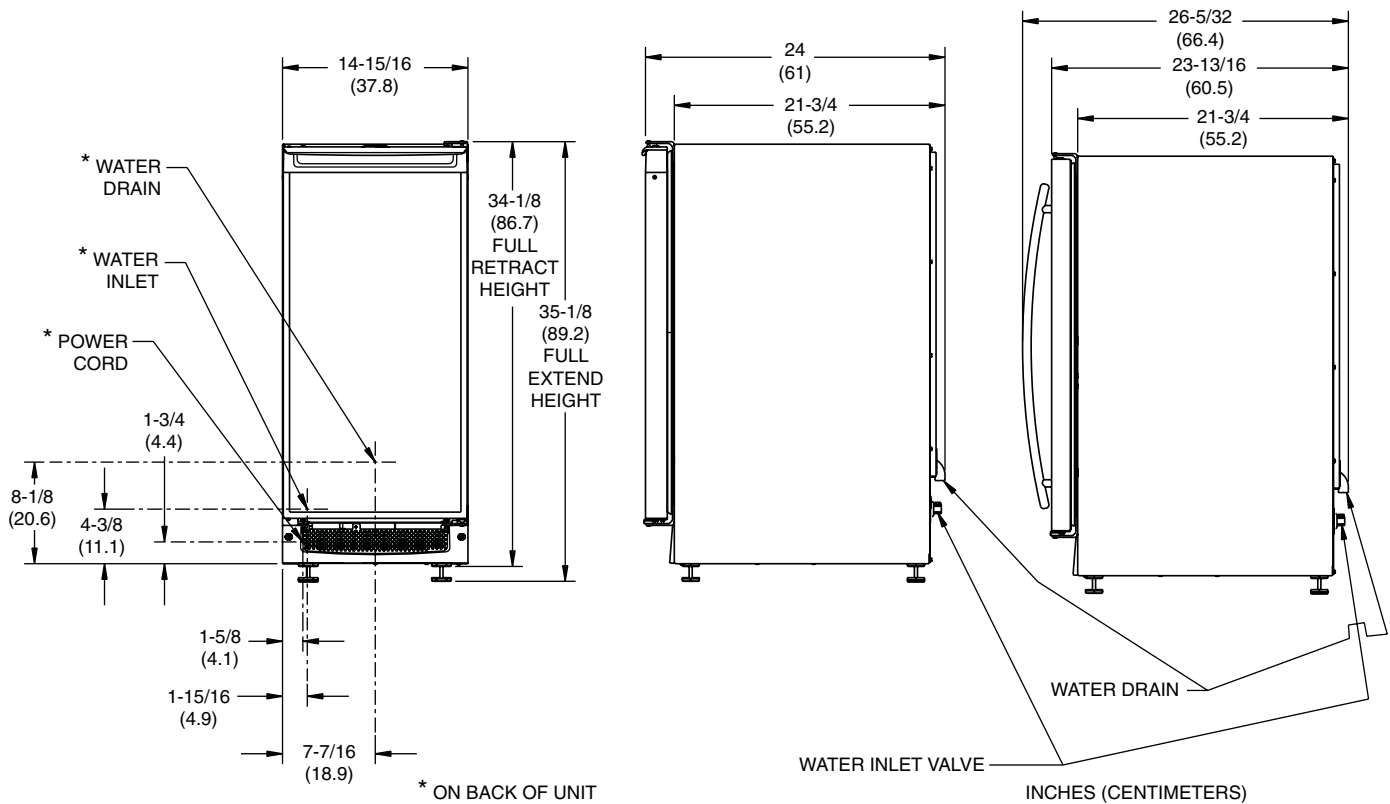

Clear Ice Maker Model CLR2160

Specifications

Shipping Weight:	
Black and White Models	109 lbs (49 kg)
Stainless Steel Models	111 lbs (50 kg)
(1) Running Amps	4.0
(1) Maximum Start-up Amps	26.5

Capacities

Refrigerator volume	N/A
Freezer volume	N/A
Approximate daily ice production	Up to 60 lbs
Ice storage	Up to 30 lbs

(1) Amps pertain to a 110/115 volt, 60 Hz electrical environment.

Approximate daily ice production up to 60 lbs dependent on ambient air temperature.

Stainless steel model must be ordered right- or left-hand hinged.

Stainless steel models: Allow 2-1/2" clearance on hinge side for 90° door opening when installed against a wall.

Water drain options:

Depending on the model, the CLR2160 may either be installed using a gravity feed drain or may come equipped with a P60 drain pump. The P60 drain pump can also be installed in the field.

- Gravity Drain:
- A 7" height from the back of the unit
 - Must have a 1/4" drop per foot of drain line
 - NO upward slopes of the drain line should occur with a gravity drain model.

P60 Drain Pump: - Fully sealed and required if pumping water UPWARD or if draining water a long distance.

Please visit www.U-Line.com for Installation Guide.

All specifications subject to change without notice.



8900 North 55th Street • Milwaukee, Wisconsin 53223
Phone: 414-354-0300 • Fax: 414-354-7905 • www.u-line.com