
## Vent A Hood

## DESIGNER SERIES WALL MOUNT RANGE HOOD

JDH/C1 Series "H" in part number indicates halogen lighting. These models not available with heat lamps.

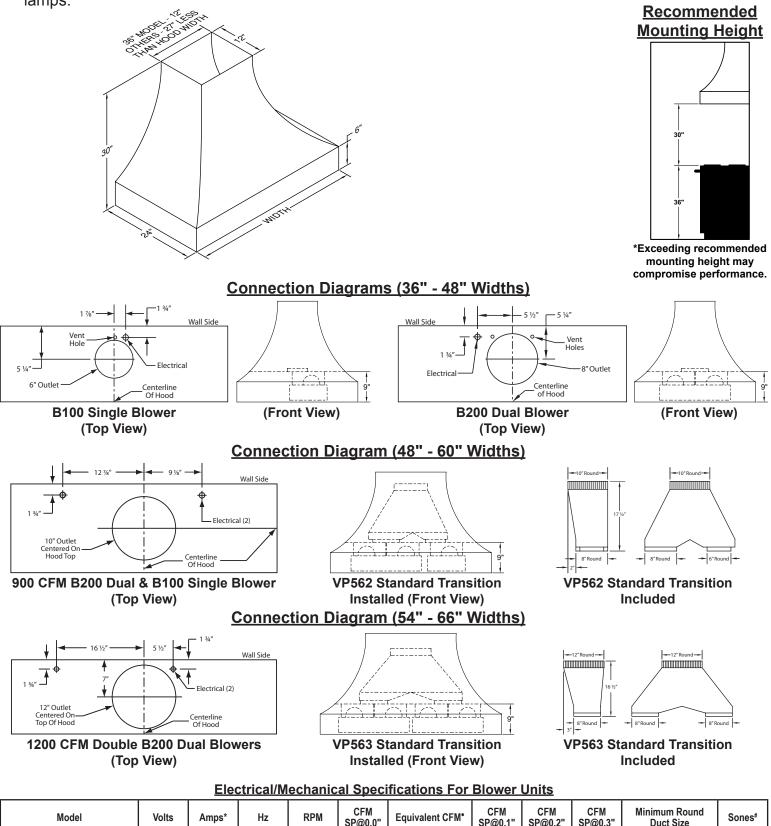

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones <sup>#</sup>
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. <sup>2</sup> )	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. <sup>2</sup> )	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. <sup>2</sup> )	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. <sup>2</sup> )	6.6
* Add 0 5 own for each holeson light Lloade one evolution to the (2 lighter 2011 All 2 lighter 2011 All 6 lighter 2011 All 6 lighter 2011											

Add 0.5 amp for each halogen light. Hoods are available with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66"). • Because the Magic Lung<sup>6</sup> blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung<sup>6</sup> blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM mucl efficiently than other than other filtration systems. When comparing the Magic Lung<sup>6</sup> with other blower units made by other manufacturers, use the "Equivalent CFM". # Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

Uı