




## AMANA® BRAND 26" BUILT-IN AIR CONDITIONERS

Through-the-Wall Design for Flush-Mount Applications  
Cooling Only or Electric Heat or Heat Pump Models

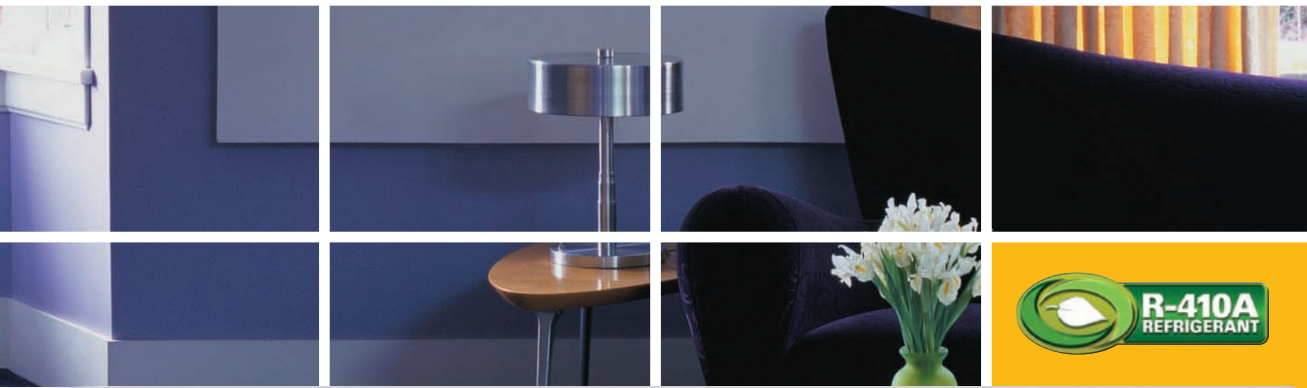

### Specifications for:

#### Cooling Models:

PBC092E00AXAA  
PBC122E00AXAA  
PBC093E00AXAA  
PBC123E00AXAA

#### Electric Heat Models:

PBE093E35AXAA  
PBE123E35AXAA

#### Heat Pump Models:

PBH092E12AXAA  
PBH093E35AXAA  
PBH113E35AXAA

## Offering total comfort with easy-to-use controls



- **ELECTRONIC TOUCH PAD WITH REMOTE CONTROL**
- **ENERGY STAR RATED**
- **HIGH ENERGY EFFICIENCY WITH MODELS UP TO 9.8 EER** saving you money when compared to lower EER models.
- **EASY REMOVABLE CONDENSER TOP** that allows for quick and complete cleaning of outdoor coils. This access for cleaning the outdoor coil enables easy removal of dirt and debris to help lengthen the life of the compressor and other sealed system

components. Six easy access screws and let the cleaning begin! Not available on competitor models!

- **EASY ACCESS SLIDE OUT FILTER** has a permanent polypropylene filter mesh that is easy to remove and clean.
- **ACCESSORY WALL SLEEVE: PBWS01A** is a solid-side, heavily insulated metal sleeve. It includes a stamped aluminum exterior grille with a weather-seal rear enclosure for installation without the chassis. The sleeve has a solid bottom for complete weather-tight installation. An optional PBWMFC can be used when a more permanent weather seal is needed for sleeves installed without the chassis.
- **100% FULL FACTORY RUN TEST** on all units for high reliability and dependability. Units start the first time – every time!

- **4-WAY ADJUSTABLE AIRFLOW** to allow for cooling or heating to any part of the room.
- **QUIET OPERATION** Designed with guest comfort in mind — providing reliable, quiet operation for years to come.

Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operational cost, or energy efficiency rating that is available from your retailer.

Heating & Air Conditioning  
**Amana**

Amana® is a trademark of Maytag Corporation or its related companies and is used under license to Goodman Company, L.P. All rights reserved.



**Cooling Only Models**

**Electric Heat Models**

**Heat Pump Models**

**Amana® brand Model**

PBC092E00AXAA

PBC122E00AXAA

PBC093E00AXAA

PBC123E00AXAA

PBE093E35AXAA

PBE123E35AXAA

PBH092E12AXAA

PBH093E35AXAA

PBH113E35AXAA



**General Features:**

Voltage	115	115	230 / 208	230 / 208	230 / 208	230 / 208	115	230 / 208	230 / 208
Approx. chassis weight	75 lbs	77 lbs	75 lbs	77 lbs	77 lbs	79 lbs	79 lbs	79 lbs	81 lbs
Approx. shipping weight	88 lbs	90 lbs	88 lbs	90 lbs	90 lbs	98 lbs	92 lbs	92 lbs	95 lbs

**Cooling:**

Capacity / BTUH	9,200	11,800	9,200 / 8,900	11,800 / 11,400	9,200 / 8,900	11,800 / 11,400	9,000	9,000 / 8,700	11,500 / 11,100
Amps	8.6	11.6	4.4 / 4.7	5.6 / 6.0	4.4 / 4.7	5.6 / 6.0	8.8	4.5 / 4.8	5.7 / 6.2
Watts	940	1,260	940 / 910	1,200 / 1,160	940 / 910	1,200 / 1,160	960	960 / 930	1,220 / 1,180
CFM	275	275	275	275	265	265	265	265	265
E.E.R.	9.8	9.4	9.8 / 9.8	9.8 / 9.8	9.8 / 9.8	9.8 / 9.8	9.4	9.4 / 9.4	9.4 / 9.4
Energy Star Qualified	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Dehumidification - pts/hr	2.5	3.4	2.5	3.4	2.5	3.4	2.5	2.5	3.4

**Electric Heat:**

Capacity / BTUH	n/a	n/a	n/a	n/a	11,000 / 9,000	11,000 / 9,000	3,900	11,000 / 9,000	11,000 / 9,000
Amps	n/a	n/a	n/a	n/a	15.0 / 14.0	15.0 / 14.0	11.0	15.0 / 14.0	15.0 / 14.0
Watts	n/a	n/a	n/a	n/a	3,500 / 2,900	3,500 / 2,900	1,150	3,500 / 2,900	3,500 / 2,900

**Heat Pump: (Reverse cycle)**

Capacity / BTUH	n/a	n/a	n/a	n/a	n/a	n/a	8,500	8,500 / 8,200	11,000 / 10,700
Amps	n/a	n/a	n/a	n/a	n/a	n/a	7.7	4.0 / 4.2	5.2 / 5.6
Watts	n/a	n/a	n/a	n/a	n/a	n/a	860	860 / 830	1,195 / 1,160
C.O.P	n/a	n/a	n/a	n/a	n/a	n/a	2.9	2.9 / 2.9	2.7 / 2.7
Adjustable changeover thermostat	n/a	n/a	n/a	n/a	n/a	n/a	Yes	Yes	Yes
Thermostatic drain valve	n/a	n/a	n/a	n/a	Yes	Yes	Yes	Yes	Yes

**Electrical Data:**

Circuit Breaker Size	5-15P	5-15P	6-15P	6-15P	6-20P	6-20P	5-15P	6-20P	6-20P
Plug type	Parallel	Parallel	Tandem	Tandem	Perpendicular	Perpendicular	Parallel	Perpendicular	Perpendicular
Power cord length	8.0' w/LCIDI	8.0' w/LCIDI	6.0' w/LCIDI	6.0' w/LCIDI	6.0' w/LCIDI	6.0' w/LCIDI	8.0' w/LCIDI	6.0' w/LCIDI	6.0' w/LCIDI

**Note:** Units ship without the optional PBWS01A wall sleeve and require a solid-side sleeve for field installation. If installing into existing sleeves, call your Amana brand sales person for compatibility assessment or adapter kits. Damage caused by improper sleeves, or by use of improper grilles, is not covered by the product warranty.


**Features: (all models)**

Agency Approval	U.L. (Underwriters Laboratory) listed; USA and Canada
Chassis Type	Slide-out for easy installation and service accessibility
Fan speeds:	2 speeds: High & Low
Energy Saver	Yes - (Cooling only - Auto fan operation )
Fan ONLY	Yes - High Speed
Exhaust CFM	300
Discharge air	Top discharge with 4-way adjustable air throw
Slide-out-filter	Top Pull-out Polypropylene - Permanent filter that is washable
Condensate drain spout	Yes - external drain spout on the PBWS01A optional wall sleeve

**Dimensions:**

	Height	Width	Depth
Chassis Dimensions:	15 5/8"	26.0"	16 7/8"
With chassis installed	Depth with chassis installed and room front cover attached = 21 7/8"		
Sleeve Cut-outs:	15 13/16"	26 3/16"	Maximum wall thickness = 16 3/8"

**Plug Type:**



**Optional Accessories:**

PBWS01A	Insulated metal sleeve for installation of 26" Built-In Air Conditioners; solid side and solid bottom with weather board and stamped aluminum grille. Color: Beige
PBAGK01TB	Architectural grille kit for use with PBWS01A sleeve and 26" Built-In Air conditioners in beige.
PBAGK01SB	Architectural grille kit for use with PBWS01A sleeve and 26" Built-In Air conditioners in custom colors
PBWMFC01A	An insulated metal cover for use when PBWS01A is installed without 26" Built-In Air Conditioner
PBFAK01A	Sleeve adapter kit; converts Fedders BSAOOC & Friedrich WSC 27" wall sleeves for use with Amana 26" Built-In Air Conditioners

**1-Year Entire Unit Limited Warranty\***

**5-Year Sealed System Limited Warranty\***

1-Year Entire Unit and 5-Year Sealed System Components. Goodman Company L.P. will repair or replace any factory defective part or sealed system leak caused by a defective part. See product warranty for complete details.

\*Complete warranty details available from your local dealer or at [www.amana-ptac.com](http://www.amana-ptac.com)



ENERGY STAR ratings are dependent upon conditions beyond equipment installation. To make certain your HVAC equipment qualifies for the ENERGY STAR designation, get complete information at [www.energystar.gov](http://www.energystar.gov).

