



Standard Features & Accessories

All models include

- Total capacity—23.9 cu. ft. (677 L) • Refrigerator - 15.0 cu. ft.
 - ° Freezer 8.9 cu. ft.
 - o 84"H./24"D.
- ProChill™ Temperature Management System
- Variable-speed DC Overdrive[™] Compressor is one of the quietest, most technologically advanced compressors available
- Electronic controls with digital temperature readouts
- Multi-channel airflow system and Odor Eliminator™ Evaporator removes odors and excess humidity
- Exclusive Plasmacluster™* Ion Air Purifier
 - Eliminates airborne bacteria and mold spores
 - Removes odors
 - Enhances food preservation
 - Never needs replacing
- Refrigerator Compartment
- Four adjustable tempered glass spillproof shelves

Model Options

- Adjustable Cold Zone™ drawer with precision ball-bearing glides
 - Separate temperature control can be set for produce or fresh meat storage
 - Quick chill option chills foods and beverages in minutes
- Adjustable Humidity Zone™ drawers with precision ball-bearing glides Humidity can be set high for leafy
 - greens or low for fruits and vegetables with skins
- Two in-the-door sealed dairy compartments with covers
- Four patented adjustable aluminum door bins with tempered glass fronts
- Top-shelf provides quick chill-down area Freezer Compartment
- Adaptive defrost
 - Three wire shelves and two slide-out baskets
 - Three patented adjustable aluminum door bins with tempered glass fronts

- Ice/Water Dispenser Through-the-door dispenser provides cubed ice, crushed ice and water in easy on-hand operation
 - Premium water filter provides cleaner water and ice supply by filtering bad tastes, odors, sediment and harmful contaminants.
- Super Clog-Resistant[™] Condenser is maintenance-free under normal use
- Tru-Flush™ design allows all models to fit flush into 24" deep installation cutout
- Open door alarm sounds and glows to warn that door has been ajar for three minutes
- Adjustable door stops standard—90°, 110°, or 120° swing
- Sabbath Mode
- *Plasmacluster is a registered trademark of Sharp Corporation.



Professional

FINISH DETAILS FOR VCSB MODEL

- Stainless Steel (SS), Black (BK), White (WH), Apple Red (AR), Biscuit (BT), Burgundy (BU), Chocolate (CH), Cinnamon (CN), Cobalt Blue (CB), Cotton White (CW), Dijon (DJ), Graphite Gray (GG), Iridescent Blue (IB), Kettle Black (KB), Lemonade (LE), Mint Julep (MJ), Plum (PL), Racing Red (RR), Sage (SA), Sea Glass (SE), Stone Gray (SG), Taupe (TP), Viking Blue (VB), Wasabi (WS).
- Finish codes designate door fronts. Stainless steel upper grille, side trim, and handles (with chrome-plated brackets); black lower kickplate.
- Brass Accent Option (BR)-nameplate and handle endcaps. Brass components have a durable protective coating for maintenance-free normal use.



FDSB5421D **Custom Panel**

FINISH DETAILS FOR FDSB MODEL

- Handles not included—opt for custom handles, or purchase a Viking Professional Series handle kit (see Installation Notes & Accessories).
- See Custom Panels section for more information and additional specifications.

ORDERING INSTRUCTIONS

First specify model number, and then color code (VCSB5421DSS). If ordering optional brass accent, specify code at end (VCSB5421DSSBR).





REFRIGERATION

Quiet Cool™ Built-In 42"W. Side-By-Side Refrigerator/Freezer with Dispenser



Please see

Installation Notes & Accessories for important information, including panel and handle kits, and water filters.

LL MODELS


Star-K Kosher Certification for use on the Jewish Sabbath or Jewish holidays

Dimensions & Specifications

PRODUCT DIMENSIONS



VCSB5421D Professional

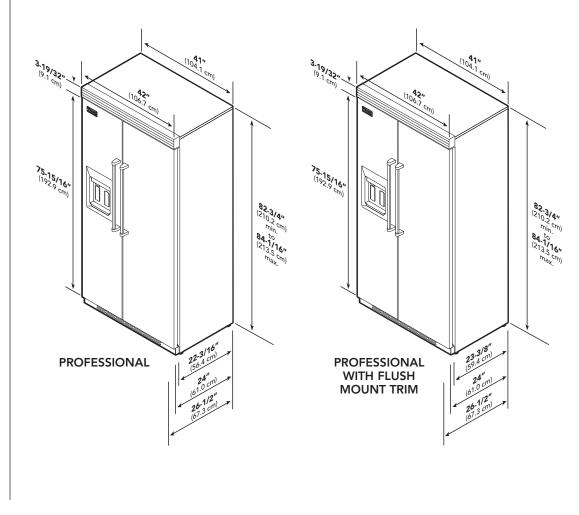

	VCSB5421D	VCSB5421D/Flush Mount
Overall width	42" (106.7	7 cm)
Overall height (from bottom)	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.	
Overall depth (from rear)		
To front edge of side trim	22-3/16" (56.4 cm)	23-3/8" (59.4 cm)
To front of top grille	24" (61.0 cm)	24" (61.0 cm)
To front of handle	26-1/2" (67.3 cm)	26-1/2" (67.3 cm)
Approx. ship weight	676 lbs. (304	I.2 kg)







Please see

Installation Notes & Accessories for important information, including panel and handle kits, and water filters.

L MODELS

Star-K Kosher Certification for use on the Jewish Sabbath or Jewish holidays


Dimensions & Specifications

PRODUCT DIMENSIONS



FDSB5421D Custom Panel

See **Custom Panels** section for more information and additional specifications.

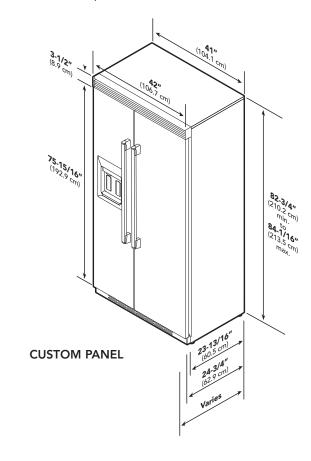

	FDSB5421D	
Overall width	42" (106.7 cm)	
Overall height (from bottom)	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.	
Overall depth (from rear)		
To front edge of side trim	23-13/16" (60.5 cm)	
To front of top grille	24-3/4" (62.9 cm)	
To front of handle	Varies	
Approx. ship weight	525 lbs. (236.2 kg)	







Dimensions & Specifications

DOOR SWING

• Adjustable door stops standard—90°, 110°, or 120° swing




VCSB5421D Professional



FDSB5421D Custom Panel

See **Custom Panels** section for more information and additional specifications.

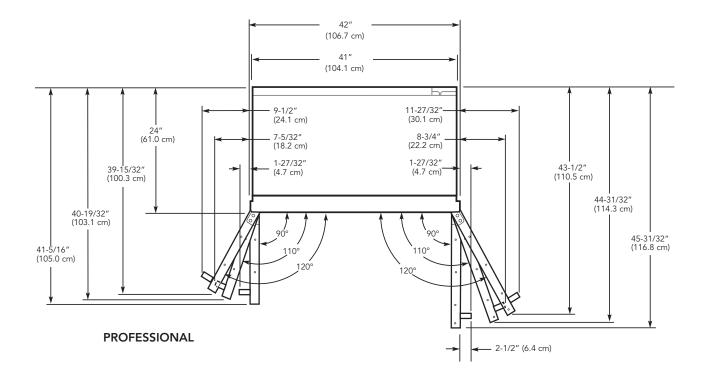


VIKING





Dimensions & Specifications

CLEARANCE DIMENSIONS—PROFESSIONAL

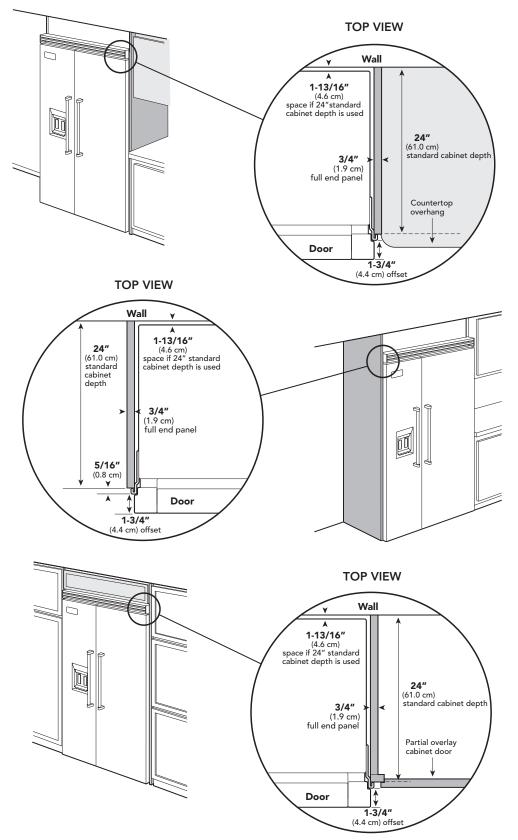








Dimensions & Specifications

CLEARANCE DIMENSIONS—PROFESSIONAL WITH FLUSH MOUNT TRIM

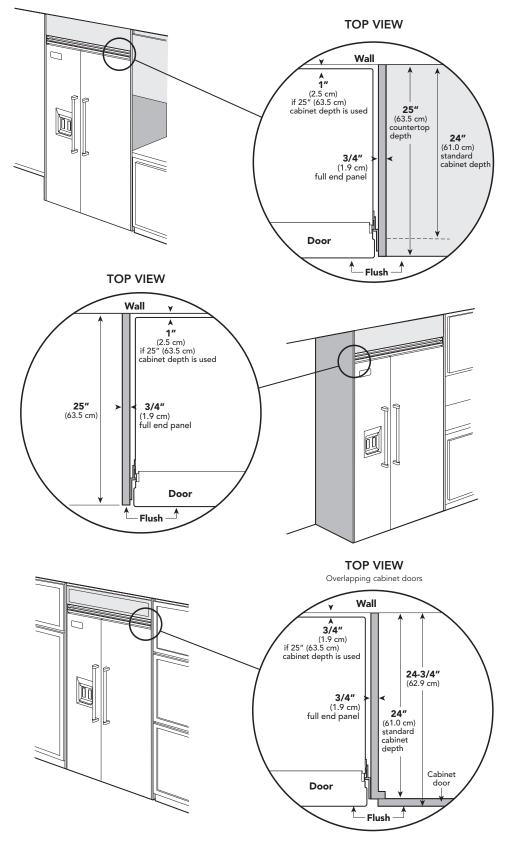





REFRIGERATION

9' (22 0

5/8,

(2.5 cm)

Quiet Cool™ Built-In 42"W. Side-By-Side Refrigerator/Freezer with Dispenser



Installation Requirements UTILITY REQUIREMENTS ACCESS REQUIREMENTS GAS NT I Not applicable NI) VCSB5421D FDSB5421D ELECTRICAL Professional **Custom Panel** • Three-wire cord See Custom Panels section for with grounded three-prong plug more information and additional attached to specifications. 24"* (61.0 cm) min product Anti-tip board ≈≈≈≈≈≈≈≈≈≈≈≠≈≈≈≠≈≈≈≈ • 115 VAC 60 Hz; 15 amp dedicat-6 (15.2 c ed circuit **9**" (22.9 cm) Maximum amp usage—9.9 Estimated energy usage— 694 kWh/year 82-7/8" (210.5 cm) min. anti-tip board a ELECTRIC OUTLET LOCATION ard a 4-1/6" ^{iti-ti}p b **73-3/8"** (186.4 cm) PLUMBING Inlet waterline requirements-1/4" copper tubing • 35 psi min.; 120 psi max. -5/0 105 5 50 *Custom panel models fit flush in 25"-deep (63.5 cm) cabinet openings. They can be installed in standard 24"-deep openings. The door faces and top grille WATER LINE ENTRY AREA will protrude 3/4" (1.9 cm) into the room. VCSB5421D VCSB5421D/Flush Mount

FDSB5421D Cutout width 41-5/8" (105.7 cm) min. to 42" (106.7 cm) 42" (106.7 cm) 41-3/4" (106.0 cm) max. Cutout height 82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max. Cutout depth 24" (61.0 cm) min.*







O Installation Notes & Accessories

Side Panel Kits

- Stainless Steel (SS)
- Panels provide finished, freestanding look; unit must still be secured to the wall
- Kit includes one panel and installation hardware

Model	Description	Approx. ship wt. lbs. (kg)
PSSPL2	Professional side panel left - Standard Mount	45 (20.2)
PSSPR2	Professional side panel right - Standard Mount	45 (20.2)
DSSPL2	Designer side panel left - Flush Mount	45 (20.2)
DSSPR2	Designer side panel right - Flush Mount	45 (20.2)

Side Panel Hardware Kit

- For use with custom panel built-in refrigerator/freezers
- Hardware allows installation of custom side panels
- Kit includes brackets, screws, and installation instructions to mount panels on left and right side

Model	Description	Approx. ship wt. lbs. (kg)
SPHKDS	Side panel hardware	3 (1.4)

Top Panel Kit

- Stainless Steel (SS)
- Panel provides finished, freestanding look; unit must still be secured to the wall
- Kit includes one panel and installation hardware

Model	Description	Approx. ship wt. lbs. (kg)
TOP-42	42"W. top panel	23 (10.4)

Handle Kits

- For use with custom panel refrigerator/freezers
- For use on locally supplied custom panels
- Handles allow refrigerator/freezers with custom panels to coordinate with other Professional products
- Kit includes two handles and installation hardware

Model	Description	Approx. ship wt. lbs. (kg)
PHK-DFSB5-SS	Professional handles (Stainless Steel)	10 (4.5)

Replacement Water Filter

- Reduces sediment, taste, and odor
- Reduces cysts, particulates, turbidity, lead, chlorine, atrazine, and lindane
- NSF-certified
- Ready to install—no assembly required
- Replacement recommended every nine months

Model	Description	Approx. ship wt. lbs. (kg)
RWF-DISP	Replacement water filter	5 (2.3)

Compliance Information

WARRANTY SUMMARY*

- Three-year full warranty—complete unit
- Six-year full warranty—sealed refrigeration system
- Twelve-year limited warranty—sealed refrigeration system (includes compressor, condenser,
- dryer/strainer, evaporator, and connecting tubing)
- Ninety-day limited warranty-cosmetic parts such as glass, painted, and decorative items

*For complete warranty see Use & Care Guide. Warranty valid on Viking products shipped within the United States and Canada.

