

# D5534ADAFI

Type: Fully integrated  
Colors: Fully Integrated (FI) model  
accommodates a selection of accessory  
door panels or customer supplied custom  
wood panel.

## PERFORMANCE

Capacity: 14 place settings  
Noise level 48 dB(A)  
7Spray™ system  
PowerZone™ Pots & Pans, PowerZone™ Cutlery

## PROGRAMS

Heavy	Normal
Daily	Quick
Super Quick	Delicate
Eco	Rinse & Dry
Rinse & Hold	
Super Quick program in 15 minutes!	

## FEATURES

7 Temperatures, Turbo drying™, Delayed start  
1-24h, Hidden control, LCD display,  
Uses as little as 2.6 gals of water in Quick wash,  
Energy Star rated, Fits into opening as low as 32  
1/4" height, 2 Plus 1 warranty

## FLEXIRACKS™

Premium upper rack accommodates:  
- 9" items  
- Fold-down stemware shelves  
- High-side design to protect dishes and glasses  
Exclusive lower rack accommodates:  
- 13 3/4" dishes  
- Fold-down tines for storage flexibility  
- Wide tine design for large bowls and platters  
- Upper & lower rack handles  
Cutlery basket



MADE IN  
SWEDEN



Asko Appliances, Inc

PO BOX 940609 • Plano • Texas • 75094

Phone 800.898.1879

[www.askousa.com](http://www.askousa.com)

# ADA TALL TANK MODELS

## Planning & Design: ADA Dishwashers


### D5424ADA, D5534ADAFI, D5634ADAHS

#### Unit Dimensions

	US	METRIC
HEIGHT:*	32 1/4" – 34"	819 – 864 mm
WIDTH: 5424ADA, 5634ADAHS	24"	610 mm
5534ADAFI	23 5/8"	600 mm
DEPTH:	22 7/8"	581 mm
DEPTH W/HANDLE: 5634ADAHS	24 7/8"	632 mm
DEPTH W/DOOR OPEN:	48 3/8"	1229 mm
WEIGHT: 5424ADA, 5634ADAHS	106 lbs	48 kg
5534ADAFI	94 lbs	43 kg

#### Technical Data

Electricity	120 V, 60 Hz, 15 Amp
Water pressure	18-176 psi
Heating element	1200 watt
Max loading	1300 watt

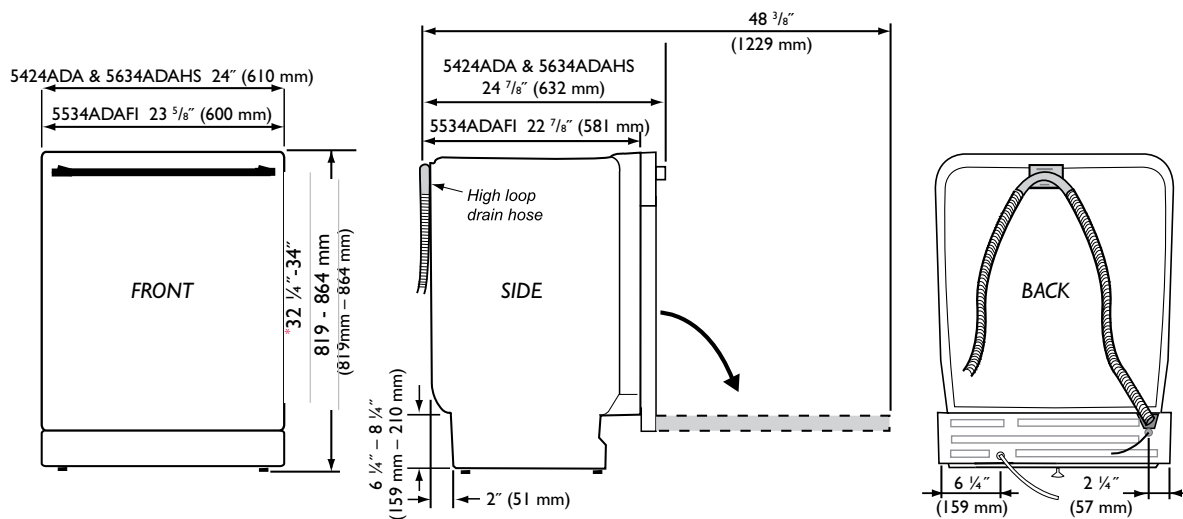

#### Cutout Dimensions

	US	METRIC
HEIGHT:	32 1/4" – 34"	819 – 864 mm
WIDTH: 5424ADA, 5624ADAHS	24"	610 mm
5534ADAFI	23 5/8" – 24"	600 – 610 mm
DEPTH: 5233ADAHS, 5233ADAFI	22 7/8"	581 mm

Depth includes space for the high-loop drain hose

The electrical and water supplies should enter through the area indicated by the shaded area. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 2" (51 mm) in diameter.

\* 32 1/4" / 819 mm height requires removal of top trim & lower side trim (2)

