

FS22LCSS

20.18" x 17.38" x 19.0" (H x W x D)

Compact all-freezer in stainless steel with lock, capable of -20°C operation

Highlights:

-20° C capable for long-term storage of frozen food, vaccines, and other laboratory products

Seamless interior liner simplifies cleanup

Fully wrapped in stainless steel


Factory-installed lock provides security you can count on



| | |
|--------------------------|---|
| Stainless steel exterior | Cabinet and door are wrapped in 304 grade stainless steel for lasting durability with a professional appearance |
| Factory installed lock | Keyed lock for a secure interior |
| -20° C capable | Operates at safe temperature for storage of vaccines such as FLU MIST and chicken pox |
| Manual defrost | No temperature fluctuations with a manual defrost system that keeps the cold inside |
| Reversible door | Keep your options flexible with a reversible door that is easy to switch when your arrangement changes |
| Adjustable thermostat | Rear mounted to prevent accidental adjustments |
| Removable shelf | Wire shelf for storage convenience |
| One piece interior liner | Easy clean-up with a seamless liner that won't hold a mess in hidden crevices |
| 100% CFC free | Environmentally friendly design without ozone-damaging chemicals |

Specifications:

| | |
|----------------------------|----------------|
| Height | 20.18" |
| Width | 17.38" |
| Depth | 19.0" |
| Capacity | 1.42 cu.ft. |
| Interior Height 1 | 14.63" |
| Interior Width 1 | 12.38" |
| Interior Depth 1 | 14.5" |
| Comp Step Height | 7.0" |
| Comp Step Width | 12.38" |
| Comp Step Depth | 6.0" |
| Shipping Weight | 55.0 lbs. |
| Weight | 40.0 lbs. |
| Canadian Electrical Safety | CSA |
| US Electrical Safety | CSA |
| Amps | 1.2 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Energy Usage/Year | 272.0 kWh/year |
| Reversible | Yes |
| Door Swing | RHD |
| Shelf Quantity | 1 |
| Shelf Type | Wire |
| Defrost Type | Manual |
| Height to Hinge Cap | 20.5" |
| Thermostat Type | Dial |
| Level Legs Quantity | 2 |
| High Side PSI | 270.0 |
| Freon Type | R134a |
| Low Side PSI | 103.0 |
| Freon Oz | 1.67 |
| Parts/Labor Warranty | 1 Year |
| Compressor Warranty | 5 Years |

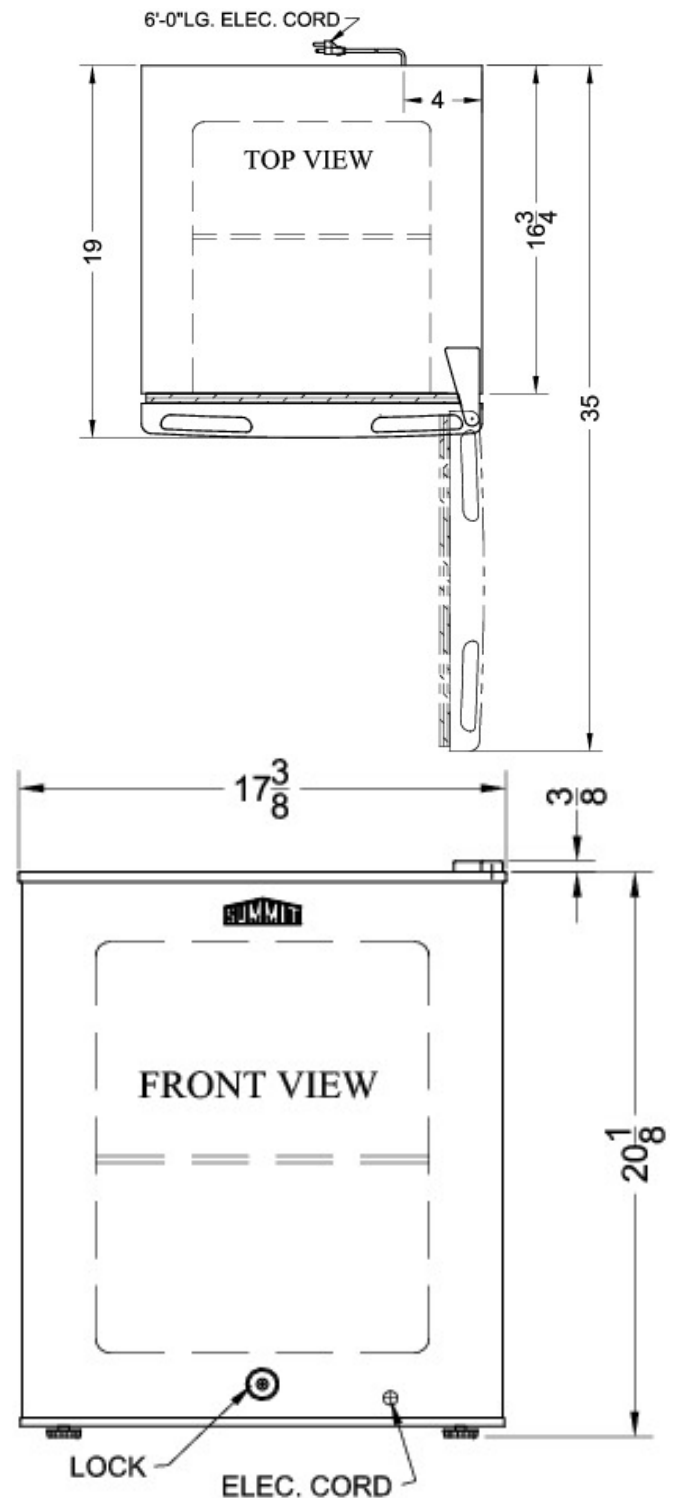

Summit Appliance Division, Felix Storch, Inc.
 770 Garrison Ave • Bronx, NY 10474
 Phone: 718-893-3900 • Fax: 718-842-3093
 Email: info@summitappliance.com