



Nothing compares to the quality of our commercial grade 304 stainless steel construction featuring welded seamless corners.



Pro - Line without SOLAROD



Pro - Line without SOLAROD

### Blower Options Available:

Internal - 600 CFM or 1200 CFM

In-Line - 600 CFM, 1000 CFM, or 1200 CFM  
1600CFM

Remote - 1000 CFM, 1200 CFM, 1600 CFM  
2000 CFM, or 2500 CFM

### Accessories Available:

- Stainless Steel or Brass Utensil Rails
- Custom Duct Covers
- Wall Switch Kit

### Pro Line Hoods Include:

- Available with or without SOLAROD
- Commercial Grade 304 SS Construction
- Welded Seamless Corners
- Dishwasher Safe SS Baffle Filters
- Variable Fan Control
- Halogen Lamps with Dimmer Control
- Reversible Top or rear exhaust
- Largest Filtered Capture area in Industry

### Available Models

#### Without SOLAROD

PL36240 Pro-Line 36"W x 24"D x 18"H

PL42240 Pro-Line 42"W x 24"D x 18"H

PL48240 Pro-Line 48"W x 24"D x 18"H

#### With SOLAROD

PL36270 Pro-Line 36"W x 27"D x 18"H

PL42270 Pro-Line 42"W x 27"D x 18"H

PL48270 Pro-Line 48"W x 27"D x 18"H



PL60270 Pro-Line 60"W x 27"D x 18"H

### Electrical Requirements


- 15 amps at 120 volts
- Light Bulbs are PAR 16-60 watt halogen
- Bulbs are operated by a dimmer switch
- \* Blowers must be purchased separately.




Nothing compares to the quality of our commercial grade 304 stainless steel construction featuring welded seamless corners.

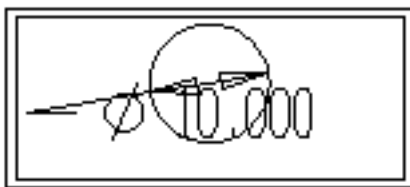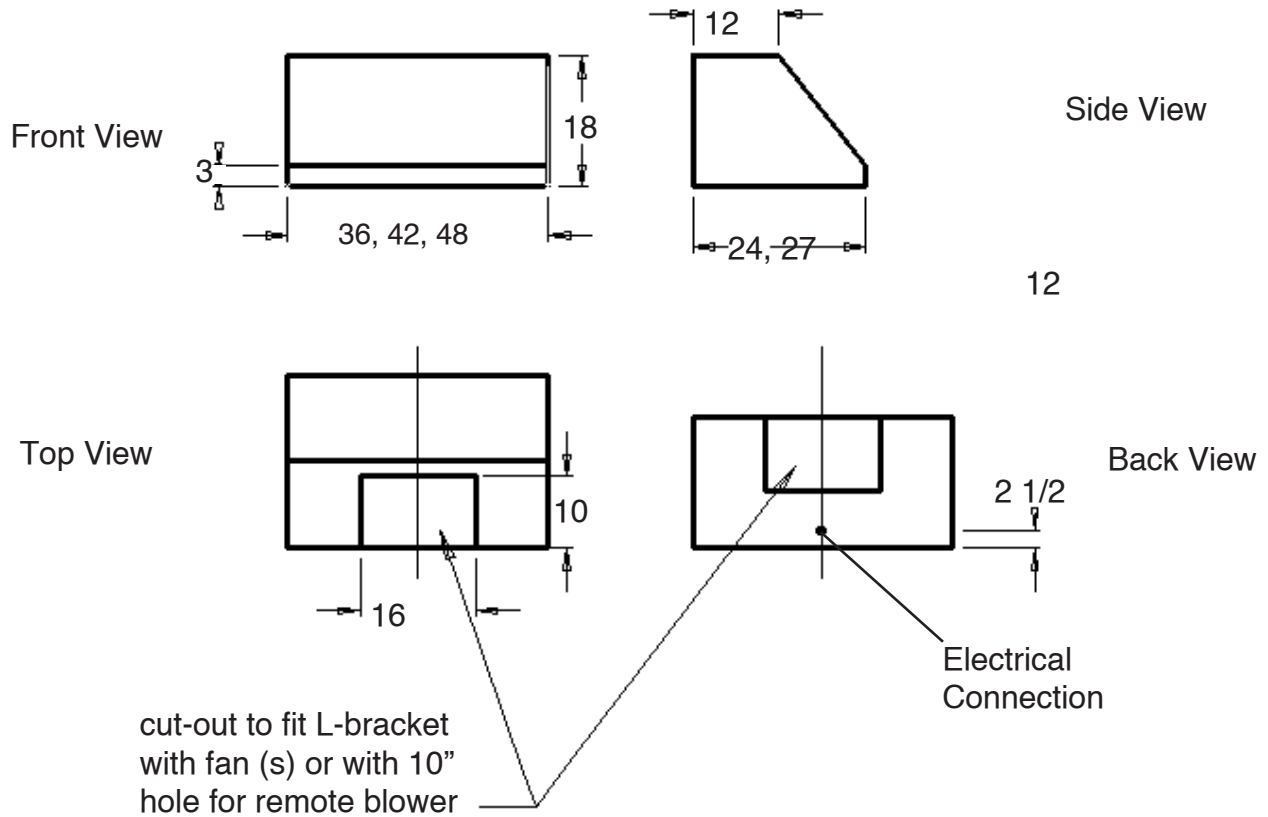

Remote Blower

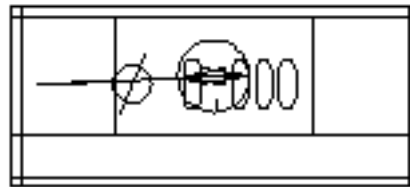

600 CFM Blower

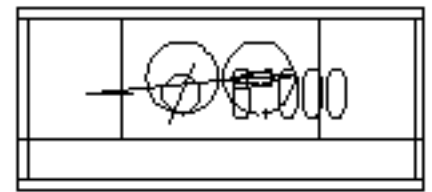

1200 CFM Blower  
 w/ TR6x15/8 Transition  
 Required

### Additional Information

- Blower Specification Information (See Above)
- PL Specification remains the same with or without SOLAROD application. Allowances are noted above.
- Wall Switch Available
- Custom Duct Covers Available
- Potrails Available