DWHD650JFP SAPPHIRE® 6-PROGRAM DISHWASHER PROFESSIONAL SERIES HANDLE





Also Available In:

DWHD650JFM - Flat Stainless Steel Panel with Masterpiece® Series Handle DWHD650JPR - Custom Panel

FEATURES & BENEFITS

- ★ Sapphire Glow[®] light illuminates with the sparkling blue light when the dishwasher is open
- ★ Blue PowerBeam[®] operating indicator lets you know when dishwasher is running
 - Flexible 3rd rack delivers added loading capacity as well as adjustability to accommodate larger or smaller items, wider ends and utensil handles
 - Flexible folding tines fold down to accommodate larger pots, pans, and dishes and add flexibility to hold items twice as wide as previous models and significantly wider than competitor
 - Crystal $\mathsf{Protect}^{\circledast}$ system adjusts the water softness during the cycle for perfectly clear crystal, free of water spots

ACCESSORIES (OPTIONAL)	
Dishwasher Softener Salt (4.4 lbs)	SGZ9091UC
Dishwasher Supply and Drainage Hose Extension 76 3/4 "	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Fine Silverware Carafe	SMZ5002UC





Accessory Kit includes Extra-tall-item Sprinkler, Vase / Bottle Holder, 3 Plastic Item Clips and Small Item Basket

Fine
Silverware
Carafe

GENERAL PROPERTIES	
Number Of Wash Cycles	6
Number Of Options	5
dBA	42
Third Rack	Flexible
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Control Type	Buttons
Concealed Heating Element	Yes
Leak Protection System	24/7 AquaStop® Plus
Water Softener	Yes
Five-Level Wash	Yes
Childlock	No
EFFICIENCY	
Water Usage Per Cycle (g)	2.2 g
Energy Efficiency Class	Tier 1
ENERGY STAR [®] Qualified	Yes
Total Annual Energy Consumption (kWh)	260 kWh
Total Annual Water Consumption (g)	613 g
CAPACITY	
Number Of Place Settings	14
TECHNICAL DETAILS	
TECHNICAL DETAILS Watts (W)	1,300 W
	1,300 W 12 A
Watts (W)	
Watts (W) Current (A)	12 A
Watts (W) Current (A) Volts (V)	12 A 120 V
Watts (W) Current (A) Volts (V) Frequency (Hz)	12 A 120 V 60 Hz
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in)	12 A 120 V 60 Hz 47 1/4"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (Ib/sin)	12 A 120 V 60 Hz 47 1/4" 7
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake	12 A 120 V 60 Hz 47 1/4" 7 140° F
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in)	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in)	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8" 55 1/8" 34 1/16" × 23 9/16" ×
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in)	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8" 55 1/8" 34 1/16" × 23 9/16" × 22 7/16"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in)	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8" 55 1/8" 34 1/16" × 23 9/16" × 22 7/16" 34 1/8" × 24" × 24"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in) Adjustable Feet	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8" 55 1/8" 34 1/16" × 23 9/16" × 22 7/16" 34 1/8" × 24" × 24" Yes
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in) Adjustable Feet Net Weight (lbs)	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8" 55 1/8" 34 1/16" × 23 9/16" × 22 7/16" 34 1/8" × 24" × 24" Yes
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in) Adjustable Feet Net Weight (Ibs) ACCESSORIES (INCLUDED)	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8" 55 1/8" 34 1/16" × 23 9/16" × 22 7/16" 34 1/8" × 24" × 24" Yes
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in) Adjustable Feet Net Weight (lbs) ACCESSORIES (INCLUDED) Baking-Sheet Spray Head Grey	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8" 55 1/8" 34 1/16" × 23 9/16" × 22 7/16" 34 1/8" × 24" × 24" Yes
Watts (W)Current (A)Volts (V)Frequency (Hz)Power Cord Length (in)Minimum Water Pressure (lb/sin)Max. Temperature for Water IntakeLength Inlet Hose (in)Length Outlet Hose (in)DIMENSIONS & WEIGHTOverall Appliance Dimensions (HxWxD) (in)Required Cutout Size (HxWxD) (in)Adjustable FeetNet Weight (lbs)ACCESSORIES (INCLUDED)Baking-Sheet Spray Head GreyWARRANTY	12 A 120 V 60 Hz 47 1/4" 7 140° F 55 1/8" 55 1/8" 34 1/16" × 23 9/16" × 22 7/16" 34 1/8" × 24" × 24" Yes 104 lbs

***** THERMADOR EXCLUSIVE

Rack Components); Parts Only

Liner; Parts Only


Limited Warranty for Rust-through On Inner Tub

Lifetime

DWHD650JFP SAPPHIRE® 6-PROGRAM DISHWASHER PROFESSIONAL SERIES HANDLE



DISHWASHER & CUTOUT DIMENSIONS

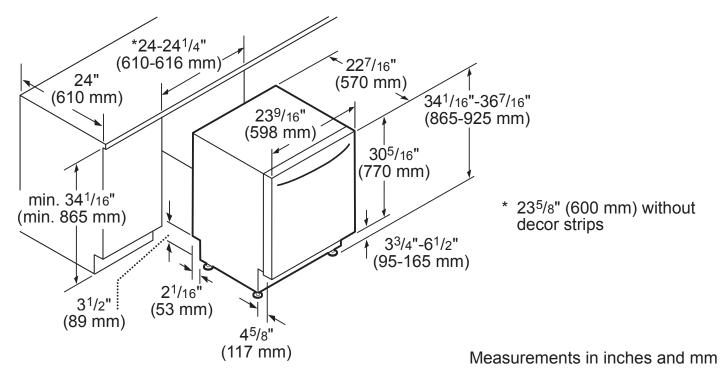

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2015 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.