

D5534XLFI

Type: Fully integrated
Colors: Fully Integrated (FI) model
accommodates a selection of accessory
door panels or customer
supplied custom wood panel

PERFORMANCE

Capacity: 14 place settings
Noise level 48 dB(A)
7Spray™ system
PowerZone™ Pots & Pans, PowerZone™
Cutlery

PROGRAMS

Heavy	Normal
Daily	Quick
Super quick	Delicate
Eco	Rinse and dry
Rinse & hold	

FEATURES

7 Temperatures, Turbo drying™, Delayed start
1-24h, Guaranteed wash and rinse temperatures,
Energy Star Rated, 2 year warranty

FLEXIRACKS™

Premium upper rack accommodates:
- 9" tall items
- Adjustable stemware shelves (2)
Exclusive lower rack accommodates:
- 12" tall items
Cutlery basket



Asko Appliances, Inc

PO BOX 940609 • Plano • Texas • 75094

Phone 800.898.1879

www.askousa.com

XL TALL TANK MODELS

PLANNING & DESIGN: XL DISHWASHERS


D5424XL, D5524XLFI, D5534XLFI, D5624XLCS, D5634XLHS, D5644XLCS

Unit Dimensions

	US	METRIC
HEIGHT:*	32 1/4" – 34 3/8"	819 – 873 mm
WIDTH: 5424XL, 5624XLCS 5634XLHS & 5644XLCS 5524XLFI, 5534XLFI	24"	610 mm
DEPTH:	22 7/8"	581 mm
DEPTH W/HANDLE:	24 7/8"	632 mm
DEPTH W/DOOR OPEN:	47 1/2"	1207 mm
WEIGHT: 5424XL, 5624XLCS, 5634XLHS & 5644XLCS	106 lbs	48 kg
5524XLFI, 5534XLFI	94 lbs	43 kg

Technical Data

Electricity	120 V, 60 Hz, 15 Amp
Water pressure	4.2 – 140 psi
Heating element	1200 watt
Max loading	1300 watt

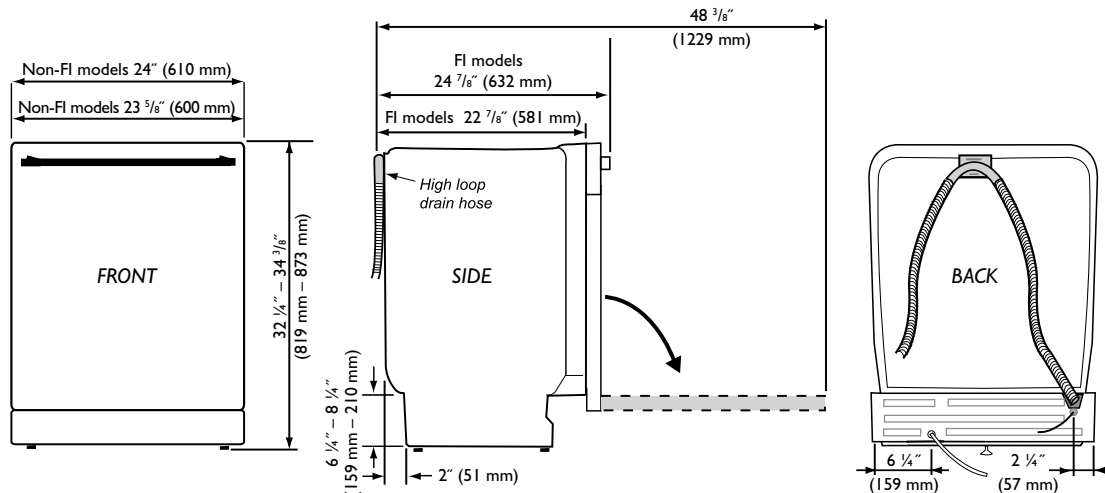

Cutout Dimensions

	US	METRIC
HEIGHT:	32 1/4" – 34 1/2"	819 – 873 mm
WIDTH: 5424XL, 5624XLCS, 5634XLHS & 5644XLCS 5524XLFI, 5534XLFI	24"	610 mm
DEPTH:	23 5/8" – 24"	600 – 610 mm
	24"	510 mm

Depth includes space for the high-loop drain hose

The electrical and water supplies should enter through the area indicated by the shaded area. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 2" (51 mm) in diameter.

* 32 1/4" / 819 mm height requires removal of top trim & lower side trim (2)

