

## D5524XLFI

Type: Fully integrated Colors: Fully Integrated (FI) model accommodates a selection of accessory door panels or customer supplied custom wood panel

#### **PERFORMANCE**

Capacity: 14 place settings
Noise level 50 dB(A)
7Spray<sup>™</sup> system
PowerZone<sup>™</sup> Pots & Pans, PowerZone<sup>™</sup> Cutlery

#### **PROGRAMS**

Heavy Normal Daily
Quick Super Quick Delicate
Eco Rinse & Dry Rinse & Hold
Super Quick program in 15 minutes!

#### **FEATURES**

7 Temperatures, Condensation dry, Hidden control, LCD display, Uses as little at 2.6 gals of water in Quick wash, Energy Star rated, 2 year warranty, ADA compliant, Fits into opening as low as 32 ¼" height

#### FLEXIRACKS™ (SEE PAGE 20)

Standard upper rack accommodates:

- 9" items
- Height-adjustable stemware shelf
- High-side design to protect dishes and glasses Premium lower rack accommodates:
- 12" dishes Cutlery basket





Asko Appliances, Inc

PO BOX 940609 • Plano • Texas • 75094

Phone 800.898.1879

### XL TALL TANK MODELS

#### **PLANNING & DESIGN:** XL DISHWASHERS


#### D5424XL, D5524XLFI, D5534XLFI, D5624XLCS, D5634XLHS, D5644XLCS

#### **Unit Dimensions**

		US	METRIC
HEIGHT:*		32 ¼" – 34 ³/8"	819 – 873 mm
WIDTH:	5424XL, 5624XLCS 5634XLHS & 5644XLCS	24″	610 mm
	5524XLFI, 5534XLFI	23 5/8"	600 mm
DEPTH:		22 <sup>7</sup> /8"	581 mm
DEPTH V	V/HANDLE:	24 <sup>7</sup> /8"	632 mm
DEPTH V	V/DOOR OPEN:	47 ½″	1207 mm
WEIGHT	: 5424XL, 5624XLCS, 5634XLF & 5644XLCS	HS 106 lbs	48 kg
	5524XLFI, 5534XLFI	94 lbs	43 kg

#### **Technical Data**

Electricity	120 V, 60 Hz, 15 Amp
Water pressure	4.2 – 140 psi
Heating element	1200 watt
Max loading	1300 watt

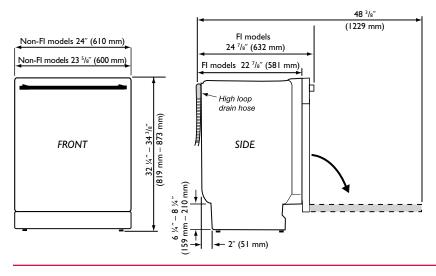




#### **Cutout Dimensions**

	US	METRIC	
HEIGHT:	32 ¼" – 34 ½"	819 – 873 mm	
WIDTH: 5424XL, 5624XLC	CS, 24"	610 mm	
5634XLHS & 5644	5634XLHS & 5644XLCS		
5524XLFI, 5534XI	LFI 23 <sup>5</sup> / <sub>8</sub> " – 24"	600 – 610 mm	
DEPTH:	24″	510 mm	

Depth includes space for the high-loop drain hose

The electrical and water supplies should enter through the area indicated by the shaded area. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 2" (51 mm) in diameter.

\* 32 ¼" / 819 mm height requires removal of top trim & lower side trim (2)





# ASKO ADA Compliant Dishwashers Dishwasher D5524XLFI

## Image not available!

#### D5524XLFI

Type: Built-in

Noise Level 50 dB(A)

Color: Panel Ready (FI) model accomodates a selection of accessory door panels or customer supplied custom wood panel PERFORMANCE Capacity: 14 place settings ADA Height Compliant

7Spray™ System, PowerZone™ Pots & Pans, PowerZone™ Cutlery, Guarenteed

Water Temperatures PROGRAMS

Heavy Normal

Daily

Quick Super quick Delicate

Eco

Rinse and dry Rinse & hold

Super Quick program in 15 Minutes!

FEATURES: 7 Temperatures Condensation dry Hidden control LCD Display Uses as little as 2.6 gals of water in Quick wash

Energy Star rated

2 Years Limited Warranty - Parts & Labor Protection FLEXIRACKS™

Standard upper rack accommodates:

- 9" items
- Height-adjustable stemware
- High-side design to protect the dishes and glasses Premium lower rack accommodates:
- 12" dishes
- Cutlery basket

## Technical specifications - Dishwasher D5524XLFI

PROGRAMMING OPTIONS:					
Number of programs	9				
CONSUMPTION:					
Average water usage (gal)	2.6 Quick Wask				
OTHER FEATURES:					
Noise level dB(A)	50				
OTHER FEATURES:					
Product group	Dishwasher				
Child safety devices	KidSafe™				
Construction type	Built-in				
Daily wash	Yes				
Delicate	Yes				
Drying optional	Yes				
Eco	Yes				
Heavy wash	Yes				
Normal wash	Yes				
Number of place settings	14				
Quick wash	Yes				
Rins and hold	Yes				
Rinse and dry	Yes				
Super quick	Yes				
Temperature	Yes				
Type of control	Electronic				