

DISPLAY

AVAILABLE COLORS




White



Silver



Black

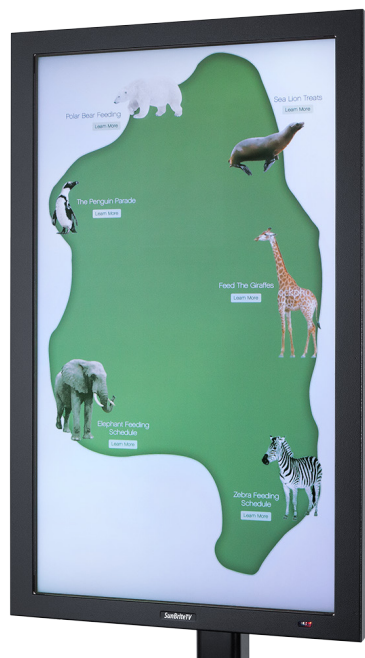

SHOWN IN BLACK

KEY FEATURES

- 55" Marquee Series True Outdoor All-Weather Digital Signage Display.
- Dispersive Signal (3-M Microtouch) Touch Screen Technology.
- Portrait installation only, for landscape installation use DS-5507TSL.
- Direct Sunlight-Readable 700 NIT LCD screen.
- High temperature Enhanced Solar Tolerance (EST) technology prevents isotropic blackout.
- Exterior designed to protect internal components from rain, dust, insects, salt air.
- Multi-fan airflow system keeps the unit cool and dry in temperatures up to 122 degrees F.
- Ability to operate in cold weather (-40 degrees F).
- Front tempered anti-reflective glass window provides added protection to LCD screen, and safeguards against vandalism and abuse.
- Full command control, RS232 and Discrete IR located in cable-entry compartment.
- Innovative water-tight Cable Entry System seals out moisture and allows for easy hook-ups.
- Internal media compartment to house DMP, Pro:Idiom boxes, or fan-less PC's (optional).
- Powder-coated aluminum exterior.
- Weatherproof detachable 20W speaker module.
- Weatherproof remote control, weatherproof control buttons.

| | | |
|--------------------------------------|--|--|
| <p>SCREEN</p> | <p>LCD SCREEN 55-inch diagonal TFT Active Matrix</p> <p>RESOLUTION 1920 x 1080 Full-HD 1080p</p> <p>ASPECT RATIO 16:9</p> <p>SCREEN ORIENTATION Landscape Mode</p> <p>CONTRAST RATIO 5000:1</p> <p>FRAME RATE 120 Hz</p> | <p>SCREEN BRIGHTNESS 700 NIT</p> <p>TOUCH SCREEN TECHNOLOGY 3M Dispersive Signal Technology - single touch</p> <p>VIEWING ANGLE 176° x 176°</p> <p>RESPONSE TIME 10.0 milliseconds</p> <p>TV FORMATS 1080p, 1080i, 720p, 480p, 480i</p> |
| <p>CONNECTIONS</p> | <p>RF Antenna/CATV (ATSC/QAM/NTSC) x1</p> <p>HDMI HDMI™ Input x2</p> <p>VIDEO COMPOSITE S-Video x1, Composite Video x1, L/R Audio Inputs x1</p> <p>VIDEO COMPONENT YPbPr plus Stereo Audio x2</p> <p>PC 15-pin D-sub VGA plus Stereo Audio</p> | <p>CONTROL SET RS232 Serial, Discrete IR Control, Concealed IR Window</p> <p>AUDIO OUT SPDIF Audio, Analog 1/8" headphone jack</p> <p>SPEAKERS 20 WATT detachable speaker module (optional)</p> <p>INPUT POWER 100-240 VAC, 50-60 Hz 4.0 A Max</p> |
| <p>TEMPERATURE TOLERANCES</p> | <p>OPERATING TEMP -40° to 122° F. (-40° to 50°C.)</p> <p>NON-OP. TEMP -40° to 140° F. (-40° to 60°C.)</p> <p>(OFF MODE WITH POWER APPLIED) The non-operating temperature feature requires power to be applied.</p> | |
| <p>PHYSICAL SPECS</p> | <p>ACCESSORIES INCLUDED Weatherproof remote control</p> <p>EXTERIOR Powder-coated aluminum</p> <p>EXTERIOR COLORS Black, Silver, White</p> <p>TV DIMENSIONS 52.46"W x 31.44"H (33.60" with optional speaker module) x 7.14"D</p> <p>TV WEIGHT 115.0 lbs.</p> | <p>SHIPPING DIMENSIONS 60.0"W x 46.0"H x 13.0"D</p> <p>SHIPPING WEIGHT 134.5 lbs.</p> <p>RESIDENTIAL WARRANTY Two-year parts and labor</p> <p>COMMERCIAL WARRANTY Two-year parts and labor</p> |