

## SCR33 - Companion Refrigerator

### Companion Refrigerator



### Refrigerator Features


- 15" cabinet width
- Capacity for 49, 12 oz. bottles or 88, 12 oz. cans.
- Two adjustable in-door storage shelves.
- Three adjustable tempered glass shelves for versatility.
- Adjustable temperature control.
- Field reversible door.
- Accepts locally supplied custom wood front.
- Automatic defrost.
- Adjustable leveling legs.
- Perfect match with Scotsman Ice Machine or Wine Storage Unit.



### Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

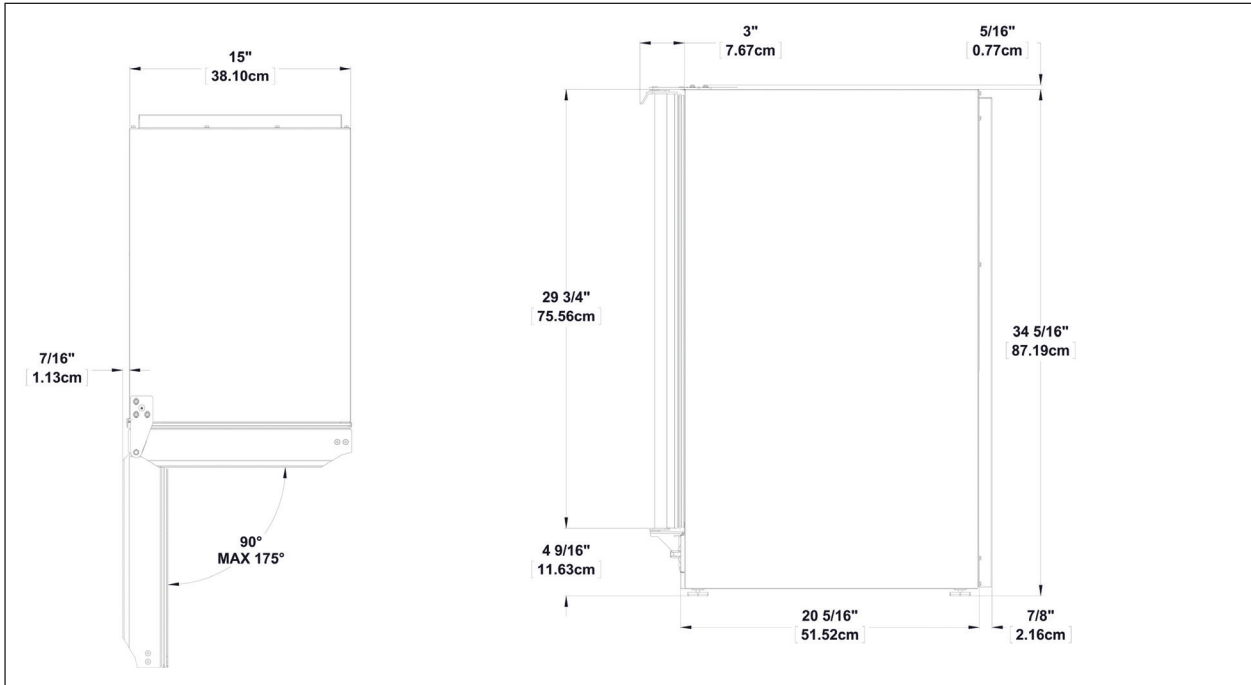

## All Models

Storage Capacity:  
3.0 cu. ft.

Condenser Type:  
Air

Basic Electrical:  
(Volts/Hz/Phase)  
115/60/1

Amps:  
1.08

Maximum Fuze Size:  
15

Refrigerant:  
R-134A

Dimensions (W x D x H):  
Unit (without legs):  
15" x 23.5" x 34.25"  
(38.1 x 59.69 x 87 cm)

Shipping Carton:  
17.5" x 26" x 36"  
(44.5 x 66.0 x 91.5 cm)

## Specifications

Model	Finish Cabinet / Front	Shipping Weight lb / kg
SCR33-1BA	Black / Black	81 / 37

## Accessories

Model	Description	Shipping Weight lb / kg
KHAND-SCR	Custom Handle Trim Piece (Top)	1 / 0.45
KSS-SCR	Stainless Steel Front Panel Kit	9 / 4

## Operating Requirements

	Minimum	Maximum
<b>Air Temperatures</b>	50°F (10°C)	100°F (38°C)
<b>Electrical Voltage</b>	-10%	+10%

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Scotsman products, except model SCCG50MA-1SS & SCCP5050MA-1SS, are not designed for outdoor installations nor for installation where air temperatures fall below 50°F. or exceed 100°F., nor where water temperatures fall below 40°F. or exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.