



800-299-9470

Tankless Water Heater

EP18WI30L S

Liquid Propane





Remote



Endless Hot Water

Hot water when you need it, for as long as you need it. That means no storage or shortage of hot water.



Energy Efficient

More energy efficient than standard gas tank water heaters.



Compact Space Savings

With their smaller, compact size and wall-mounted installation, tankless hot water heaters take up significantly less room than traditional tank water heaters.



Premium Stainless Steel


Durable, premium stainless steel exterior.

Control Panel Features	
Hard-Wired Remote	Yes
Lockout	Yes
LED Digital Display	Yes
Flow Rate Display Mode	G/L
Temperature Display Mode	°F / °C
Danfarmana	
Performance	0.00
Energy Factor	0.92
BTU/H (Max.) BTU/H (Min.)	180,000 16,000
Thermal Efficiency	93%
Maximum Flow Rate (GPM – Gallons Per Minute)	9.8
viaximum riow riate (cir ivi – cialions r er ivilitate)	5.0
Features	
Flow Meter Alarm	Yes
Freeze Prevention	Yes
Direct Electronic Ignition	Yes
Lightning Protection	Yes
Recirculation Compatible	Yes
Number of Temperature Settings with Remote (°F) (5° Increments)	100, 105, 110, 115, 120 125, 130, 135, 140
Power Cord Included	Yes
	Yes
Warranty ¹	169
Additional Features	
ENERGY STAR® Certified	Yes
NSF® Certified	Yes
Accessories	
Condensate Neutralizer Kit – PN# TWHNEUTRAL	Optional
Horizontal Concentric Vent Termination –	
PN# TWHHORCONC Horizontal Installation Kit – PN# TWHHORKIT	Optional
(Application Specific)	Required
Horizontal Vent Termination – PN# TWHHORHOOD (Horizontal Dual Penetration)	Optional
Quick Connect Cord – PN# TWHQCCORD (Multiple Units)	Optional
Vertical Installation Kit – PN# TWHVERTKIT (Application Specific)	Required
Vertical Vent Termination – PN# TWHVERTCAP (Vertical Dual Penetration)	Optional
Specifications	Voc
Indoor Wall-Mounted	Yes Yes
Condensing Direct Vent (SV Convertible) Exhaust	Yes
Gas Connection Size	3/4" Threaded
Gas Inlet Location	Right Bottom
Water Connection Size	3/4" Threaded
Water Connection Size Water Inlet/Outlet Location	Left Bottom
Water Supply Pressure Range	15 - 150 psi
Condensate Connection Size	1/2" Threaded
Condensate Drain Location	Left Bottom
Power Cord Location	Middle Bottom
Voltage Rating	120V, 60Hz
Intake/Exhaust Vent Diameter	3" or 4"
Primary Heat Exchanger	Copper
Secondary Heat Exchanger	Stainless Steel
Color –	Starriess Steel
Stainless Steel	S
Product Dimensions	
Height	24-1/2"
	18-1/2"
Width Depth	9-1/2"

¹Lifetime limited warranty supported by a 1-year labor, 5-year parts and 12-year heat exchanger.



800-299-947

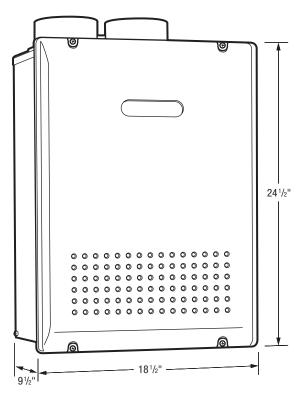

For complete Tankless Water Heater installation details, refer to Product Installation Guide on the web at electroluxappliances.com

Required Accessories

- Horizontal Installation Kit (PN# TWHHORKIT Application Specific).
- Vertical Installation Kit (PN# TWHVERTKIT Application Specific).

Optional Accessories

- Condensate Neutralizer Kit (PN# TWHNEUTRAL).
- Horizontal Concentric Vent Termination (PN# TWHHORCONC).
- Horizontal Vent Termination (PN# TWHHORHOOD Horizontal Dual Penetration).
- Quick Connect Cord (PN# TWHQCCORD Multiple Units).
- Vertical Vent Termination (PN# TWHVERTCAP Vertical Dual Penetration).

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

Performance Flow Chart

Temp Rise (F°)	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
EP18WI30LS (GPM*)	9.8	9.2	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0	3.7	3.5	3.4

*Gallons Per Minute

