



Tankless Water Heater EN18WI30L S

Natural Gas



Market in the state of the stat

Remote



Endless Hot Water

Hot water when you need it, for as long as you need it. That means no storage or shortage of hot water.



Energy Efficient More energy efficient than standard gas tank water heaters.



Compact Space Savings

With their smaller, compact size and wall-mounted installation, tankless hot water heaters take up significantly less room than traditional tank water heaters.



Premium Stainless Steel

Durable, premium stainless steel exterior.

NATURAL GAS TANKLESS WATER HEATER


Control Panel Features	
Hard-Wired Remote	Yes
Lockout	Yes
ED Digital Display	Yes
Tow Rate Display Mode	G / L
emperature Display Mode	°F / °C
Performance	
Energy Factor	0.91
3TU/H (Max.)	180,000
3TU/H (Min.)	16,000
hermal Efficiency	93%
/aximum Flow Rate (GPM - Gallons Per Minute)	9.8
eatures	
low Meter Alarm	Yes
reeze Prevention	Yes
Direct Electronic Ignition	Yes
ightning Protection	Yes
Recirculation Compatible	Yes
lumber of Temperature Settings with Remote (°F) (5° Increments)	100, 105, 110, 115, 120, 125, 130, 135, 140
Power Cord Included	Yes
Varranty ¹	Yes
Additional Features	
ENERGY STAR® Certified	Yes
NSF® Certified	Yes
Accessories	
Condensate Neutralizer Kit – PN# TWHNEUTRAL	Optional
Horizontal Concentric Vent Termination – PN# TWHHORCONC	Optional
Horizontal Installation Kit – PN# TWHHORKIT	Required
(Application Specific) Horizontal Vent Termination – PN# TWHHORHOOD (Horizontal Dual Penetration)	Optional
Quick Connect Cord – PN# TWHQCCORD (Multiple Units)	Optional
/ertical Installation Kit – PN# TWHVERTKIT (Application Specific)	Required
/ertical Vent Termination – PN# TWHVERTCAP (Vertical Dual Penetration)	Optional
· · · · · · · · · · · · · · · · · · ·	· ·
Specifications ndoor Wall-Mounted	Yes
Condensing	Yes
Direct Vent (SV Convertible) Exhaust	Yes
Gas Connection Size	3/4" Threaded
Gas Inlet Location	Right Bottom
Vater Connection Size Vater Inlet/Outlet Location	3/4" Threaded Left Bottom
Vater Supply Pressure Range	15 - 150 psi
Condensate Connection Size	1/2" Threaded
Condensate Drain Location	Left Bottom
Power Cord Location	Middle Bottom
/oltage Rating	120V, 60Hz
ntake/Exhaust Vent Diameter	3" or 4"
Primary Heat Exchanger	Copper
Secondary Heat Exchanger	Stainless Steel
Color – Stainless Steel	6
DIVIDUESS STEEL	S
	04.4/01
Product Dimensions	24-1/2"
Product Dimensions Height	
Product Dimensions Height Width	18-1/2"
Product Dimensions Height	

¹Lifetime limited warranty supported by a 1-year labor, 5-year parts and 12-year heat exchanger.

Natural Gas Tankless Water Heater



800-299-9470

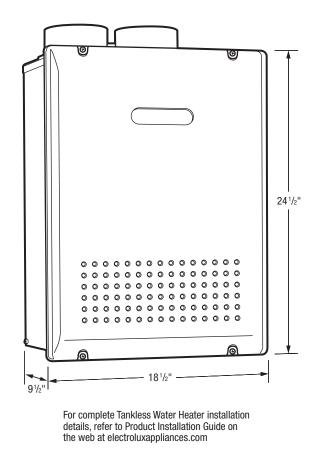

Required Accessories

- Horizontal Installation Kit (PN# TWHHORKIT Application Specific).
- Vertical Installation Kit (PN# TWHVERTKIT Application Specific).

Optional Accessories

- Condensate Neutralizer Kit (PN# TWHNEUTRAL).
- Horizontal Concentric Vent Termination (PN# TWHHORCONC).
 Horizontal Vent Termination (PN# TWHHORHOOD Horizontal
- Dual Penetration).
 Quick Connect Cord (PN# TWHQCCORD Multiple Units).
- Vertical Vent Termination (PN# TWHVERTCAP Vertical Dual Penetration).

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

Performance Flow Chart

Temp Rise (F°)	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
EN18WI30LS (GPM*)	9.8	9.2	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0	3.7	3.5	3.4

*Gallons Per Minute



USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electroluxappliances.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.