FRIGIDAIRE.

Freezer



Manual Defrost 5 Cu. Ft. Chest

Product Dimensions

| Height (Including Lid) | 32-1/2" |
|------------------------|---------|
| Width | 28-1/2" |
| Depth | 22" |
| | |

More Easy-To-Use Features

Manual Defrost

Defrost Water Drain Use the drain to conveniently remove water during defrosting.

Available in:

White (W)

Signature Features

Store-More[™] Removable Basket

Stay organized with our removable basket that can hold small frozen items, or be removed if you have large items that need to be stored.

Power-On Indicator Light

Know at a glance that your freezer is working.

Adjustable Temperature Control

Select the correct temperature for your needs.


Color-Coordinated Handle

FRIGIDAIRE

| F | Freezer | | |
|------------|-----------------|--|--|
| FFFC05M1QW | 5 Cu. Ft. Chest | | |

| Features | |
|---|-------------------|
| Defrost | Manual |
| Adjustable Temperature Control | Yes |
| Interior Lighting | |
| Store-More™ Removable Baskets | 1 |
| Food Organization System | |
| Defrost Water Drain | Yes |
| Lid Handle | Yes |
| Lock with Pop-Out Key | |
| Power-On Light | Yes |
| Certifications | |
| CSA Rating | Household |
| Specifications | |
| Total Capacity (Cu. Ft.) | 5.1 |
| Annual Energy (kWH) | 220 |
| Annual Energy Cost (.1065/kWH) | \$26 |
| Power Supply Connection Location | Right Bottom Rear |
| Voltage Rating | 120V/60Hz/5A |
| Connected Load (kW rating) @ 120 Volts1 | .6 |
| Amps @ 120 Volts | 5 |
| Minimum Circuit Required (Amps) | 15 |
| Shipping Weight (Approx.) | 85 Lbs. |

¹An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.

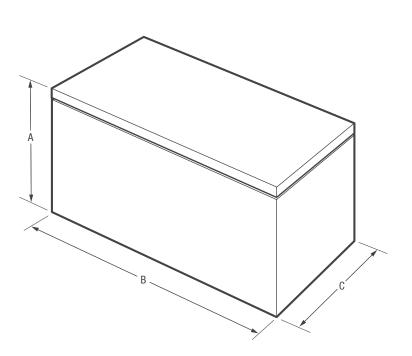

| Тор |) View | Recessed | outlet |
|-----|------------------------------------|--|--------|
| | | <u>*////*//////</u> | |
| * | allow 3" minim | air circulation, num clearance on h 1" at bottom | * * |


NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



| Product Dimensions | |
|--------------------------|----------|
| A-Height (Including Lid) | 32-1/2" |
| B-Width | 28-1/2" |
| C-Depth | 22" |
| Height with Lid Open 90° | 55-5/16″ |

Accessories information available on the web at **frigidaire.com**

FRIGIDAIRE USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca FFFC05M1Q 04/14

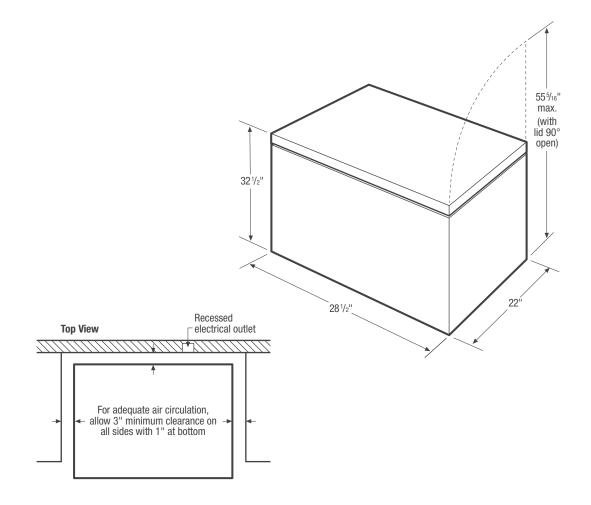

Chest Freezer Specifications

- Product Shipping Weight (approx.) 85 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of *National Electrical Code (NFPA 70)* and local codes & ordinances.
- Voltage Rating -120V/60Hz/5 Amps
- Connected Load (kW Rating)@120 Volts = 0.6 kW
- Amps@120 Volts = 5 Amps
- Always consult local and national electric codes.
- For adequate air circulation, allow 3" minimum clearance on all sides with 1" at bottom.
- $\,$ Locate where surrounding air temperature will not exceed 110° F, to ensure optimum performance. (Temperatures 32° F and below will NOT affect operation.)
- All bottom corners of unit MUST rest firmly on solid level surface of hard material, same height as flooring. Surface must be strong and stable enough to support unit when fully loaded.
- Equipped with adjustable leveling legs to ensure unit is level, which is required in order to function properly.
- Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.



USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca FFFC05M1Q 04/14